



REVISIONS				
REV	DESCRIPTION	ZONE	DATE	NAME
A	TDP Design			
B	ATA Cooled, changed spacings		2013-08-08	MCF

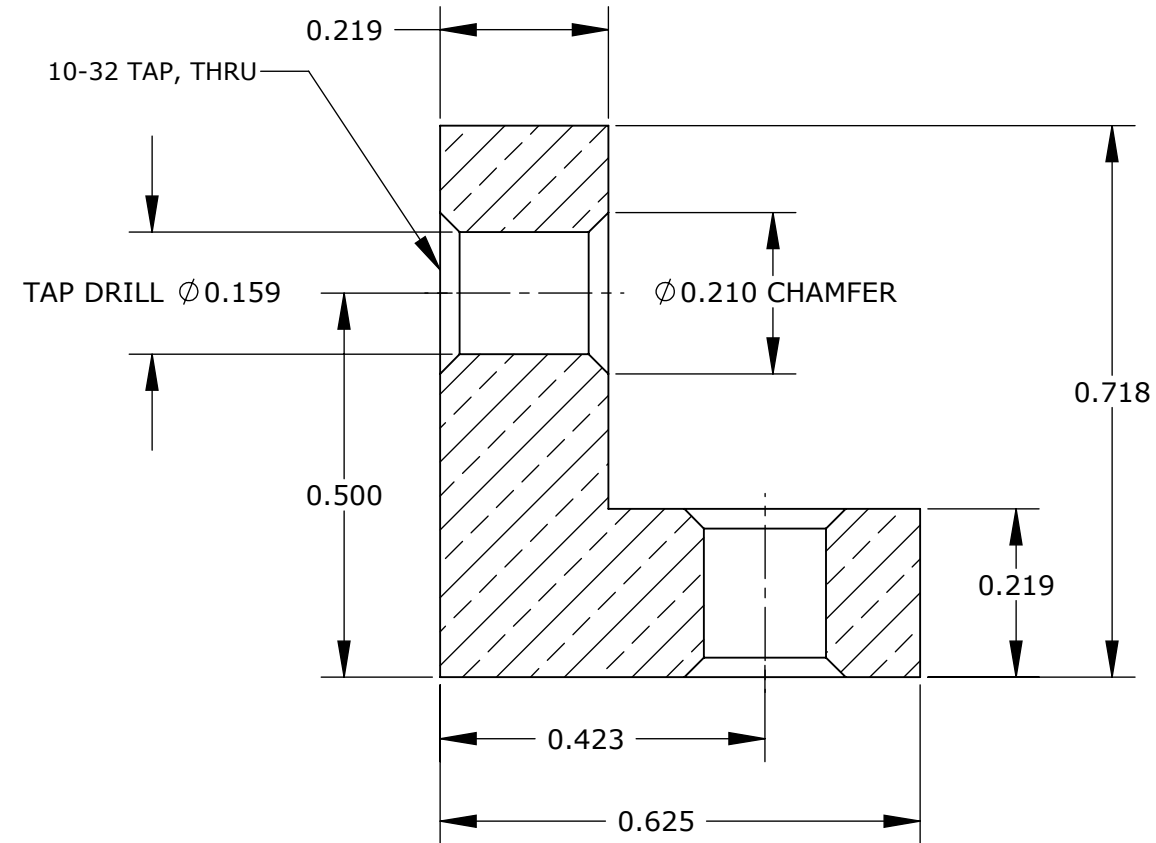


SECTION A-A

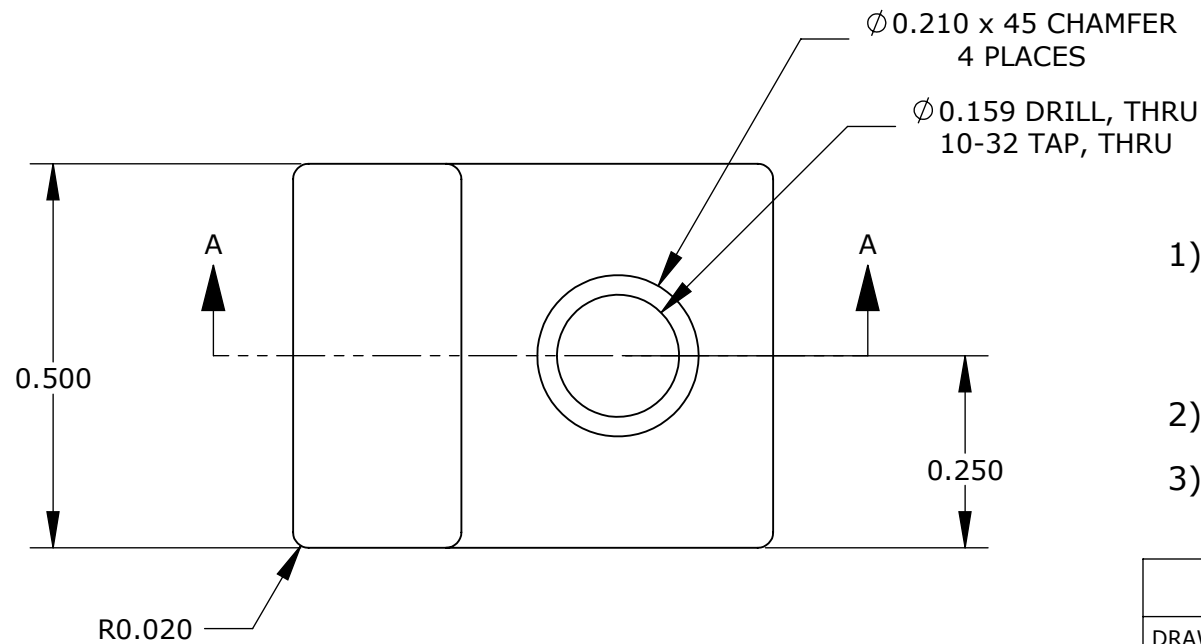

FILE NAME: 30-29-259-B Arm Anchor 02 Tapped
 LAST SAVED: Thursday, April 9, 2020 10:09:32 AM

THIS DRAWING IS THE PROPERTY OF AND CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO MINEX ENGINEERING CORP. AND SHALL BE USED ONLY FOR THE PURPOSE FOR WHICH IT WAS PROVIDED AND SHALL NOT BE REPRODUCED OR DISCLOSED TO OTHERS.

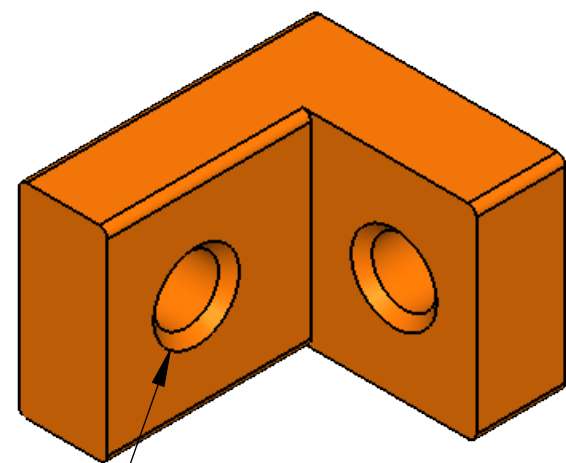

PART 30-29-258-B THIS HOLE IS CLEARANCE
 PART 30-29-259-B THIS HOLE IS TAPED

- 1) If gold plating is required by purchase order, use the following spec:
 Mil-G-45204, Type II, Grade C, Class 3
 Nickel underplating required 0.0001" thickness
- 2) 2nd option Silver plating
- 3) Surface Area of Part = 1.923 sq-in, Mass = 0.037 lbs.

NAME		DATE	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN: Inches			Minex Engineering Corp. 1000 Apollo Ct. Unit G, Antioch, CA 94509 Tel: 925-757-6785 Fax: 925-757-1083				
DRAWN: M C Fleming		2013-08-08	TOLERANCES:			LINEAR	ANG°		ATA Cooled Feed Arm Anchor 02 Tapped	
CHECKED: M C Fleming		2013-08-08				0.10	0.01			
MATERIAL: , ρ =										