


Phone Jacks


161-3400-EX, 161-3412-EX

KOBICONN


Phone Jacks






161-3412-EX



161-3400-EX



Circuit Diagram

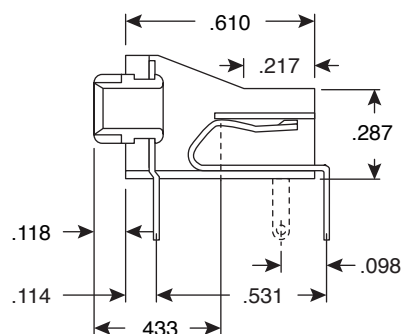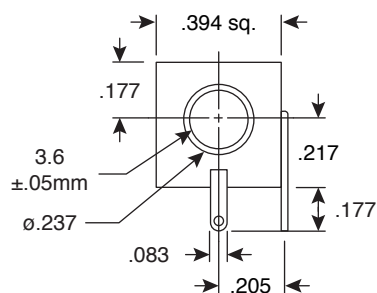

PCB Hole Layout

Dimensions: In.
Tolerance: ± 0.012 " (.3mm)
(except where noted)

SPECIFICATIONS

Type:	3.5mm mono jack with switch
Contact resistance:	20mΩ max.
Insulation resistance:	100MΩ min. @ 250VDC
Breakdown voltage:	500VAC for 1 minute
Knurled nut:	ø6 x .5mm (on 161-3400-EX only)
RoHS Compliant by Exemption	

Date Last Revised: 12-12-05

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC-300846

161-3400-EX, 161-3412-EX