


3.5mm Mono Jack

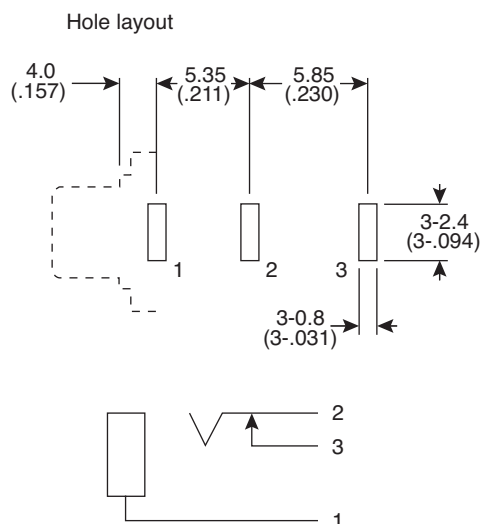

SPECIFICATIONS	
Dielectric Strength:	250V AC/minute
Insulation resistance:	50MΩ min. at 250V DC
Contact resistance:	50mΩ max.
Operating life:	10,000 cycles min.
Operating temperature:	-10° to +70°C
Soldering heat test:	Solder temperature: 260°C ±5°C
Dip time:	5±1 seconds
Contacts:	Brass, silver plated
Body material:	PBT + glass

KC-300423

161-3525