
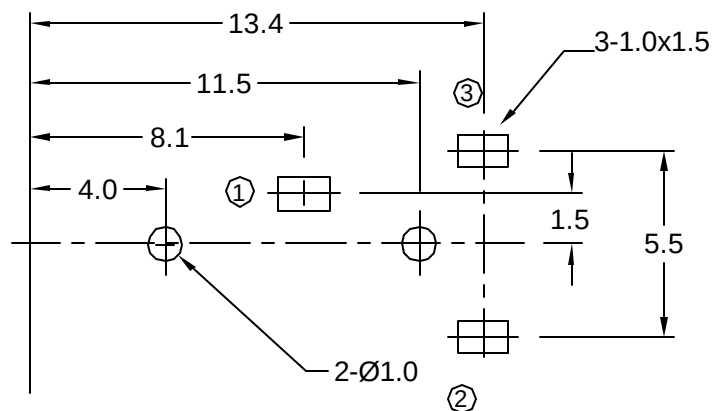



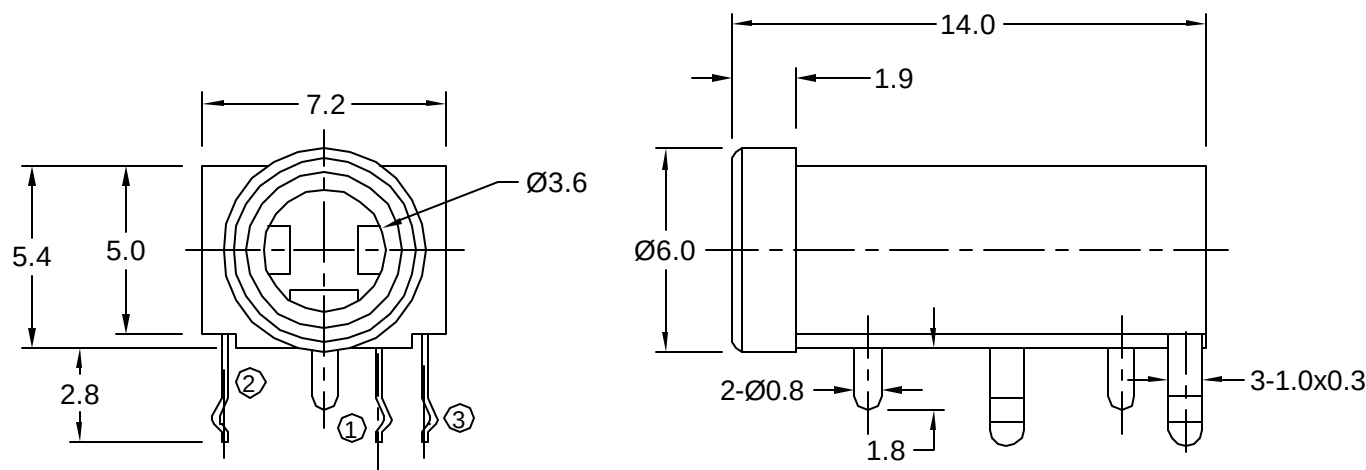

Recommended PCB Layout
(Bottom View)

Materials and Finish

Housing: PBT Thermoplastic,
UL 94V-0 Rated

Terminals: Phosphor Bronze
Tin plated

Mechanical Characteristics

Insertion Force:
0.4kg - 2.0kg

Extraction Force:
0.3kg - 2.0kg

Durability: 5000 mating cycles

Electrical Characteristics

Contact Resistance:
Before Test: 30mohms Max.
After Durability Test:
60 mohms Max.

Insulation Resistance:
More than 100 Megohms
at 250V DC

Dielectric Strength:
250V AC RMS for 1 minute


Operating Temp:
-25°C to +80°C

RoHS COMPLIANT
EU Directive 2002/95/EC



Tolerances	
X.X ± 0.25	
X.XX ± 0.15	
Unless Stated Otherwise	

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A0	9/13/05	New Drawing	R. Aguirre	H. MA	R. Aguirre	07/11/05
A1	2/7/06	Correct plastic body	R. Aguirre	H. MA		
B1	02/27/06	ECO 06-012	R. Aguirre	H. MA		
B2	4/3/06	ECO 06-024	H. MA	C.Furumasa		



UNITS
mm

STX-3000

3.5mm Stereo Jack ,RoHS Compliant

All Plastic Body, Rt Ang. PCB Mount

