



MTA .156" (3.96mm) Receptacles and Post Headers

A


IDC Connectors: • Wire-to-post connectors preloaded with dual beam contacts • Connectors and headers are end-to-end stackable • Connectors preloaded with IDC contacts • All contacts are slotted for insulation displacement (IDC) terminal technique • Contacts are lubricated to prevent fretting corrosion • Meets the material requirements of Table 23.1 of UL1410 Standards for Television Receiver and Video Products (wire-to-post connectors only) • Recognized under the Component Program of Underwriters Laboratories Inc., File No. E28476 • Certified by Canadian Standards Association, File No. LR7189 **Performance Data: Voltage Rating:** 250VAC **Current Rating:** 7A **Low-Level Resistance:** 3mΩ maximum initial **Dielectric Withstanding Voltage:** 1250VAC/1 minute **Insulation Resistance:** 5000MΩ min. initial **Operating Temperature:** -55°C ~ 105°C **Material and Finish – Housing:** UL94V-2 rated, type 6/6 nylon (24AWG - White; 22AWG - Red; 20AWG - Yellow; 18AWG - Orange) **Contacts:** Phosphor bronze, post tin plated, 30µ

Replacement IDC Contacts: Material and Finish: Phosphor bronze, post tin plated; 30µ

SL-156 Crimp Contacts and Housings: • High current rating • Mates with MTA and similar competitive notched headers • Rugged wire-to-board interconnection to mate with .045 square or round post headers • Housing made of flame retardant 6/6 nylon • Connectors are end-to-end stackable • Wire-to-board system offers polarization with friction lock for positive mating • Recognized under the Component Program of Underwriters Laboratories Inc., File No. E28476 • Certified by Canadian Standards Association, File No. LR7189 **Performance Data: Voltage Rating:** 250VAC **Current Rating:** 10A maximum @ 250VAC **Low-Level Resistance:** 3.0mΩ maximum initial **Dielectric Withstanding Voltage:** 2000VAC/1 minute **Insulation Resistance:** 1000MΩ minimum initial **Operating Temperature:** -55°C ~ 105°C **Material and Finish (Contacts):** Bright tin plated brass or phosphor bronze; .012 (0.3) pre-tin or 30µ over nickel **Wire Range:** 18-24AWG **Maximum Insulation Diameter:** .110 (2.79mm)

Keying Plug with Carrier Strip (10 plugs per strip): Material: UL94V-2 rated, type 6/6 nylon, natural color

Post Headers: Material For Housing: Polyester 94V-0 rated, white **Posts:** Copper alloy

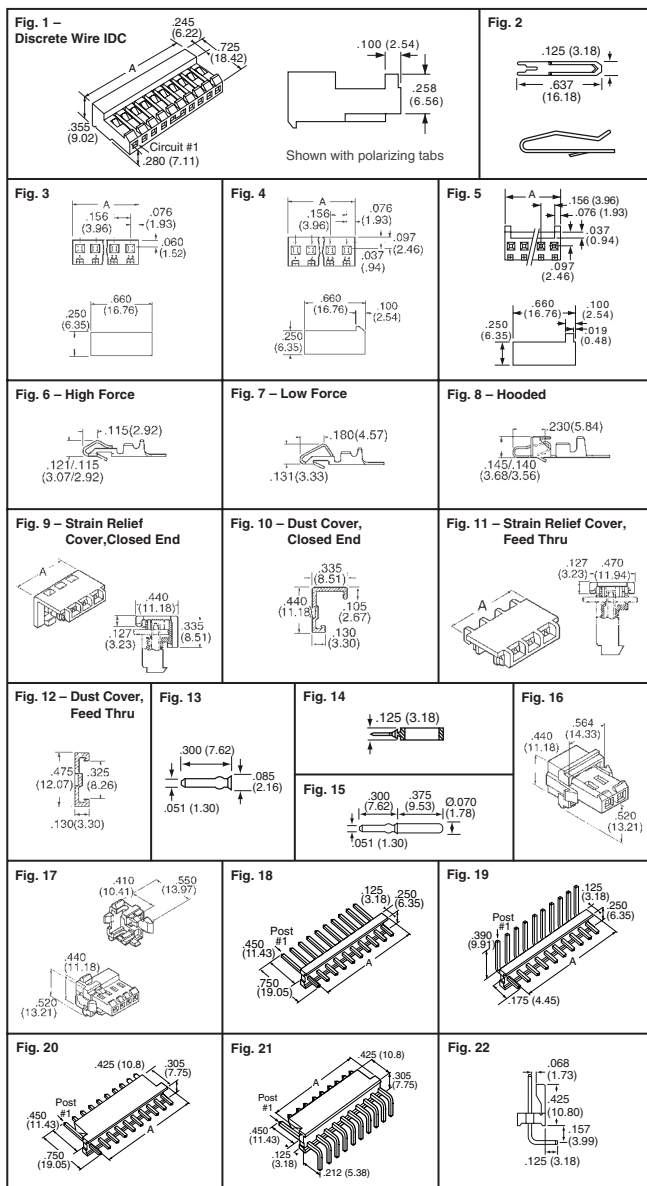

Description	Digi-Key Part No.	Price Each	AMP Part No.
Tools			
Crimp Tool with Die for SL-156 Contacts .060"-100" Insulation Diameter	A30703-ND	551.57	91597-1
Crimp Tool with Die for SL-156 Contacts .043"-075" Insulation Diameter	A30704-ND	551.57	91598-1
T-Handle Tool Prototype Tool for MTA .156" (3.96mm) IDC Connectors	A9981-ND	18.29	59804-1
Crimp Die for MTA .156" (3.96mm) IDC, Closed End Receptacles (Must be used with handle A2031-ND) ...	A1999-ND	122.85	58247-1
Crimp Die for MTA .156" (3.96mm) IDC, Feed Thru Receptacles (Must be used with handle A2031-ND) ...	A30528-ND	448.88	58443-1
Manual Pistol Grip Tool IDC (Must order crimp die separately)	A2031-ND	58.28	58074-1

Fig.	Description	Circuits	Dim. A Inch (mm)	Digi-Key Part No.	Pricing 1 25	AMP Part No.
Receptacles, .156" (3.96mm) Centers						
1	RoHS Compliant Closed End with Lock without Polarizing Tabs, 26 AWG Blue, Tin Plated	2	.312 (7.92)	A31216-ND	.63 14.23	3-640430-2
		3	.468 (11.89)	A31217-ND	.21 3.80	3-640430-3
		4	.624 (15.85)	A31218-ND	.30 6.82	3-640430-4
		5	.780 (19.81)	A31219-ND	.61 13.88	3-640430-5
		6	.936 (23.77)	A31220-ND	.39 8.93	3-640430-6
		7	1.092 (27.74)	A31221-ND	.78 17.66	3-640430-7
		8	1.248 (31.70)	A31222-ND	.89 20.18	3-640430-8
		9	1.404 (35.66)	A31223-ND	1.00 22.71	3-640430-9
		10	1.560 (39.62)	A31224-ND	1.11 25.23	4-640430-0
		11	1.716 (43.59)	A31225-ND	1.23 27.75	4-640430-1
		12	1.872 (47.55)	A31226-ND	1.34 30.27	4-640430-2
		17	2.652 (67.36)	A31227-ND	.89 20.22	4-640430-7
		2	.312 (7.92)	A31604-ND	.25 5.55	3-643821-2
		3	.468 (11.89)	A31605-ND	.21 3.80	3-643821-3
		4	.624 (15.85)	A31606-ND	.31 7.10	3-643821-4
		5	.780 (19.81)	A31607-ND	.61 13.88	3-64321-5
		6	.936 (23.77)	A31608-ND	.41 9.26	3-64321-6
1	RoHS Compliant Closed End with Lock with Polarizing Tabs, 26 AWG Blue, Tin Plated	7	1.092 (27.74)	A31609-ND	.78 17.66	3-643821-7
		8	1.248 (31.70)	A31610-ND	.89 20.18	3-643821-8
		9	1.404 (35.66)	A31611-ND	1.00 22.71	3-643821-9
		10	1.560 (39.62)	A31612-ND	1.11 25.23	4-643821-0
		11	1.716 (43.59)	A31613-ND	1.23 27.75	4-643821-1
		12	1.872 (47.55)	A31614-ND	1.34 30.27	4-643821-2
		17	2.652 (67.36)	A31615-ND	.89 20.22	4-643821-7
		2	.312 (7.92)	A31580-ND	.21 3.86	3-640435-2
		3	.468 (11.89)	A31581-ND	.21 3.80	3-640435-3
		4	.624 (15.85)	A31582-ND	.30 6.82	3-640435-4
		5	.780 (19.81)	A31583-ND	.61 13.88	3-640435-5
		6	.936 (23.77)	A31584-ND	.39 8.93	3-640435-6
		7	1.092 (27.74)	A31585-ND	.78 17.66	3-640435-7
		8	1.248 (31.70)	A31586-ND	.89 20.18	3-640435-8
		9	1.404 (35.66)	A31587-ND	1.00 22.71	3-640435-9
		10	1.560 (39.62)	A31588-ND	1.11 25.23	4-640435-0
		11	1.716 (43.59)	A31589-ND	1.23 27.75	4-640435-1
		12	1.872 (47.55)	A31590-ND	1.34 30.27	4-640435-2
		17	2.652 (67.36)	A31591-ND	.89 20.16	4-640435-7
1	RoHS Compliant Feed-Thru with Lock without Polarizing Tabs, 26 AWG Blue, Tin Plated	2	.312 (7.92)	A31592-ND	.21 3.86	3-640595-2
		3	.468 (11.89)	A31593-ND	.28 6.45	3-640595-3
		4	.624 (15.85)	A31594-ND	.33 7.36	3-640595-4
		5	.780 (19.81)	A31595-ND	.61 13.88	3-640595-5
		6	.936 (23.77)	A31596-ND	.39 8.93	3-640595-6
		7	1.092 (27.74)	A31597-ND	.78 17.66	3-640595-7
		8	1.248 (31.70)	A31598-ND	.89 20.18	3-640595-8
		9	1.404 (35.66)	A31599-ND	1.00 22.71	3-640595-9
		10	1.560 (39.62)	A31600-ND	1.11 25.23	4-640595-0
		11	1.716 (43.59)	A31601-ND	1.23 27.75	4-640595-1
		12	1.872 (47.55)	A31602-ND	1.34 30.27	4-640595-2
		17	2.652 (67.36)	A31603-ND	.89 20.22	4-640595-7
1	Closed End with Lock without Polarizing Tabs, 24 AWG White, Tin Plated	5	.780 (19.81)	A19633-ND	1.57 35.63	640429-5
1	RoHS Compliant Closed End with Lock without Polarizing Tabs, 24 AWG White, Tin Plated	2	.312 (7.92)	A31240-ND	.30 5.55	3-640429-2
		3	.468 (11.89)	A31241-ND	.21 3.80	3-640429-3
		4	.624 (15.85)	A31242-ND	.30 6.82	3-640429-4
		5	.780 (19.81)	A31243-ND	1.47 33.37	3-640429-5
		6	.936 (23.77)	A31244-ND	.39 8.93	3-640429-6
		7	1.092 (27.74)	A31245-ND	.78 17.66	3-640429-7
		8	1.248 (31.70)	A31246-ND	1.18 26.65	3-640429-8
		9	1.404 (35.66)	A31247-ND	1.00 22.71	3-640429-9
		10	1.560 (39.62)	A31248-ND	1.11 25.23	4-640429-0
		11	1.716 (43.59)	A31249-ND	1.23 27.75	4-640429-1
		12	1.872 (47.55)	A31250-ND	1.34 30.27	4-640429-2
		17	2.652 (67.36)	A31251-ND	.89 20.16	4-640429-7

(Continued)

More Product Available Online: www.digikey.com

188 (T082)

Toll-Free: 1-800-344-4539 • Phone 218-681-6674 • Fax: 218-681-3380

A

Fig.	Description	Circuits	Dim. A Inch (mm)	Digi-Key Part No.	Pricing 1 25	AMP Part No.
1	RoHS Compliant Closed End with Lock with Polarizing Tabs, 24 AWG White, Tin Plated	2	.312 (7.92)	A31643-ND	.32 5.55	3-643820-2
		3	.468 (11.89)	A31644-ND	.21 3.94	3-643820-3
		4	.624 (15.85)	A31645-ND	.30 6.82	3-643820-4
		5	.780 (19.81)	A31646-ND	.61 13.88	3-643820-5
		6	.936 (23.77)	A31647-ND	.39 8.93	3-643820-6
		7	1.092 (27.74)	A31648-ND	.78 17.66	3-643820-7
		8	1.248 (31.70)	A31649-ND	.89 20.18	3-643820-8
		9	1.404 (35.66)	A31650-ND	1.00 22.71	3-643820-9
		10	1.560 (39.62)	A31651-ND	1.11 25.23	3-643820-0
		11	1.716 (43.59)	A31652-ND	1.23 27.75	4-643820-1
		12	1.872 (47.55)	A31653-ND	1.34 30.27	4-643820-2
1	Closed End without Lock without Polarizing Tabs, 24 AWG White, Tin Plated	7	1.092 (27.74)	A26063-ND	2.00 45.35	640434-7
		8	1.248 (31.70)	A26064-ND	.95 21.55	640434-8
1	RoHS Compliant Closed End without Lock without Polarizing Tabs, 24 AWG White, Tin Plated	2	.312 (7.92)	A31264-ND	.31 3.86	3-640434-2
		3	.468 (11.89)	A31265-ND	.21 3.80	3-640434-3
		4	.624 (15.85)	A31266-ND	.30 6.82	3-640434-4
		5	.780 (19.81)	A31267-ND	.61 13.88	3-640434-5
		6	.936 (23.77)	A31268-ND	.39 8.93	3-640434-6
		7	1.092 (27.74)	A31269-ND	1.88 42.46	3-640434-7
		8	1.248 (31.70)	A31270-ND	.89 20.18	3-640434-8
		9	1.404 (35.66)	A31271-ND	1.00 22.71	3-640434-9
		10	1.560 (39.62)	A31272-ND	1.11 25.23	4-640434-0
		11	1.716 (43.59)	A31273-ND	1.23 27.75	4-640434-1
		12	1.872 (47.55)	A31274-ND	1.34 30.27	4-640434-2
1	Feed-Thru with Lock without Polarizing Tabs, 24 AWG White, Tin Plated	17	2.652 (67.36)	A31275-ND	.89 20.16	4-640434-7
1	Feed-Thru with Lock without Polarizing Tabs, 24 AWG White, Tin Plated	9	1.404 (35.66)	A19727-ND	1.45 32.73	640602-9
		10	1.560 (39.62)	A19728-ND	1.61 36.37	1-640602-0
1	RoHS Compliant Feed-Thru with Lock without Polarizing Tabs, 24 AWG White, Tin Plated	2	.312 (7.92)	A31628-ND	.24 4.44	3-640602-2
		3	.468 (11.89)	A31629-ND	.28 6.44	3-640602-3
		4	.624 (15.85)	A31630-ND	.30 6.82	3-640602-4
		5	.780 (19.81)	A31631-ND	.61 13.88	3-640602-5
		6	.936 (23.77)	A31632-ND	.39 8.93	3-640602-6
		7	1.092 (27.74)	A31633-ND	.78 17.66	3-640602-7
		8	1.248 (31.70)	A31634-ND	.89 20.18	3-640602-8
		9	1.404 (35.66)	A31635-ND	1.00 22.71	3-640602-9
		10	1.560 (39.62)	A31636-ND	1.11 25.23	4-640602-0
		11	1.716 (43.59)	A31637-ND	1.23 27.75	4-640602-1
		12	1.872 (47.55)	A31638-ND	1.34 30.27	4-640602-2
1	Closed End with Lock without Polarizing Tabs, 22 AWG Red, Tin Plated	17	2.652 (67.36)	A31639-ND	.89 20.16	4-640602-7
1	Closed End with Lock without Polarizing Tabs, 22 AWG Red, Tin Plated	11	1.716 (43.59)	A19619-ND	1.77 40.01	1-640428-1
1	RoHS Compliant Closed End with Lock without Polarizing Tabs, 22 AWG Red, Tin Plated	2	.312 (7.92)	A31228-ND	.30 5.55	3-640428-2
		3	.468 (11.89)	A31229-ND	.21 3.80	3-640428-3
		4	.624 (15.85)	A31230-ND	.30 6.82	3-640428-4
		5	.780 (19.81)	A31231-ND	.61 13.88	3-640428-5
		6	.936 (23.77)	A31232-ND	.39 8.93	3-640428-6
		7	1.092 (27.74)	A31233-ND	1.88 42.46	3-640428-7
		8	1.248 (31.70)	A31234-ND	.89 20.18	3-640428-8
		9	1.404 (35.66)	A31235-ND	1.00 22.71	3-640428-9
		10	1.560 (39.62)	A31236-ND	1.11 25.23	4-640428-0
		11	1.716 (43.59)	A31237-ND	1.23 27.75	4-640428-1
		12	1.872 (47.55)	A31238-ND	1.34 30.27	4-640428-2
1	Closed End with Lock without Polarizing Tabs, 22 AWG Red, Tin Plated	17	2.652 (67.36)	A31239-ND	.91 20.61	4-640428-7
1	RoHS Compliant Closed End with Lock with Polarizing Tabs, 22 AWG Red, Tin Plated	2	.312 (7.92)	A31276-ND	.30 5.55	3-643819-2
		3	.468 (11.89)	A31277-ND	.21 3.80	3-643819-3
		4	.624 (15.85)	A31278-ND	.30 6.82	3-643819-4
		5	.780 (19.81)	A31279-ND	1.47 33.37	3-643819-5
		6	.936 (23.77)	A31280-ND	.39 8.93	3-643819-6
		7	1.092 (27.74)	A31281-ND	1.34 30.26	3-643819-7
		8	1.248 (31.70)	A31282-ND	.89 20.18	3-643819-8
		9	1.404 (35.66)	A31283-ND	1.00 22.71	3-643819-9
		10	1.560 (39.62)	A31284-ND	1.11 25.23	4-643819-0
		11	1.716 (43.59)	A31640-ND	1.23 27.75	4-643819-1
		12	1.872 (47.55)	A31641-ND	1.34 30.27	4-643819-2
1	Closed End without Lock without Polarizing Tabs, 22 AWG Red, Tin Plated	17	2.652 (67.36)	A31642-ND	1.66 37.63	4-643819-7
1	Closed End without Lock without Polarizing Tabs, 22 AWG Red, Tin Plated	10	1.560 (39.62)	A24001-ND	2.86 64.79	1-640433-0

Fig.	Description	Circuits	Dim. A Inch (mm)	Digi-Key Part No.	Pricing 1 25	AMP Part No.
1	RoHS Compliant Closed End without Lock without Polarizing Tabs, 22 AWG Red, Tin Plated	2	.312 (7.92)	A31252-ND	.30 5.55	3-640433-2
		3	.468 (11.89)	A31253-ND	.21 3.80	3-640433-3
		4	.624 (15.85)	A31254-ND	.30 6.82	3-640433-4
		5	.780 (19.81)	A31255-ND	.61 13.88	3-640433-5
		6	.936 (23.77)	A31256-ND	.39 8.93	3-640433-6
		7	1.092 (27.74)	A31257-ND	.78 17.66	3-640433-7
		8	1.248 (31.70)	A31258-ND	1.21 27.29	3-640433-8
		9	1.404 (35.66)	A31259-ND	1.00 22.71	3-640433-9
		10	1.560 (39.62)	A31260-ND	1.38 31.29	4-640433-0
		11	1.716 (43.59)	A31261-ND	1.23 27.75	4-640433-1
		12	1.872 (47.55)	A31262-ND	1.61 36.54	4-640433-2
17	2.652 (67.36)	A31263-ND	1.48 33.60	4-640433-7		
1	RoHS Compliant Closed End without Lock with Polarizing Tabs, 22 AWG Red, Tin Plated	2	.312 (7.92)	A31285-ND	.30 5.55	3-644463-2
		3	.468 (11.89)	A31286-ND	.29 6.49	3-644463-3
		4	.624 (15.85)	A31287-ND	.30 6.82	3-644463-4
		5	.780 (19.81)	A31288-ND	.61 13.88	3-644463-5
		6	.936 (23.77)	A31289-ND	.39 8.93	3-644463-6
		7	1.092 (27.74)	A31290-ND	.78 17.66	3-644463-7
		8	1.248 (31.70)	A31291-ND	.89 20.18	3-644463-8
		9	1.404 (35.66)	A31292-ND	1.00 22.71	3-644463-9
		10	1.560 (39.62)	A31293-ND	1.11 25.23	4-644463-0
		11	1.716 (43.59)	A31294-ND	1.23 27.75	4-644463-1
		12	1.872 (47.55)	A31295-ND	1.34 30.27	4-644463-2
1	Feed-Thru with Lock without Polarizing Tabs, 22 AWG Red, Tin Plated	5	.780 (19.81)	A19703-ND	1.28 29.02	640601-5
1	RoHS Compliant Feed-Thru with Lock without Polarizing Tabs, 22 AWG Red, Tin Plated	2	.312 (7.92)	A31616-ND	.76 17.21	3-640601-2
		3	.468 (11.89)	A31617-ND	.28 6.44	3-640601-3
		4	.624 (15.85)	A31618-ND	.31 7.11	3-640601-4
		5	.780 (19.81)	A31619-ND	1.20 27.17	3-640601-5
		6	.936 (23.77)	A31620-ND	.39 8.93	3-640601-6
		7	1.092 (27.74)	A31621-ND	.78 17.66	3-640601-7
		8	1.248 (31.70)	A31622-ND	.89 20.18	3-640601-8
		9	1.404 (35.66)	A31623-ND	1.00 22.71	3-640601-9
		10	1.560 (39.62)	A31624-ND	1.63 36.83	4-640601-0
		11	1.716 (43.59)	A31625-ND	1.23 27.75	4-640601-1
		12	1.872 (47.55)	A31626-ND	1.34 30.27	4-640601-2
17	2.652 (67.36)	A31627-ND	.91 20.61	4-640601-7		
1	RoHS Compliant Closed End with Lock without Polarizing Tabs, 20 AWG Yellow, Tin Plated	2	.312 (7.92)	A31308-ND	.30 5.55	3-640427-2
		3	.468 (11.89)	A31309-ND	.21 3.80	3-640427-3
		4	.624 (15.85)	A31310-ND	.30 6.82	3-640427-4
		5	.780 (19.81)	A31311-ND	.61 13.88	3-640427-5
		6	.936 (23.77)	A31312-ND	.44 9.89	3-640427-6
		7	1.092 (27.74)	A31313-ND	.78 17.66	3-640427-7
		8	1.248 (31.70)	A31314-ND	.89 20.18	3-640427-8
		9	1.404 (35.66)	A31315-ND	1.29 29.10	3-640427-9
		10	1.560 (39.62)	A31316-ND	1.11 25.23	4-640427-0
		11	1.716 (43.59)	A31317-ND	1.23 27.75	4-640427-1
		12	1.872 (47.55)	A31318-ND	1.34 30.27	4-640427-2
17	2.652 (67.36)	A31319-ND	.91 20.61	4-640427-7		
1	Closed End with Lock with Polarizing Tabs, 20 AWG Yellow, Tin Plated	10	1.560 (39.62)	A26103-ND	2.86 64.79	1-643818-0
		11	1.716 (43.59)	A26104-ND	1.77 40.01	1-643818-1
1	RoHS Compliant Closed End with Lock with Polarizing Tabs, 20 AWG Yellow, Tin Plated	2	.312 (7.92)	A31363-ND	.30 5.55	3-643818-2
		3	.468 (11.89)	A31364-ND	.21 3.80	3-643818-3
		4	.624 (15.85)	A31365-ND	.30 6.82	3-643818-4
		5	.780 (19.81)	A31366-ND	.61 13.88	3-643818-5
		6	.936 (23.77)	A31367-ND	.39 8.93	3-643818-6
		7	1.092 (27.74)	A31368-ND	.78 17.66	3-643818-7
		8	1.248 (31.70)	A31369-ND	.89 20.18	3-643818-8
		9	1.404 (35.66)	A31370-ND	1.00 22.71	3-643818-9
		10	1.560 (39.62)	A31671-ND	1.38 31.31	4-643818-0
		11	1.716 (43.59)	A33192-ND	1.23 27.75	4-643818-1
		12	1.872 (47.55)	A31371-ND	1.34 30.27	4-643818-2
17	2.652 (67.36)	A33193-ND	1.15 26.13	4-643818-7		
1	Closed End without Lock without Polarizing Tabs, 20 AWG Yellow, Tin Plated	17	2.652 (67.36)	A24015-ND	.97 22.01	1-640432-7

MTA .156" (3.96mm) Receptacles and Post Headers (Cont.)

A

Fig.	Description	Circuits	Dim. A Inch (mm)	Digi-Key Part No.	Pricing 1 25	AMP Part No.
1	RoHS Compliant Closed End without Lock without Polarizing Tabs, 20 AWG Yellow, Tin Plated	2	.312 (7.92)	A31332-ND	.76 17.22	3-640432-2
		3	.468 (11.89)	A31333-ND	.21 3.80	3-640432-3
		4	.624 (15.85)	A31334-ND	.30 6.82	3-640432-4
		5	.780 (19.81)	A31335-ND	.61 13.88	3-640432-5
		6	.936 (23.77)	A31336-ND	.39 8.93	3-640432-6
		7	1.092 (27.74)	A31337-ND	.78 17.66	3-640432-7
		8	1.248 (31.70)	A31338-ND	.89 20.18	3-640432-8
		9	1.404 (35.66)	A31339-ND	1.00 22.71	3-640432-9
		10	1.560 (39.62)	A31340-ND	1.11 25.23	4-640432-0
		11	1.716 (43.59)	A31341-ND	1.23 27.75	4-640432-1
		12	1.872 (47.55)	A31342-ND	1.34 30.27	4-640432-2
1	Feed-Thru with Lock without Polarizing Tabs, 20 AWG Yellow, Tin Plated	17	2.652 (67.36)	A31343-ND	.91 20.61	4-640432-7
		9	1.404 (35.66)	A19687-ND	2.58 58.31	640600-9
1	RoHS Compliant Feed-Thru with Lock without Polarizing Tabs, 20 AWG Yellow, Tin Plated	2	.312 (7.92)	A31655-ND	.76 17.22	3-640600-2
		3	.468 (11.89)	A31656-ND	.29 6.50	3-640600-3
		4	.624 (15.85)	A31657-ND	.32 7.18	3-640600-4
		5	.780 (19.81)	A31658-ND	.61 13.88	3-640600-5
		6	.936 (23.77)	A31659-ND	.39 8.93	3-640600-6
		7	1.092 (27.74)	A31660-ND	.78 17.66	3-640600-7
		8	1.248 (31.70)	A31661-ND	.89 20.18	3-640600-8
		9	1.404 (35.66)	A31662-ND	1.54 34.81	3-640600-9
		10	1.560 (39.62)	A31663-ND	1.11 25.23	4-640600-0
		11	1.716 (43.59)	A31664-ND	1.23 27.75	4-640600-1
		12	1.872 (47.55)	A31665-ND	1.34 30.27	4-640600-2
1	RoHS Compliant Feed-Thru with Lock with Polarizing Tabs, 20 AWG Yellow, Tin Plated	17	2.652 (67.36)	A31666-ND	.91 20.61	4-640600-7
		2	.312 (7.92)	A31383-ND	.30 5.55	3-644466-2
		3	.468 (11.89)	A31384-ND	.29 6.50	3-644466-3
		4	.624 (15.85)	A31385-ND	.32 7.18	3-644466-4
		5	.780 (19.81)	A31386-ND	.61 13.88	3-644466-5
		6	.936 (23.77)	A31387-ND	.39 8.93	3-644466-6
		7	1.092 (27.74)	A31388-ND	.78 17.66	3-644466-7
		8	1.248 (31.70)	A31389-ND	.89 20.18	3-644466-8
		9	1.404 (35.66)	A31390-ND	1.00 22.71	3-644466-9
		10	1.560 (39.62)	A31391-ND	1.11 25.23	4-644466-0
		11	1.716 (43.59)	A31392-ND	1.23 27.75	4-644466-1
1	RoHS Compliant Closed End with Lock without Polarizing Tabs, 18 AWG Orange, Tin Plated	12	1.872 (47.55)	A31393-ND	1.34 30.27	4-644466-2
		2	.312 (7.92)	A31296-ND	.30 5.55	3-640426-2
		3	.468 (11.89)	A31297-ND	.31 5.66	3-640426-3
		4	.624 (15.85)	A31298-ND	.45 10.17	3-640426-4
		5	.780 (19.81)	A31299-ND	.61 13.88	3-640426-5
		6	.936 (23.77)	A31300-ND	.39 8.93	3-640426-6
		7	1.092 (27.74)	A31301-ND	.78 17.66	3-640426-7
		8	1.248 (31.70)	A31302-ND	.89 20.18	3-640426-8
		9	1.404 (35.66)	A31303-ND	1.00 22.71	3-640426-9
		10	1.560 (39.62)	A31304-ND	1.11 25.23	4-640426-0
		11	1.716 (43.59)	A31305-ND	1.23 27.75	4-640426-1
1	Closed End with Lock with Polarizing Tabs, 18 AWG Orange, Tin Plated	12	1.872 (47.55)	A31306-ND	1.34 30.27	4-640426-2
		17	2.652 (67.36)	A31307-ND	.89 20.23	4-640426-7
1	RoHS Compliant Closed End with Lock with Polarizing Tabs, 18 AWG Orange, Tin Plated	10	1.560 (39.62)	A26125-ND	2.71 61.38	1-643817-0
		2	.312 (7.92)	A31355-ND	.30 5.55	3-643817-2
		3	.468 (11.89)	A31356-ND	.21 3.80	3-643817-3
		4	.624 (15.85)	A31357-ND	.30 6.82	3-643817-4
		5	.780 (19.81)	A31358-ND	.61 13.88	3-643817-5
		6	.936 (23.77)	A31359-ND	.39 8.93	3-643817-6
		7	1.092 (27.74)	A31360-ND	1.31 29.75	3-643817-7
		8	1.248 (31.70)	A31361-ND	.89 20.18	3-643817-8
		9	1.404 (35.66)	A31667-ND	1.19 26.96	3-643817-9
		10	1.560 (39.62)	A31668-ND	1.11 25.23	4-643817-0
		11	1.716 (43.59)	A31362-ND	1.70 38.48	4-643817-1
1	Closed End without Lock without Polarizing Tabs, 18 AWG Orange, Tin Plated	12	1.872 (47.55)	A31669-ND	1.59 35.95	4-643817-2
		17	2.652 (67.36)	A31670-ND	1.66 37.63	4-643817-7
1	Closed End without Lock without Polarizing Tabs, 18 AWG Orange, Tin Plated	17	2.652 (67.36)	A24028-ND	.95 21.61	1-640431-7
		2	.312 (7.92)	A31320-ND	.30 5.55	3-640431-2
1	RoHS Compliant Closed End without Lock without Polarizing Tabs, 18 AWG Orange, Tin Plated	3	.468 (11.89)	A31321-ND	.21 3.80	3-640431-3
		4	.624 (15.85)	A31322-ND	.30 6.82	3-640431-4
		5	.780 (19.81)	A31323-ND	.61 13.88	3-640431-5
		6	.936 (23.77)	A31324-ND	.39 8.93	3-640431-6
		7	1.092 (27.74)	A31325-ND	.78 17.66	3-640431-7
		8	1.248 (31.70)	A31326-ND	.89 20.18	3-640431-8

Fig.	Description	Circuits	Dim. A Inch (mm)	Digi-Key Part No.	Pricing 125	AMP Part No.		
1	RoHS Compliant Closed End without Lock without Polarizing Tabs, 18 AWG Orange, Tin Plated	9	1.404 (35.66)	A31327-ND	1.00 22.71	3-640431-9		
		10	1.560 (39.62)	A31328-ND	1.11 25.23	4-640431-0		
		11	1.716 (43.59)	A31329-ND	1.23 27.75	4-640431-1		
		12	1.872 (47.55)	A31330-ND	1.34 30.27	4-640431-2		
		17	2.652 (67.36)	A31331-ND	.89 20.23	4-640431-7		
1	RoHS Compliant Feed-Thru with Lock without Polarizing Tabs, 18 AWG Orange, Tin Plated	2	.312 (7.92)	A31344-ND	.30 5.55	3-640599-2		
		3	.468 (11.89)	A31345-ND	.28 6.44	3-640599-3		
		4	.624 (15.85)	A31346-ND	.31 7.09	3-640599-4		
		5	.780 (19.81)	A31347-ND	.61 13.88	3-640599-5		
		6	.936 (23.77)	A31348-ND	.39 8.93	3-640599-6		
		7	1.092 (27.74)	A31349-ND	1.31 29.76	3-640599-7		
		8	1.248 (31.70)	A31350-ND	.89 20.18	3-640599-8		
		9	1.404 (35.66)	A31351-ND	1.00 22.71	3-640599-9		
		10	1.560 (39.62)	A31352-ND	1.11 25.23	4-640599-0		
		11	1.716 (43.59)	A31353-ND	1.70 38.45	4-640599-1		
12	1.872 (47.55)	A31354-ND	1.34 30.27	4-640599-2				
1	RoHS Compliant Feed-Thru with Lock with Polarizing Tabs, 18 AWG Orange, Tin Plated	2	.312 (7.92)	A31372-ND	.30 5.55	3-644465-2		
		3	.468 (11.89)	A31373-ND	.28 6.42	3-644465-3		
		4	.624 (15.85)	A31374-ND	.31 7.09	3-644465-4		
		5	.780 (19.81)	A31375-ND	.61 13.88	3-644465-5		
		6	.936 (23.77)	A31376-ND	.39 8.93	3-644465-6		
		7	1.092 (27.74)	A31377-ND	.78 17.66	3-644465-7		
		8	1.248 (31.70)	A31378-ND	.89 20.18	3-644465-8		
		9	1.404 (35.66)	A31379-ND	1.00 22.71	3-644465-9		
		10	1.560 (39.62)	A31380-ND	1.11 25.23	4-644465-0		
		11	1.716 (43.59)	A31381-ND	1.23 27.75	4-644465-1		
Replacement IDC Contacts, .156" (3.96mm) Centers — RoHS Compliant								
2	Tin Plated, 18 AWG	—	—	A31672-ND	.30 2.79	640631-3		
	Tin Plated, 20 AWG	—	—	A31673-ND	.30 2.79	640632-3		
	Tin Plated, 22 AWG	—	—	A31674-ND	.30 2.79	640633-3		
	Tin Plated, 24 AWG	—	—	A31675-ND	.30 2.79	640634-3		
	SL-156 Crimp Housings (Contacts Sold Separately) — RoHS Compliant							
3	Without Lock Ramp Without Polarizing Tabs, UL94V-0 White	2	.308 (7.82)	A19970-ND	.29 3.54	640251-2		
		3	.465 (11.81)	A19971-ND	.30 4.24	640251-3		
		4	.620 (15.75)	A19972-ND	.31 5.65	640251-4		
		5	.777 (19.74)	A19973-ND	.31 7.06	640251-5		
		6	.933 (23.70)	A19974-ND	.31 6.12	640251-6		
		7	1.090 (27.69)	A19975-ND	.44 9.88	640251-7		
		8	1.246 (31.65)	A19976-ND	.50 11.29	640251-8		
		9	1.402 (35.61)	A19977-ND	.56 12.71	640251-9		
		10	1.558 (39.57)	A19978-ND	.62 14.11	1-640251-0		
		11	1.715 (43.56)	A19979-ND	.69 15.53	1-640251-1		
		12	1.871 (47.52)	A19980-ND	1.16 26.36	1-640251-2		
		13	2.027 (51.49)	A24128-ND	.81 18.35	1-640251-3		
		14	2.183 (55.45)	A24129-ND	.87 19.76	1-640251-4		
		16	2.496 (63.40)	A24130-ND	1.00 22.59	1-640251-6		
		4	With Lock Ramp Without Polarizing Tabs, UL94V-0 White (Not to be used with Rear Bend Friction Lock header)	2	.308 (7.82)	A19950-ND	.31 2.82	640250-2
				3	.465 (11.81)	A19951-ND	.30 2.60	640250-3
4	.620 (15.75)			A19952-ND	.31 5.65	640250-4		
5	.777 (19.74)			A19953-ND	.30 4.28	640250-5		
6	.933 (23.70)			A19954-ND	.30 5.20	640250-6		
7	1.090 (27.69)			A19955-ND	.31 5.29	640250-7		
8	1.246 (31.65)			A19956-ND	.31 7.00	640250-8		
9	1.402 (35.61)			A19957-ND	.56 12.71	640250-9		
10	1.558 (39.57)			A19958-ND	.62 14.11	1-640250-0		
11	1.715 (43.56)			A19959-ND	.69 15.53	1-640250-1		
12	1.871 (47.52)			A19960-ND	.46 10.41	1-640250-2		
13	2.027 (51.49)			A28761-ND	.81 18.35	1-640250-3		
14	2.183 (55.45)			A24126-ND	.87 19.76	1-640250-4		
16	2.496 (63.40)			A24127-ND	1.00 22.59	1-640250-6		
5	With Lock Ramp With Polarizing Tabs, UL94V-0 White (Not to be used with Rear Bend Friction Lock header)			2	.308 (7.82)	A24111-ND	.29 2.82	770849-2
				3	.465 (11.81)	A24112-ND	.30 4.24	770849-3
		4	.620 (15.75)	A24113-ND	.31 5.65	770849-4		
		5	.777 (19.74)	A24114-ND	.31 4.65	770849-5		
		6	.933 (23.70)	A24115-ND	.37 8.47	770849-6		
		7	1.090 (27.69)	A24116-ND	.44 9.88	770849-7		
		8	1.246 (31.65)	A24117-ND	.50 11.29	770849-8		
		9	1.402 (35.61)	A24118-ND	.42 9.57	770849-9		
		10	1.558 (39.57)	A24119-ND	.62 14.11	1-770849-0		
		11	1.715 (43.56)	A24120-ND	.69 15.53	1-770849-1		
		12	1.871 (47.52)	A24121-ND	.75 16.94	1-770849-2		
		13	2.027 (51.49)	A24122-ND	.81 18.35	1-770849-3		
		14	2.183 (55.45)	A24123-ND	.87 19.76	1-770849-4		
		16	2.496 (63.40)	A24124-ND	1.00 22.59	1-770849-6		

MTA .156" (3.96mm) Receptacles and Post Headers (Cont.)

Fig.	Description	Digi-Key Part No.	Loose Piece Pricing 25	AMP Part No.	Digi-Key Part No.	Cut Strip Pricing 100 500	AMP Part No.
SL-156 Crimp Contacts (24-18 AWG)							
6	RoHS Compliant Brass, Tin Plated, 6.5A	A31396-ND	.28 6.28	3-640706-1	A31395CT-ND A31395TR-ND	5.50 25.22 192.57/7,000	3-640252-1
	RoHS Compliant Brass, Pre-Tin Pltd., 6.5A	A19991-ND	.31 4.91	640706-2	A19991CT-ND A19991TR-ND	4.41 20.20 154.25/7,000	640252-2
7	RoHS Compliant Brass, Tin Plated, 6.5A	A31397-ND	.32 6.31	3-640707-1	A31394CT-ND A31394TR-ND	5.50 25.22 165.06/6,000	3-350980-1
	RoHS Compliant Brass, Pre-Tin Pltd., 6.5A	—	— —	—	A24203CT-ND A24203TR-ND	4.41 20.20 132.21/6,000	350980-2
8	RoHS Compliant Brass, Gold Plated, 6.5A	A24205-ND	.42 9.52	770258-1	A24205CT-ND A24205TR-ND	26.78 122.72 803.25/6,000	350980-3
	Phosphor Bronze, Tin Plated, Hooded, 10A	A19993-ND	.34 6.79	770522-1	—	— —	—
8	RoHS Compliant Phosphor Bronze, Tin Plated, Hooded, 10A	A32533-ND	.32 6.35	3-770522-1	—	— —	—
	RoHS Compliant Phosphor Bronze, Tin Plated, Hooded, 10A	—	— —	—	A31398CT-ND A31398TR-ND	6.05 27.72 166.32/5,500	3-770476-1
8	RoHS Compliant Phosphor Bronze, Gold Plated, Hooded, 10A	A24208-ND	.34 7.61	770522-2	A24208CT-ND A24208TR-ND	17.21 78.90 473.39/5,500	770476-2

Fig.	Description	Circuits	Dim. A Inch (mm)	Digi-Key Part No.	Pricing 1 25	AMP Part No.		
SL-156 Keying Plugs and Pins — RoHS Compliant								
—	Plug, Keying	—	—	A19994-ND	.30 2.24	640254-1		
—	Pin, Keying	—	—	A19995-ND	.29 2.41	640255-1		
Accessories, .156" (3.96mm) Centers — RoHS Compliant								
9	Closed End Strain Relief Covers, White	2	.312 (7.92)	A19740-ND	.43 9.74	643067-2		
		3	.468 (11.89)	A19741-ND	.49 10.93	643067-3		
		4	.624 (15.85)	A19742-ND	1.38 31.11	643067-4		
		5	.780 (19.81)	A19743-ND	1.39 31.22	643067-5		
		6	.936 (23.77)	A19744-ND	1.39 31.33	643067-6		
		7	1.092 (27.74)	A19745-ND	1.40 31.44	643067-7		
		8	1.248 (31.70)	A19746-ND	.51 11.37	643067-8		
		10	1.560 (39.62)	A19748-ND	1.41 31.77	1-643067-0		
		11	1.716 (43.59)	A19749-ND	1.52 34.20	1-643067-1		
		12	1.872 (47.55)	A19750-ND	1.42 31.99	1-643067-2		
10	Closed End Dust Covers, White	13	2.028 (51.51)	A24108-ND	1.36 30.50	1-643067-3		
		17	2.652 (67.36)	A24109-ND	1.45 32.55	1-643067-7		
		2	—	A19760-ND	.30 3.70	640551-2		
		3	—	A19761-ND	.31 4.62	640551-3		
		4	—	A19762-ND	.31 5.53	640551-4		
		5	—	A19763-ND	.31 6.44	640551-5		
		6	—	A19764-ND	.33 7.35	640551-6		
		7	—	A19765-ND	.37 8.27	640551-7		
		8	—	A19766-ND	.41 9.17	640551-8		
		9	—	A19767-ND	.45 10.09	640551-9		
11	Feed-Thru Strain Relief Covers, White	10	—	A19768-ND	.49 11.00	1-640551-0		
		11	—	A19769-ND	.53 11.82	1-640551-1		
		12	—	A19770-ND	.56 12.60	1-640551-2		
		2	.312 (7.92)	A19780-ND	.31 6.88	643071-2		
		3	.468 (11.89)	A19781-ND	.46 10.33	643071-3		
		4	.624 (15.85)	A19782-ND	.61 13.77	643071-4		
		6	.936 (23.77)	A19784-ND	.38 8.44	643071-6		
		7	1.092 (27.74)	A19785-ND	1.46 32.77	643071-7		
		8	1.248 (31.70)	A19786-ND	.93 20.86	643071-8		
		9	1.404 (35.66)	A19787-ND	.97 21.90	643071-9		
12	Feed-Thru Dust Covers, White	10	1.560 (39.62)	A19788-ND	1.52 34.09	1-643071-0		
		11	1.716 (43.59)	A19789-ND	1.42 31.88	1-643071-1		
		12	1.872 (47.55)	A19790-ND	1.52 34.30	1-643071-2		
		15	2.340 (59.44)	A97459-ND	1.54 34.62	1-643071-5		
		17	2.652 (67.36)	A26040-ND	1.45 32.55	1-643071-7		
		3	—	A19801-ND	.31 4.62	640643-3		
		4	—	A19802-ND	.31 5.53	640643-4		
		5	—	A19803-ND	.31 6.44	640643-5		
		6	—	A19804-ND	.30 4.23	640643-6		
		7	—	A19805-ND	.37 8.27	640643-7		
13	Loose Piece, Flush Used with Keyed Headers	8	—	A19806-ND	.31 5.28	640643-8		
		9	—	A19807-ND	.45 10.09	640643-9		
		10	—	A19808-ND	.49 11.00	1-640643-0		
		11	—	A19809-ND	.53 11.82	1-640643-1		
		12	—	A19810-ND	.56 12.60	1-640643-2		
		Keying Plugs — RoHS Compliant						
		13	Loose Piece, Flush Used with Keyed Headers	—	—	A19845-ND	.30 3.92	640629-1
		14	On Carrier Strip, Flush 10 per Strip	—	—	A19840-ND	1.74 39.16	641623-1
		15	Long Nose Used with Staked Post	—	—	A19850-ND	.50 6.11	640630-1
		Panel Mount End Caps — RoHS Compliant						
16	Black Nylon	2	—	A19860-ND	.60 13.49	641533-1		
17	Black Nylon	3-24	—	A19855-ND	.83 18.67	641440-1		

Fig.	Description	Circuits	Dim. A Inch (mm)	Digi-Key Part No.	Pricing 1 25	AMP Part No.
Flat Post Headers, .156" (3.96mm) Centers — RoHS Compliant						
18	Straight Post .045" (1.14mm) Square, Standard UL94V-0, Tin Plated, .125" (3.18mm) Solder tail, White	2	.312 (7.92)	A1961-ND	.30 4.79	640383-2
		3	.468 (11.89)	A19870-ND	.61 13.83	640383-3
		4	.624 (15.85)	A1962-ND	.43 9.59	640383-4
		5	.780 (19.81)	A19871-ND	.53 11.98	640383-5
		6	.936 (23.77)	A1963-ND	.58 13.07	640383-6
		7	1.092 (27.74)	A19872-ND	.68 15.25	640383-7
		8	1.248 (31.70)	A1964-ND	.77 17.43	640383-8
		9	1.404 (35.66)	A19873-ND	.87 19.61	640383-9
		10	1.560 (39.62)	A1965-ND	.97 21.79	1-640383-0
		11	1.716 (43.59)	A19874-ND	.54 12.13	1-640383-1
		12	1.872 (47.55)	A19875-ND	.59 13.23	1-640383-2
		17	2.652 (67.36)	A26167-ND	2.06 46.30	1-640383-7
18	Straight Post .045" (1.14mm) Round, Standard UL94V-0, Tin Plated, .125" (3.18mm) Solder tail, White	2	.312 (7.92)	A26168-ND	.41 9.22	640384-2
		3	.468 (11.89)	A26169-ND	.32 7.19	640384-3
		4	.624 (15.85)	A24152-ND	.82 18.44	640384-4
		5	.780 (19.81)	A26170-ND	.53 11.98	640384-5
		6	.936 (23.77)	A26171-ND	1.12 25.15	640384-6
		7	1.092 (27.74)	A26172-ND	.68 15.25	640384-7
		8	1.248 (31.70)	A24153-ND	1.49 33.53	640384-8
		9	1.404 (35.66)	A26173-ND	1.68 37.72	640384-9
		10	1.560 (39.62)	A24154-ND	1.86 41.91	1-640384-0
		11	1.716 (43.59)	A26174-ND	1.26 28.44	1-640384-2
		12	1.872 (47.55)	A26175-ND	1.43 32.14	1-640384-3
		19	Right Angle Post .045" (1.14mm) Square, Standard UL94V-0, Tin Plated, .125" (3.18mm) Solder tail, White	2	.312 (7.92)	A1966-ND
3	.468 (11.89)			A19876-ND	.31 3.02	640385-3
4	.624 (15.85)			A1967-ND	.30 4.31	640385-4
5	.780 (19.81)			A19877-ND	.31 5.61	640385-5
6	.936 (23.77)			A1968-ND	.31 6.47	640385-6
7	1.092 (27.74)			A19878-ND	.31 6.91	640385-7
8	1.248 (31.70)			A1969-ND	.40 8.97	640385-8
9	1.404 (35.66)			A19879-ND	1.16 26.14	640385-9
10	1.560 (39.62)			A1970-ND	.45 10.20	1-640385-0
11	1.716 (43.59)			A19880-ND	1.43 32.14	1-640385-1
12	1.872 (47.55)			A19881-ND	.54 12.12	1-640385-2
17	2.652 (67.36)			A26167-ND	2.06 46.30	1-640383-7
19	Right Angle Post .045" (1.14mm) Square, Standard UL94V-0, Tin Plated, .175" (4.45mm) Solder tail, White	2	.312 (7.92)	A24155-ND	.30 2.41	644751-2
		3	.468 (11.89)	A24156-ND	.13 3.02	644751-3
		4	.624 (15.85)	A24157-ND	.19 4.31	644751-4
		5	.780 (19.81)	A24158-ND	.25 5.61	644751-5
		6	.936 (23.77)	A24159-ND	.29 6.47	644751-6
		7	1.092 (27.74)	A24160-ND	.31 6.91	644751-7
		8	1.248 (31.70)	A24161-ND	.40 8.97	644751-8
		10	1.560 (39.62)	A24162-ND	.45 10.20	1-644751-0
		11	1.716 (43.59)	A24163-ND	.54 12.12	1-644751-1
		12	1.872 (47.55)	A24163-ND	.54 12.12	1-644751-2
		17	2.652 (67.36)	A26167-ND	2.06 46.30	1-640383-7
		Straight Post Headers, .156" (3.96mm) Centers, Friction Lock Header				
20	RoHS Compliant Square Post .045" (1.14mm) Square, Standard UL94V-0, Tin Plated, .125" (3.18mm) Solder tail, White	2	.312 (7.92)	A1971-ND	.30 2.41	640445-2
		3	.468 (11.89)	A19890-ND	.30 3.02	640445-3
		4	.624 (15.85)	A1972-ND	.30 4.31	640445-4
		5	.780 (19.81)	A19891-ND	.31 5.61	640445-5
		6	.936 (23.77)	A1973-ND	.31 6.47	640445-6
		7	1.092 (27.74)	A19892-ND	.31 6.91	640445-7
		8	1.248 (31.70)	A1974-ND	.40 8.97	640445-8
		9	1.404 (35.66)	A19893-ND	1.16 26.14	640445-9
		10	1.560 (39.62)	A1975-ND	.45 10.20	1-640445-0
		11	1.716 (43.59)	A19894-ND	1.42 31.96	1-640445-1
		12	1.872 (47.55)	A19895-ND	.54 12.12	1-640445-2
		17	2.652 (67.36)	A26167-ND	2.06 46.30	1-640383-7
20	RoHS Compliant Square Post .045" (1.14mm) Square, Standard UL94V-0, Tin Plated, .175" (4.45mm) Solder tail, White	2	.312 (7.92)	A24164-ND	.13 2.95	644752-2
		3	.468 (11.89)	A24165-ND	.13 3.02	644752-3
		4	.624 (15.85)	A24166-ND	.19 4.31	644752-4
		5	.780 (19.81)	A24167-ND	.25 5.61	644752-5
		6	.936 (23.77)	A24168-ND	.29 6.47	644752-6
		7	1.092 (27.74)	A24169-ND	.31 6.91	644752-7
		8	1.248 (31.70)	A24170-ND	.40 8.97	644752-8
		9	1.404 (35.66)	A26175-ND	1.16 26.14	644752-9
		10	1.560 (39.62)	A24171-ND	.45 10.20	1-644752-0
		11	1.716 (43.59)	A24172-ND	.54 12.12	1-644752-1
		12	1.872 (47.55)	A24172-ND	.54 12.12	1-644752-2
		17	2.652 (67.36)	A26167-ND	2.06 46.30	1-640383-7
20	Square Post .045" (1.14mm) Square, Standard UL94V-0, 30p Gold Plated, .125" (3.18mm) Solder tail, White	8	1.248 (31.70)	A26181-ND	4.52 101.75	641208-8
		2	.312 (7.92)	A31676-ND	1.27 28.68	3-641208-2
		3	.468 (11.89)	A31677-ND	1.43 32.24	3-641208-3
20	RoHS Compliant Square Post .045" (1.14mm) Square, Standard UL94V-0, 30p Gold Plated, .125" (3.18mm) Solder tail, White	4	.624 (15.85)	A31678-ND	1.87 42.02	3-641208-4
		5	.780 (19.81)	A31679-ND	2.39 53.74	3-641208-5
		6	.936 (23.77)	A31680-ND	2.91 65.47	3-641208-6
		7	1.092 (27.74)	A31681-ND	3.30 74.26	3-641208-7
		8	1.248 (31.70)	A31682-ND	3.82 85.99	3-641208-8
		9	1.404 (35.66)	A31683-ND	4.30 96.74	3-641208-9
		10	1.560 (39.62)	A31684-ND	4.73 106.51	4-641208-0
		11	1.716 (43.59)	A31685-ND	5.21 117.26	4-641208-1
		12	1.872 (47.55)	A31686-ND	5.69 128.01	4-641208-2
		17	2.652 (67.36)	A31687-ND	8.21 184.68	4-641208-7