

MOLEX Pin and Socket Connectors and Tools

(.084" - MLX Series)

molex
one company a world of innovation

PLUGS

Series 42021

Features:

- Intermediate, interchangeable, and intermountable with industry-standard versions
- Positive Locks
- Fully isolated contacts
- Circuit ID grooves to reduce assembly errors
- Anti-stress positioning tabs to reduce breakage
- Mates with: Series 42022 Receptacles and Series 42002 Headers
- Material, plug housing: Nylon, UL94V-2, White
- Operating Temperature: -55° to +105°C
- Voltage: 600V*
- UL File No: E29179
- CSA File No: LR19980



For quantities of 1000 and up, call for quote.

MOUSER STOCK NO.	Molex Part No.	Fig.	No. of Circuits	Amps/ Circuit (Max.):*	Dimensions: in.		Price Each			
					A	B	1	10	100	500
538-50-84-1020	50-84-1020	A	2	13.5	0.580	0.550	.24	.18	.13	.11
538-50-84-1030	50-84-1030	A	3	13.5	0.580	0.800	.26	.20	.16	.13
538-50-84-1040	50-84-1040	A	4	13.5	0.580	1.050	.32	.24	.18	.15
538-50-84-1060	50-84-1060	A	6	11	1.080	0.550	.34	.26	.21	.17
538-50-84-1090	50-84-1090	A	9	11	1.080	0.800	.36	.28	.24	.20
538-50-84-1120	50-84-1120	A	12	11	1.080	1.050	.59	.48	.32	.29
538-50-84-1150	50-84-1150	A	15	11	1.080	1.30	.56	.44	.38	.34

* Ratings are per circuit, based on fully loaded housings

RECEPTACLES

Series 42022

Features:

- Intermediate, interchangeable and intermountable with industry-standard versions
- Positive locks
- Fully isolated contacts
- Circuit ID grooves to reduce assemble errors
- Anti-stress positioning tabs to reduce breakage
- Mates with: Series 42021
- Material, receptacle housing: Nylon, UL94V-2, White
- Operating Temperature: -55° to +105° C
- Voltage: 600V*
- UL File No: E29179
- CSA File No: LR19980



For quantities of 1000 and up, call for quote.

MOUSER STOCK NO.	Molex Part No.	Fig.	No. of Circuits	Amps/ Circuit (Max.):*	Dimensions: in.								Price Each			
					A	B	C**	D	E	F	G	H	1	10	100	500
538-50-84-2020	50-84-2020	B	2	13.5	.62	.300	.340	.095	.250	.53	.565	.550	.25	.21	.15	.13
538-50-84-2030	50-84-2030	B	3	13.5	.62	.300	.340	.095	.250	.53	.815	.800	.30	.22	.18	.15
538-50-84-2040	50-84-2040	B	4	13.5	.62	.300	.340	.095	.250	.53	1.065	1.050	.35	.27	.20	.16
538-50-84-2060	50-84-2060	B	6	11	1.12	.800	.340	.275	.250	1.03	.565	.550	.40	.34	.23	.18
538-50-84-2090	50-84-2090	B	9	11	1.12	.800	.480	.275	.250	1.03	.815	.800	.51	.39	.30	.24
538-50-84-2120	50-84-2120	B	12	11	1.12	.800	.480	.275	.350	1.03	1.065	1.050	.63	.53	.44	.37
538-50-84-2150	50-84-2150	B	15	11	1.12	.800	.480	.275	.350	1.03	1.315	1.300	.86	.77	.52	.39

* Ratings are per circuit, based on fully loaded housings

** Cap housing should be installed into panel in the same direction as the panel cutout is punched

VERTICAL HEADERS

Features:

- Material: Header Housing: UL94V-2, White
Header Contact: Phosphor Bronze
Plating: Tin
- Operating Temperature: -55° to +105° C
- Voltage: 600V *
- Amperes*: 2, 3, 4 circuits all 13.5
- Amperes*: 6, 9, 12, 15 circuits all 11.0

For quantities of 1000 and up, call for quote.

MOUSER STOCK NO.	Molex Part No.	Fig.	No. of Circuits	Description	Dimensions: in.		Price Each			
					A	B	1	10	500	1000
538-10-84-4020	10-84-4020	C	2	Male	0.300	0.550	.46	.40	.27	.21
538-10-84-4022	10-84-4022	C	2	Female	0.300	0.550	.38	.29	.24	.20
538-10-84-4030	10-84-4030	C	3	Male	0.300	0.800	.59	.48	.35	.28
538-10-84-4032	10-84-4032	C	3	Female	0.300	0.800	.49	.35	.28	.25
538-10-84-4040	10-84-4040	C	4	Male	0.300	1.050	.76	.57	.44	.35
538-10-84-4042	10-84-4042	C	4	Female	0.300	1.050	.59	.51	.43	.39
538-10-84-4060	10-84-4060	C	6	Male	0.800	0.550	.80	.77	.64	.51
538-10-84-4062	10-84-4062	C	6	Female	0.800	0.550	.85	.76	.68	.50
538-10-84-4090	10-84-4090	C	9	Male	0.800	0.800	.89	.71	.67	.58
538-10-84-4092	10-84-4092	C	9	Female	0.800	0.800	1.21	1.12	.86	.73
538-10-84-4120	10-84-4120	C	12	Male	0.800	1.050	1.38	1.14	.94	.81
538-10-84-4122	10-84-4122	C	12	Female	0.800	1.050	1.45	1.31	1.18	1.06
538-10-84-4150	10-84-4150	C	15	Male	0.800	1.300	1.45	1.29	1.13	1.04
538-10-84-4152	10-84-4152	C	15	Female	0.800	1.300	1.52	1.29	1.16	1.04

* Ratings are per circuit, based on fully loaded housings

CONTACTS

Features:

- Plating: Tin
- Insulation Diameter: 10-12 AWG: 3.30 (.130) min., 5.08 (.200) max.
- Insulation Diameter: 14-20 AWG: 1.52 (.060) min., 3.30 (.130) max.

For quantities of 2000 and up, call for quote.

MOUSER STOCK NO.	Molex Part No.	Fig.	Wire Size (AWG)	Description	Type	Price Each			
						1	100	500	1000
538-36664-0002	36664-0002	D	10-12	Female	Standard Brass .012"	.12	.11	.10	.09
538-02-08-1002	02-08-1002	D	14-20	Female	Standard Brass .012"	.08	.05	.042	.035
538-02-08-1004	02-08-1004	D	14-20	Female	Phosphor Bronze .012"	.10	.09	.08	.07
538-36663-0002	36663-0002	E	10-12	Male	Standard Brass .012"	.12	.11	.10	.09
538-02-08-2004	02-08-2004	E	14-20	Male	Standard Brass .012"	.08	.05	.04	.03
538-02-08-2006	02-08-2006	E	14-20	Male	Phosphor Bronze .012"	.10	.09	.08	.07

TOOLS

For quantities of 5 and up, call for quote.

MOUSER STOCK NO.	Molex Part No.	Wire Size (AWG)	Description	Price Each
538-11-01-0168	11-01-0168	14-20	Extraction Tool	62.35
538-63811-4800	63811-4800	10-12	Hand Tool	295.00
538-63811-6800	63811-6800	14-20	Hand Tool	243.27

© Copyright 2008 Mouser Electronics

© Copyright 2008 Mouser Electronics


www.mouser.com/molex



a ti company
Mouser Catalog Download

(800) 346-6873

1397

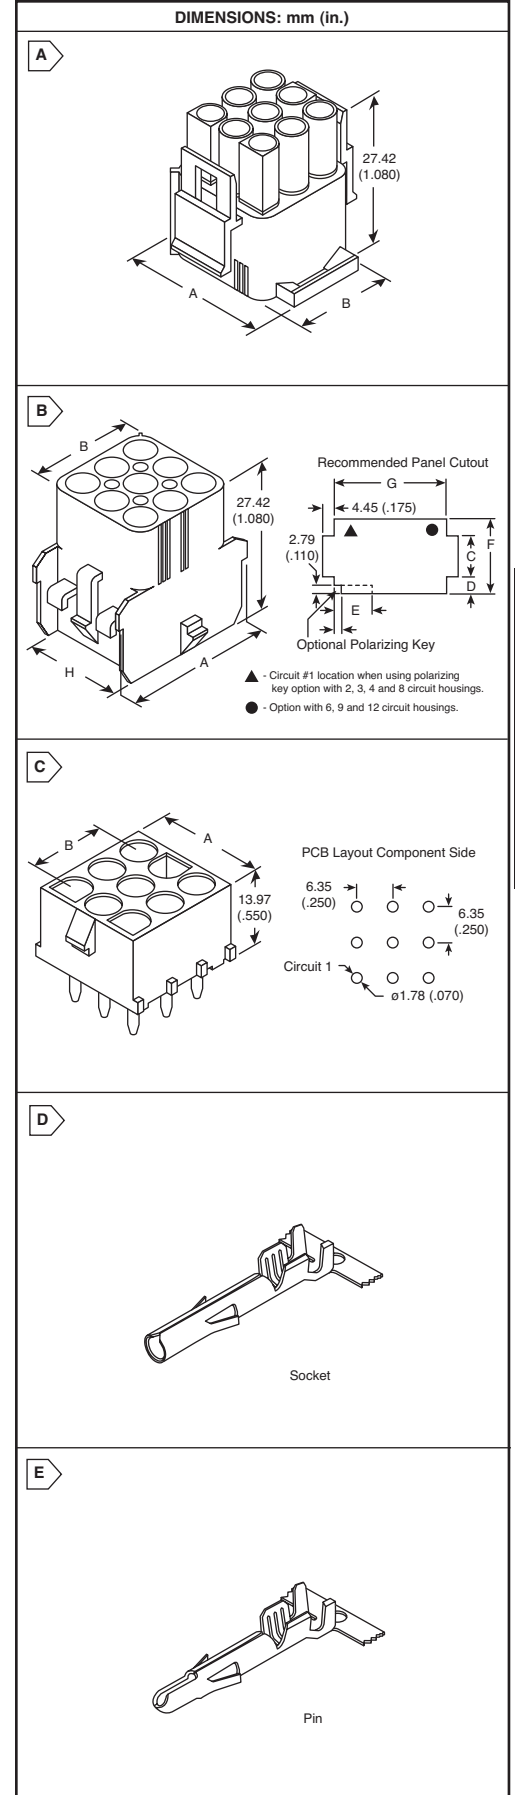

Rectangular Connectors
Molex