


MOLEX 2.54mm / .100" SL™ Connectors

molex
one company » a world of innovation

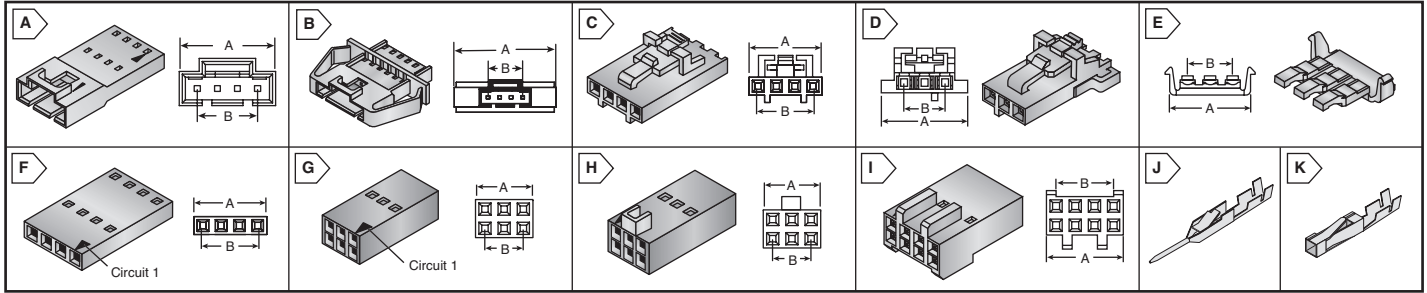

2.54mm (.100") SL™ WIRE TO WIRE CRIMP HOUSINGS

Features:

- Housing: Black glass-filled polyester, UL94V-0
- Mounting ears for insertion into .030" to .090" thick panels
- Locking crown secures positive latch to connector
- Operating Temperature: -40°C to +105°C
- RoHS compliant per Molex documentation



LR19980 E29179
Series: 70107
Polarized

RoHS Compliant

For quantities of 1000 and up, call for quote.

MOUSER STOCK NO.	Molex Part No.	Fig.	No. of Circuits	Dimensions: in.		Price Each			
				A	B	1	10	100	500
Single Row, No Mounting Ears									
538-70107-0001	70107-0001	A	2	.280	.100	.99	.71	.55	.47
538-70107-0002	70107-0002	A	3	.380	.200	.83	.72	.60	.48
538-70107-0003	70107-0003	A	4	.480	.300	.91	.74	.61	.49
538-70107-0004	70107-0004	A	5	.580	.400	.98	.81	.65	.56
538-70107-0005	70107-0005	A	6	.680	.500	1.03	.96	.82	.69
538-70107-0006	70107-0006	A	7	.780	.600	1.39	1.10	.87	.72
538-70107-0007	70107-0007	A	8	.880	.700	1.56	1.03	.94	.78
538-70107-0008	70107-0008	A	9	.980	.800	1.45	1.15	.91	.75
538-70107-0011	70107-0011	A	12	1.280	1.100	1.50	1.20	.90	.70
538-70107-0013	70107-0013	A	14	1.480	1.300	1.56	1.36	1.06	.92
Single Row, Mounting Ears									
538-70107-0036	70107-0036	B	2	.650	.100	.96	.88	.79	.67
538-70107-0037	70107-0037	B	3	.750	.200	.84	.75	.71	.64
538-70107-0038	70107-0038	B	4	.850	.300	.99	.84	.76	.70
538-70107-0039	70107-0039	B	5	.950	.400	.89	.75	.69	.62
538-70107-0040	70107-0040	B	6	1.050	.500	1.68	1.51	1.36	1.23

2.54mm (.100") SL™ CRIMP HOUSINGS

- Housing: Black glass-filled polyester, UL 94V-0
- TPA: White glass-filled polyester, UL94V-0
- Positive Latch: Secures connectors to locking crown of mating connector
- TPA Piece: Eliminates terminal blackout when TPA is locked into place
- Non-polarized: End to end and side to side stackable



LR19980 E29179 RoHS Compliant
Operating Temperature: -40°C to 105°C
Series 70066 and 73838
RoHS compliant per Molex documentation

For quantities of 1000 and up, call for quote.

MOUSER STOCK NO.	Molex Part No.	Fig.	No. of Circuits	Dimensions: in.		Price Each			
				A	B	1	10	100	500
Single Row, Positive Latch									
538-50-57-9402	50-57-9402	C	2	.199	.100	.47	.38	.28	.22
538-50-57-9403	50-57-9403	C	3	.299	.200	.31	.24	.20	.16
538-50-57-9404	50-57-9404	C	4	.399	.300	.43	.34	.29	.23
538-50-57-9405	50-57-9405	C	5	.499	.400	.56	.44	.37	.29
538-50-57-9406	50-57-9406	C	6	.599	.500	.63	.52	.43	.33
538-50-57-9407	50-57-9407	C	7	.699	.600	.74	.66	.45	.35
538-50-57-9408	50-57-9408	C	8	.799	.700	.80	.64	.53	.42
538-50-57-9409	50-57-9409	C	9	.899	.800	.81	.64	.54	.41
538-50-57-9410	50-57-9410	C	10	.999	.900	.82	.65	.54	.43
538-50-57-9411	50-57-9411	C	11	1.099	1.000	.87	.69	.57	.46
538-50-57-9412	50-57-9412	C	12	1.199	1.100	.75	.60	.50	.40
538-50-57-9414	50-57-9414	C	14	1.399	1.300	.83	.71	.62	.56
538-50-57-9416	50-57-9416	C	16	1.599	1.500	.87	.78	.67	.59
Single Row TPA, Positive Latch									
538-50-57-9702	50-57-9702	D	2	.197	.100	.35	.31	.29	.26
538-50-57-9703	50-57-9703	D	3	.297	.200	.48	.41	.36	.32
538-50-57-9704	50-57-9704	D	4	.397	.300	.45	.42	.39	.37
538-50-57-9705	50-57-9705	D	5	.497	.400	.71	.64	.58	.52
538-50-57-9706	50-57-9706	D	6	.597	.500	.56	.47	.42	.38
538-50-57-9707	50-57-9707	D	7	.697	.600	.56	.48	.44	.41
538-50-57-9708	50-57-9708	D	8	.797	.700	.59	.51	.45	.42
TPA (Terminal Position Assurance) Piece									
538-73838-0002	73838-0002	E	2	.259	.100	.17	.15	.14	.13
538-73838-0003	73838-0003	E	3	.359	.200	.19	.18	.17	.16
538-73838-0004	73838-0004	E	4	.459	.300	.21	.20	.19	.18
538-73838-0005	73838-0005	E	5	.559	.400	.22	.21	.20	.19
538-73838-0006	73838-0006	E	6	.659	.500	.23	.22	.21	.20
538-73838-0007	73838-0007	E	7	.759	.600	.26	.24	.22	.21
538-73838-0008	73838-0008	E	8	.859	.700	.28	.27	.26	.25
Single Row, Non-Polarized									
538-50-57-9002	50-57-9002	F	2	.199	.100	.53	.47	.31	.24
538-50-57-9003	50-57-9003	F	3	.299	.200	.67	.58	.38	.30
538-50-57-9004	50-57-9004	F	4	.399	.300	.69	.61	.40	.32
538-50-57-9005	50-57-9005	F	5	.499	.400	.73	.63	.42	.33
538-50-57-9006	50-57-9006	F	6	.599	.500	.79	.68	.45	.36
538-50-57-9007	50-57-9007	F	7	.699	.600	.85	.72	.49	.41
538-50-57-9008	50-57-9008	F	8	.799	.700	.83	.75	.48	.39
538-50-57-9009	50-57-9009	F	9	.899	.800	.90	.79	.52	.46
538-50-57-9010	50-57-9010	F	10	.999	.900	.96	.71	.61	.49

2.54mm (.100") SL™ CRIMP HOUSINGS (Cont.)

Features:

- Housing: Black glass-filled polyester, UL94V-0
- Non-Polarized: End to end and side to side stackable
- Polarized: Mates with dual low profile shrouded headers
- Operating Temperature: -40°C to +105°C
- Series 70450
- RoHS compliant per Molex documentation



LR19980 E29179 RoHS Compliant

For quantities of 1000 and up, call for quote.

MOUSER STOCK NO.	Molex Part No.	Fig.	No. of Circuits	Dimensions: in.		Price Each			
				A	B	1	10	100	500
Dual Row, Non-Polarized									
538-22-55-2041	22-55-2041	G	4	.199	.100	1.69	1.45	1.20	.99
538-22-55-2061	22-55-2061	G	6	.299	.200	1.62	1.45	.99	.89
538-22-55-2081	22-55-2081	G	8	.399	.300	2.00	1.80	1.20	.92
538-22-55-2101	22-55-2101	G	10	.499	.400	2.13	1.88	1.26	.98
538-22-55-2121	22-55-2121	G	12	.599	.500	2.22	1.96	1.63	1.24
538-22-55-2141	22-55-2141	G	14	.699	.600	2.69	2.40	1.59	1.29
538-22-55-2161	22-55-2161	G	16	.699	.600	2.65	2.09	1.35	1.15
538-22-55-2181	22-55-2181	G	18	.899	.800	2.00	1.65	1.49	1.40
538-22-55-2201	22-55-2201	G	20	.999	.900	2.89	2.39	1.65	1.27
538-22-55-2261	22-55-2261	G	26	1.299	1.200	2.77	2.45	2.09	1.82
538-22-55-2301	22-55-2301	G	30	1.499	1.400	2.29	2.11	1.93	1.69
538-22-55-2401	22-55-2401	G	40	1.999	1.900	3.69	3.34	2.14	1.79
538-22-55-2501	22-55-2501	G	50	2.499	2.400	3.87	3.41	2.73	2.22
Dual Row, Polarized, Version B									
538-22-55-2062	22-55-2062	H	6	.299	.200	1.88	1.69	1.52	1.37
538-22-55-2082	22-55-2082	H	8	.399	.300	1.33	1.24	1.08	1.03
538-22-55-2102	22-55-2102	H	10	.499	.400	1.08	.91	.79	.76
538-22-55-2122	22-55-2122	H	12	.599	.500	1.22	1.03	.87	.792
538-22-55-2142	22-55-2142	H	14	.699	.600	1.79	1.44	1.27	.99
538-22-55-2162	22-55-2162	H	16	.799	.700	2.01	1.63	1.43	1.11
Dual Row, Polarized, Version F									
538-22-56-6067	22-56-6067	I	6	.299	.200	2.45	2.10	1.58	1.30
538-22-56-6087	22-56-6087	I	8	.399	.300	1.35	1.20	.95	.84
538-22-56-6107	22-56-6107	I	10	.499	.400	2.49	2.13	1.60	1.31
538-22-56-6127B	22-56-6127	I	12	.599	.500	1.37	1.17	1.06	.99
538-22-56-6167	22-56-6167	I	16	.799	.700	1.57	1.29	1.17	1.04
538-22-56-6187	22-56-6187	I	18	.899	.800	1.54	1.39	1.25	1.08
538-22-56-6207	22-56-6207	I	20	.999	.900	3.15	2.70	2.03	1.67
538-22-56-6307	22-56-6307	I	30	1.490	1.400	3.68	3.15	2.36	1.94

CRIMP TERMINALS

- Dual tab strain relief
- Locking tang secures terminal in housing
- Phosphor bronze
- Voltage: 250V
- Current: 3.0A

- Operating Temperature: -40°C to +105°C
- Male use with series 70107
- Female use with series 70066 and 70450
- RoHS compliant per Molex documentation



RoHS Compliant

* High Force


For quantities of 2000 and up, call for quote.

MOUSER STOCK NO.	Molex Part No.	Fig.	Type	AWG	Plating	Price Each			
						1	100	500	1000
538-16-02-0117	16-02-0117	J	Male	22-24	30µ" Gold	.21	.15	.12	.10
538-16-02-0110	16-02-0110	J	Male	24-30	30µ" Gold	.25	.15	.12	.10
538-16-02-0115	16-02-0115	J	Male	22-24	15µ" Gold	.15	.12	.096	.079
538-16-02-0109	16-02-0109	J	Male	24-30	15µ" Gold	.15	.12	.096	.079
538-16-02-0114	16-02-0114	J	Male	22-24	150µ" Tin	.10	.07	.056	.047
538-16-02-0108	16-02-0108	J	Male	24-30	150µ" Tin	.10	.08	.056	.047
538-16-02-0104	16-02-0104	K	Female	22-24	30µ" Gold	.15	.12	.10	.08
538-16-02-0098	16-02-0098	K	Female	24-30	30µ" Gold	.16	.13	.12	.11
538-16-02-0103	16-02-0103	K	Female	22-24	15µ" Gold	.13	.11	.08	.07
538-16-02-0097	16-02-0097	K	Female	24-30	15µ" Gold	.13	.11	.08	.072
538-16-02-0102	16-02-0102	K	Female	22-24	150µ" Tin	.08	.07	.056	.047
538-16-02-0096	16-02-0096	K	Female	24-30	150µ" Tin	.08	.07	.055	.047
538-16-02-1125	16-02-1125	K	*Female	22-24	15µ" Gold	.22	.16	.13	.11
538-16-02-1109	16-02-1109	K	*Female	24-30	15µ" Gold	.21	.16	.13	.11
538-16-02-1114	16-02-1114	K	*Female	22-24	150µ" Tin	.13	.10	.08	.067
538-16-02-1116	16-02-1116	K	*Female	24-30	150µ" Tin	.12	.10	.08	.067

MOLEX 2.54mm (.100") SL™ Shrouded PCB Headers

molex
one company • a world of innovation

RoHS Compliant This product is RoHS compliant.

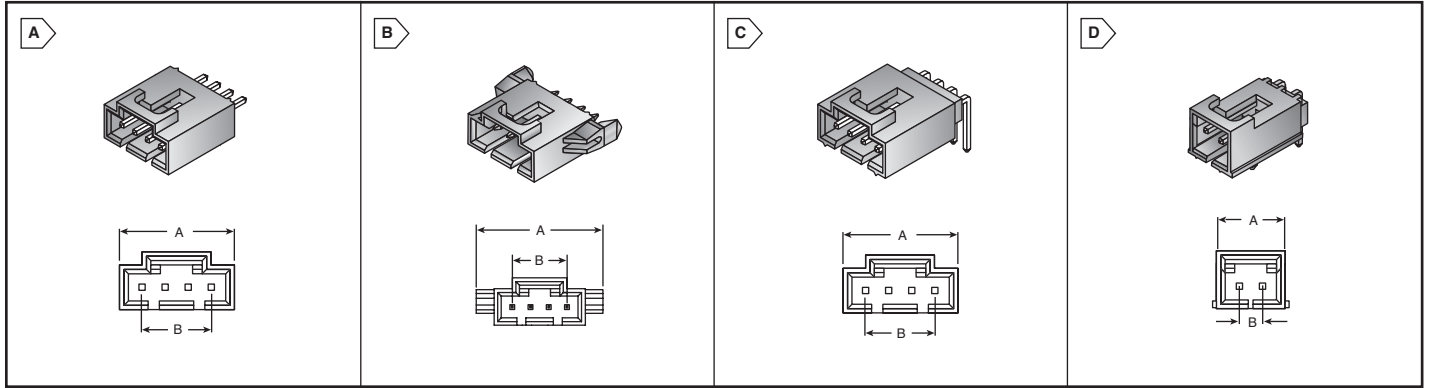

SINGLE ROW, VERTICAL

Specifications:

- Housing: Black glass filled PCT, UL 94V-0
- Contact: Phosphor bronze, .025" square
- Operating Temperature: -40 to +105°C
- Voltage: 250V
- Current: 3.0A
- .120" Pocket



LR19980

E29179

RoHS Compliant

PCB Headers

Features:

- Locking crown secures positive latch to header
- Standoffs minimize flux retention
- Polarization slots guide front ribs of mating connector to prevent pin damage
- Mates with series 70066
- Surface mount compatible
- Wire to board
- RoHS Compliant per Molex documentation

For quantities of 1000 and up, call for quote.

MOUSER STOCK NO.	Molex Part No.	Fig.	No. of Cir.	Contact Plating	Dim. (In.)		Price Each			
					A	B	1	10	100	500
538-70543-0036	70543-0036	A	2	Tin	.29	.10	.82	.68	.54	.47
538-70543-0001	70543-0001	A	2	15µ" Gold	.29	.10	.84	.70	.56	.44
538-70543-0106	70543-0106	A	2	30µ" Gold	.29	.10	.92	.77	.62	.49
538-70543-0037	70543-0037	A	3	Tin	.40	.20	.89	.71	.55	.48
538-70543-0002	70543-0002	A	3	15µ" Gold	.40	.20	.91	.71	.59	.51
538-70543-0107	70543-0107	A	3	30µ" Gold	.40	.20	1.22	.99	.82	.66
538-70543-0038	70543-0038	A	4	Tin	.50	.30	.98	.82	.65	.51
538-70543-0003	70543-0003	A	4	15µ" Gold	.50	.30	1.00	.84	.69	.58
538-70543-0108	70543-0108	A	4	30µ" Gold	.50	.30	1.22	1.02	.93	.77
538-70543-0039	70543-0039	A	5	Tin	.60	.40	1.06	.88	.71	.59
538-70543-0004	70543-0004	A	5	15µ" Gold	.60	.40	1.15	.95	.78	.59
538-70543-0109	70543-0109	A	5	30µ" Gold	.60	.40	1.31	1.09	.88	.73
538-70543-0040	70543-0040	A	6	Tin	.70	.50	.98	.81	.66	.52
538-70543-0005	70543-0005	A	6	15µ" Gold	.70	.50	1.17	.98	.79	.62
538-70543-0110	70543-0110	A	6	30µ" Gold	.70	.50	1.39	1.19	.96	.76
538-70543-0006	70543-0006	A	7	15µ" Gold	.80	.60	1.25	1.10	.89	.68
538-70543-0042	70543-0042	A	8	Tin	.90	.70	.90	.78	.63	.60
538-70543-0007	70543-0007	A	8	15µ" Gold	.90	.70	1.48	1.25	.99	.86
538-70543-0112	70543-0112	A	8	30µ" Gold	.90	.70	1.36	1.14	.92	.73
538-70543-0008	70543-0008	A	9	15µ" Gold	1.00	.80	1.47	1.23	.99	.78
538-70543-0044	70543-0044	A	10	Tin	1.10	.90	1.02	.92	.86	.73
538-70543-0009	70543-0009	A	10	15µ" Gold	1.10	.90	1.56	1.40	1.26	1.05
538-70543-0010	70543-0010	A	11	15µ" Gold	1.20	1.00	1.69	1.42	1.14	1.02
538-70543-0011	70543-0011	A	12	15µ" Gold	1.30	1.10	2.04	1.62	1.35	1.12

Headers with Plastic Tri-Peg

Features:

- Locking crown secures positive latch to header
- Standoffs minimize flux retention
- Polarization slots guide front ribs of mating connector to prevent pin damage
- Mates with series 70066
- Surface mount compatible
- Wire to board
- RoHS Compliant per Molex documentation



RoHS Compliant

For quantities of 1000 and up, call for quote.

MOUSER STOCK NO.	Molex Part No.	Fig.	No. of Cir.	Contact Plating	Dim. (In.)		Price Each			
					A	B	1	10	100	500
538-70545-0001	70545-0001	B	2	Tin	.488	.10	.57	.52	.48	.44
538-70545-0036	70545-0036	B	2	15µ" Gold	.488	.10	.51	.44	.38	.34
538-70545-0071	70545-0071	B	2	30µ" Gold	.488	.10	.65	.55	.47	.37
538-70545-0002	70545-0002	B	3	Tin	.588	.20	.98	.82	.68	.54
538-70545-0037	70545-0037	B	3	15µ" Gold	.588	.20	.68	.59	.51	.46
538-70545-0072	70545-0072	B	3	30µ" Gold	.588	.20	.74	.67	.59	.57
538-70545-0003	70545-0003	B	4	Tin	.69	.30	.66	.54	.49	.44
538-70545-0038	70545-0038	B	4	15µ" Gold	.688	.30	.74	.65	.52	.47
538-70545-0073	70545-0073	B	4	30µ" Gold	.688	.30	.75	.67	.60	.57
538-70545-0039	70545-0039	B	5	15µ" Gold	.788	.40	.65	.57	.52	.48
538-70545-0074	70545-0074	B	5	30µ" Gold	.79	.40	.98	.93	.87	.75
538-70545-0005	70545-0005	B	6	Tin	.89	.50	.88	.80	.69	.54
538-70545-0040	70545-0040	B	6	15µ" Gold	.888	.50	.71	.65	.59	.52
538-70545-0075	70545-0075	B	6	30µ" Gold	.888	.50	1.24	1.18	1.10	1.03
538-70545-0041	70545-0041	B	7	15µ" Gold	.988	.60	.85	.71	.65	.61
538-70545-0042	70545-0042	B	8	15µ" Gold	1.088	.70	1.14	1.06	.99	.89
538-70545-0077	70545-0077	B	8	30µ" Gold	1.09	.70	1.15	1.02	.94	.89
538-70545-0043	70545-0043	B	9	15µ" Gold	1.19	.80	1.15	.99	.86	.79
538-70545-0044	70545-0044	B	10	15µ" Gold	1.288	.90	1.12	.93	.75	.71
538-70545-0079	70545-0079	B	10	30µ" Gold	1.288	.90	1.65	1.58	1.46	1.31
538-70545-0046	70545-0046	B	12	15µ" Gold	1.488	1.10	1.10	.92	.84	.79

© Copyright 2008 Mouser Electronics

www.mouser.com/molex



a tti company

(800) 346-6873

© Copyright 2008 Mouser Electronics

1399



RoHS Compliant

SINGLE ROW, RIGHT ANGLE, LOW PROFILE

Specifications:

- Housing: Black glass filled PCT, UL 94V-0
- Contact: Phosphor bronze, .025" square
- Operating Temperature: -40 to +105°C
- Voltage: 250V
- Current: 3.0A
- .120" Pocket



LR19980

E29179

RoHS Compliant

PCB Headers

Features:

- Locking crown secures positive latch to header
- Polarization slots guide front ribs of mating connector to prevent pin damage
- Standoffs minimize flux retention
- Surface mount compatible
- Housing: Black glass filled PCT, UL 94V-0
- Contact: Phosphor bronze, .025" square
- Mates with series 70066
- Wire to board
- RoHS Compliant per Molex documentation

For quantities of 1000 and up, call for quote.

MOUSER STOCK NO.	Molex Part No.	Fig.	No. of Cir.	Contact Plating	Dim. (In.)		Price Each			
					A	B	1	10	100	500
538-70553-0036	70553-0036	C	2	Tin	.29	.10	.79	.66	.53	.42
538-70553-0001	70553-0001	C	2	15µ" Gold	.29	.10	.74	.62	.50	.39
538-70553-0106	70553-0106	C	2	30µ" Gold	.29	.10	.76	.64	.52	.48
538-70553-0037	70553-0037	C	3	Tin	.40	.20	.94	.75	.62	.50
538-70553-0002	70553-0002	C	3	15µ" Gold	.40	.20	1.05	.84	.65	.53
538-70553-0038	70553-0038	C	4	Tin	.50	.30	.65	.53	.48	.44
538-70553-0003	70553-0003	C	4	15µ" Gold	.50	.30	.95	.80	.64	.50
538-70553-0108	70553-0108	C	4	30µ" Gold	.50	.30	1.20	1.11	.96	.77
538-70553-0039	70553-0039	C	5	Tin	.60	.40	.95	.80	.64	.55
538-70553-0004	70553-0004	C	5	15µ" Gold	.60	.40	1.21	.99	.73	.69
538-70553-0040	70553-0040	C	6	Tin	.70	.50	.97	.82	.68	.57
538-70553-0005	70553-0005	C	6	15µ" Gold	.70	.50	1.17	.98	.79	.65
538-70553-0006	70553-0006	C	7	15µ" Gold	.80	.60	1.34	1.12	.90	.79
538-70553-0007	70553-0007	C	8	15µ" Gold	.90	.70	1.14	1.06	.99	.89
538-70553-0008	70553-0008	C	9	15µ" Gold	1.00	.80	1.79	1.42	1.18	.95
538-70553-0009	70553-0009	C	10	15µ" Gold	1.10	.90	1.61	1.38	1.10	.87
538-70553-0011	70553-0011	C	12	15µ" Gold	1.30	1.10	1.79	1.40	1.20	1.10

Headers with Plastic Tri-Peg

Features:

- Locking crown secures positive latch to header
- Polarization slots guide front ribs of mating connector to prevent pin damage
- Standoffs minimize flux retention
- Surface mount compatible
- Mates with series 70066
- Wire to board
- RoHS Compliant per Molex documentation
- Housing: Black glass filled PCT, UL 94V-0
- Contact: Phosphor bronze, .025" square

For quantities of 1000 and up, call for quote.

MOUSER STOCK NO.	Molex Part No.	Fig.	No. of Cir.	Contact Plating	Dim. (In.)		Price Each			
					A	B	1	10	100	500
538-70555-0001	70555-0001	D	2	Tin	.336	.10	.74	.63	.55	.49
538-70555-0036	70555-0036	D	2	15µ" Gold	.336	.10	.85	.71	.58	.51
538-70555-0071	70555-0071	D	2	30µ" Gold	.336	.10	.82	.74	.67	.60
538-70555-0002	70555-0002	D	3	Tin	.436	.20	.64	.56	.51	.47
538-70555-0037	70555-0037	D	3	15µ" Gold	.436	.20	.65	.52	.47	.44
538-70555-0072	70555-0072	D	3	30µ" Gold	.436	.20	.67	.57	.50	.47
538-70555-0003	70555-0003	D	4	Tin	.536	.30	.61	.51	.46	.41
538-70555-0038	70555-0038	D	4	15µ" Gold	.536	.30	.75	.66	.59	.55
538-70555-0073	70555-0073	D	4	30µ" Gold	.536	.30	.82	.73	.61	.49
538-70555-0004	70555-0004	D	5	Tin	.64	.40	.86	.72	.66	.61
538-70555-0039	70555-0039	D	5	15µ" Gold	.636	.40	.71	.63	.59	.57
538-70555-0074	70555-0074	D	5	30µ" Gold	.636	.40	1.21	1.12	1.04	.93
538-70555-0005	70555-0005	D	6	Tin	.736	.50	1.06	.95	.80	.65
538-70555-0040	70555-0040	D	6	15µ" Gold	.736	.50	1.08	.97	.88	.77
538-70555-0075	70555-0075	D	6	30µ" Gold	.74	.50	1.05	.88	.81	.77
538-70555-0041	70555-0041	D	7	15µ" Gold	.836	.60	.99	.86	.77	.72</