


MOLEX Mini-Fit Jr.™ Connectors

molex
one company > a world of innovation

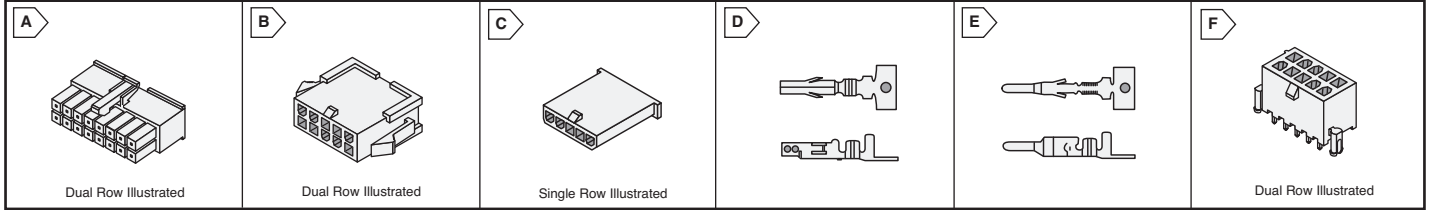

MINI-FIT JR.™ CONNECTORS

Wire-to-wire and wire-to-board versions. The mated length of the wire-to-wire version is less than 1 3/8" while the wire-to-board version is less than 15/16". Despite it's small size it can handle the I/O currents of most standard equipment. They are high density, high current power connectors.

Specifications:

- Pitch: 4.2mm (.165")
- Current: up to 9A
- Contact resistance: 10mΩ
- Voltage: 600V
- Housing: 6/6 nylon
- Temperature: -40°C to +105°C

Features:

- Positive housing locks
- Fully isolated terminals
- Intermateable with Mini-Fit BMI, SMC, CPl
- Contacts sold separately



Receptacles and Plugs

For quantities of 500 and up, call for quote.

MOUSER STOCK NO.	Molex Part No.	Fig.	No. of Circuits	UL Rating	Price Each		
					1	10	100
Receptacles, Single Row 5557 Series							
538-39-01-4030	39-01-4030	A	3	94V-2	.46	.37	.26
538-39-01-4031	39-01-4031	A	3	94V-0	.63	.52	.38
538-39-01-4040	39-01-4040	A	4	94V-2	.54	.44	.31
538-39-01-4041	39-01-4041	A	4	94V-0	.77	.64	.45
538-39-01-4050	39-01-4050	A	5	94V-2	.57	.47	.33
538-39-01-4051	39-01-4051	A	5	94V-0	.72	.61	.45
Receptacles, Dual Row 5557d Series							
538-39-01-2020	39-01-2020	A	2	94V-2	.32	.24	.19
538-39-01-2025	39-01-2025	A	2	94V-0	.61	.54	.35
538-39-01-2040	39-01-2040	A	4	94V-2	.35	.30	.22
538-39-01-2045	39-01-2045	A	4	94V-0	.58	.47	.32
538-39-01-2060	39-01-2060	A	6	94V-2	.40	.37	.26
538-39-01-2065	39-01-2065	A	6	94V-0	.83	.73	.45
538-39-01-2080	39-01-2080	A	8	94V-2	.46	.35	.31
538-39-01-2085	39-01-2085	A	8	94V-0	.88	.78	.52
538-39-01-2100	39-01-2100	A	10	94V-2	.68	.59	.39
538-39-01-2105	39-01-2105	A	10	94V-0	.98	.82	.55
538-39-01-2120	39-01-2120	A	12	94V-2	.69	.61	.44
538-39-01-2125	39-01-2125	A	12	94V-0	.98	.82	.55
538-39-01-2140	39-01-2140	A	14	94V-2	.90	.79	.52
538-39-01-2145	39-01-2145	A	14	94V-0	1.25	1.02	.74
538-39-01-2160	39-01-2160	A	16	94V-2	.91	.80	.53
538-39-01-2165	39-01-2165	A	16	94V-0	1.50	1.28	.90
538-39-01-2180	39-01-2180	A	18	94V-2	.91	.87	.61
538-39-01-2185	39-01-2185	A	18	94V-0	1.72	1.52	1.02
538-39-01-2200	39-01-2200	A	20	94V-2	1.12	.93	.66
538-39-01-2205	39-01-2205	A	20	94V-0	1.84	1.53	1.08
538-39-01-2240	39-01-2240	A	24	94V-2	1.24	1.09	.80
538-39-01-2245	39-01-2245	A	24	94V-0	1.90	1.58	1.12
Plugs - Panel Mount, Single Row 5559s Series							
538-39-01-4032	39-01-4032	B	3	94V-2	.50	.41	.29
538-39-01-4052	39-01-4052	B	5	94V-2	.56	.45	.32
Plugs - Panel Mount, Dual Row 5559d Series							
538-39-01-2021	39-01-2021	B	2	94V-2	.46	.40	.27
538-39-01-2026	39-01-2026	B	2	94V-0	.69	.60	.40
538-39-01-2041	39-01-2041	B	4	94V-2	.50	.45	.30
538-39-01-2061	39-01-2061	B	6	94V-2	.55	.47	.31
538-39-01-2081	39-01-2081	B	8	94V-2	.59	.50	.34
538-39-01-2101	39-01-2101	B	10	94V-2	.68	.59	.39
538-39-01-2106	39-01-2106	B	10	94V-0	.79	.70	.59
538-39-01-2121	39-01-2121	B	12	94V-2	.72	.65	.42
538-39-01-2126	39-01-2126	B	12	94V-0	.89	.79	.64
538-39-01-2141	39-01-2141	B	14	94V-2	.85	.69	.54
538-39-01-2161	39-01-2161	B	16	94V-2	1.05	.81	.63
Plugs - Free Hanging, Single Row 5559s Series							
538-39-01-4036	39-01-4036	C	3	94V-2	.49	.42	.28
538-39-01-4037	39-01-4037	C	3	94V-0	.63	.52	.38
538-39-01-4056	39-01-4056	C	5	94V-2	.56	.49	.33
Plugs - Free Hanging, Dual Row 5559d Series							
538-39-01-3023	39-01-3023	C	2	94V-2	.38	.31	.24
538-39-01-3029	39-01-3029	C	2	94V-0	.70	.35	.30
538-39-01-3043	39-01-3043	C	4	94V-2	.42	.34	.25
538-39-01-3049	39-01-3049	C	4	94V-0	.75	.50	.38
538-39-01-3063	39-01-3063	C	6	94V-2	.53	.47	.24
538-39-01-3069	39-01-3069	C	6	94V-0	.82	.67	.51
538-39-01-3083	39-01-3083	C	8	94V-2	.64	.55	.35
538-39-01-3089	39-01-3089	C	8	94V-0	.88	.72	.61
538-39-01-3103	39-01-3103	C	10	94V-2	.65	.58	.39
538-39-01-3163	39-01-3163	C	16	94V-2	.98	.94	.66



Strain Reliefs - 41995 Series

RoHS Compliant

For quantities of 500 and up, call for quote.

MOUSER STOCK NO.	Molex Part No.	No. of Circuits	Price Each		
			1	10	100
538-15-04-0296	15-04-0296	6	1.66	1.21	1.12
538-15-04-0343	15-04-0343	8	1.89	1.44	1.28

Contacts

Plating:

- a - Tin over Copper
- b - Tin over Brass
- c - Gold over Brass
- d - Gold over Phosphor Bronze
- e - Tin over Phosphor Bronze

For quantities of 1000 and up, call for quote.

MOUSER STOCK NO.	Molex Part No.	Fig.	Style	Plating	Wire Size	Price Each		
						1	100	500
Standard 44476/44478 Series Crimp Terminals								
538-44476-3112	44476-3112	D	Female	a	16	.17	.15	.13
538-44476-1112	44476-1112	D	Female	a	18-20	.17	.15	.13
538-44478-3112	44478-3112	E	Male	a	16	.30	.19	.15
538-44478-1112	44478-1112	E	Male	a	18-20	.20	.18	.15
Standard 5556/5558 Series Crimp Terminals								
538-39-00-0078	39-00-0078	D	Socket	b	16	.17	.15	.13
538-39-00-0090	39-00-0090	D	Socket	c	16	.51	.40	.32
538-39-00-0168	39-00-0168	D	Socket	c	16	.46	.38	.32
538-39-00-0186	39-00-0186	D	Socket	d	16	.71	.54	.45
538-39-00-0080	39-00-0080	D	Socket	e	16	.18	.16	.14
538-39-00-0039	39-00-0039	D	Socket	b	18-24	.11	.09	.08
538-39-00-0164	39-00-0164	D	Socket	c	18-24	.46	.38	.32
538-39-00-0182	39-00-0182	D	Socket	d	18-24	.71	.54	.45
538-39-00-0060	39-00-0060	D	Socket	e	18-24	.17	.15	.13
538-39-00-0047	39-00-0047	D	Socket	b	22-28	.10	.08	.07
538-39-00-0086	39-00-0086	D	Socket	c	22-28	.46	.33	.31
538-39-00-0184	39-00-0184	D	Socket	d	22-28	.71	.54	.45
538-39-00-0082	39-00-0082	E	Pin	b	16	.15	.10	.08
538-39-00-0041	39-00-0041	E	Pin	b	18-24	.10	.09	.08
538-39-00-0054	39-00-0054	E	Pin	c	18-24	.50	.40	.35
538-39-00-0220	39-00-0220	E	Pin	d	18-24	.69	.52	.43
538-39-00-0049	39-00-0049	E	Pin	b	22-28	.10	.09	.08
538-39-00-0088	39-00-0088	E	Pin	c	22-28	.46	.38	.32
538-39-00-0222	39-00-0222	E	Pin	d	24-28	.69	.52	.43

PCB Headers

- Contact Included




RoHS Compliant

For quantities of 500 and up, call for quote.

MOUSER STOCK NO.	Molex Part No.	Fig.	No. of Circuits	UL Rating	Contact Plating	Price Each		
						1	10	100
Vertical, Single Row with Pegs 5566 Series								
538-39-30-1039	39-30-1039	F	3	94V-2	Tin	1.00	.82	.59
538-39-30-2031	39-30-2031	F	3	94V-2	Gold	3.28	2.46	1.64
538-39-30-2050	39-30-2050	F	5	94V-0	Tin	1.22	.91	.78
Vertical, Single Row with Pegs and Drain Holes 5566 Series								
538-39-30-2035	39-30-2035	F	3	94V-2	Tin	.98	.95	.63
538-39-30-2045	39-30-2045	F	4	94V-2	Tin	1.17	1.10	.93
538-39-30-2047	39-30-2047	F	4	94V-2	Gold	1.76	1.47	1.23
538-39-30-2056	39-30-2056	F	5	94V-0	Tin	1.61	1.52	1.10
538-39-30-2058	39-30-2058	F	5	94V-0	Gold	2.33	2.05	1.81
Vertical, Dual Row with Pegs 5566 Series								
538-39-29-9025	39-29-9025	F	2	94V-2	Gold	1.86	1.40	.93
538-39-29-9043	39-29-9043	F	4	94V-2	Tin	.75	.64	.57
538-39-29-9047	39-29-9047	F	4	94V-0	Tin	.89	.74	.69
538-39-29-9163	39-29-9163	F	16	94V-2	Tin	1.76	1.59	1.43
538-39-29-9243	39-29-9243	F	24	94V-2	Tin	2.81	2.39	2.25
Vertical, Dual Row with Pegs and Drain Holes 5566 Series								
538-39-29-9042	39-29-9042	F	4	94V-2	Tin	.88	.78	.52
538-39-29-9046	39-29-9046	F	4	94V-0	Tin	.86	.68	.54
538-39-28-9048	39-28-9048	F	4	94V-0	Gold	3.68	2.56	2.02
538-39-29-9062	39-29-9062	F	6	94V-2	Tin	1.05	.88	.72
538-39-29-9066	39-29-9066	F	6	94V-0	Tin	1.14	.94	.78
538-39-28-9068	39-28-9068	F	6	94V-0	Gold	2.46	2.32	2.01
538-39-29-9086	39-29-9086	F	8	94V-0	Tin	1.21	1.02	.89
538-39-28-9088	39-28-9088	F	8	94V-0	Gold	5.05	4.03	2.89
538-39-29-9102	39-29-9102	F	10	94V-2	Tin	1.24	1.05	.92
538-39-29-9146	39-29-9146	F	14	94V-0	Tin	2.49	2.38	2.07
538-39-29-9162	39-29-9162	F	16	94V-2	Tin	1.98	1.79	1.52
538-39-29-9202	39-29-9202	F	20	94V-2	Tin	1.98	1.65	1.21
538-39-29-9206	39-29-9206	F	20	94V-0	Tin	2.33	2.18	1.92
538-39-29-9242	39-29-9242	F	24	94V-2	Tin	2.18	2.11	1.84
538-39-29-9246	39-29-9246	F	24	94V-0	Tin	3.02	2.56	2.32

MOLEX Mini-Fit Jr.™ and Mini-Fit CPI™ Connectors

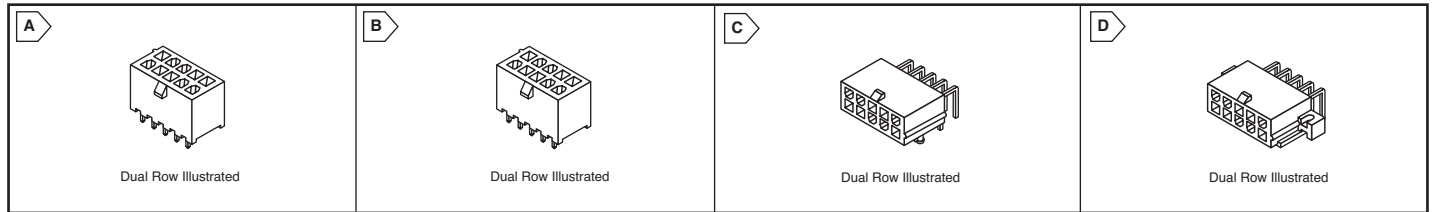molex
one company > a world of innovation

MINI-FIT JR.™ CONNECTORS

Wire-to-wire and wire-to-board versions. The mated length of the wire-to-wire version is less than 1 3/8" while the wire-to-board version is less than 15/16". Despite it's small size it can handle the I/O currents of most standard equipment. They are high density, high current power connectors.

Specifications:

- Pitch: 4.2mm (.165")
- Current: up to 9A
- Contact resistance: 10mΩ
- Voltage: 600V
- Housing: 6/6 nylon
- Temperature: -40°C to +105°C

Features:

- Positive housing locks
- Fully isolated terminals
- Intermateable with Mini-Fit BMI, SMC, CPI
- Contacts sold separately



PCB Headers (cont.)

• Contact Included For quantities of 500 and up, call for quote.

MOUSER STOCK NO.	Molex Part No.	Fig.	No. of Circuits	UL Rating	Contact Plating	Price Each		
						1	10	100
Vertical, Dual Row without Pegs, with Drain Holes 5566 Series								
538-39-31-0028	39-31-0028	A	2	94V-0	Gold	.79	.72	.65
538-39-31-0040	39-31-0040	A	4	94V-0	Tin	.74	.69	.60
538-39-31-0048	39-31-0048	A	4	94V-0	Gold	1.46	1.39	1.28
538-39-29-3066	39-29-3066	A	6	94V-2	Tin	.71	.67	.59
538-39-31-0060	39-31-0060	A	6	94V-0	Tin	.83	.81	.62
538-39-29-3106	39-29-3106	A	10	94V-2	Tin	1.16	1.09	.94
538-39-31-0108	39-31-0108	A	10	94V-0	Gold	2.89	2.81	2.70
538-39-29-3166	39-29-3166	A	16	94V-2	Tin	3.10	2.82	1.85
538-39-29-3206	39-29-3206	A	20	94V-2	Tin	1.86	1.77	1.54
Vertical, Dual Row without Pegs or Drain Holes 5566 Series								
538-39-28-1023	39-28-1023	B	2	94V-2	Tin	.77	.72	.45
538-39-28-8020	39-28-8020	B	2	94V-0	Tin	.67	.56	.45
538-39-29-0023	39-29-0023	B	2	94V-2	Gold	1.22	.96	.81
538-39-28-1043	39-28-1043	B	4	94V-2	Tin	.99	.85	.58
538-39-28-8040	39-28-8040	B	4	94V-0	Tin	1.18	.99	.69
538-39-29-0043	39-29-0043	B	4	94V-2	Gold	2.74	2.27	1.41
538-39-28-1063	39-28-1063	B	6	94V-2	Tin	1.34	1.11	.79
538-39-28-8060	39-28-8060	B	6	94V-0	Tin	1.69	1.48	.98
538-39-29-0063	39-29-0063	B	6	94V-2	Gold	2.36	2.10	1.87
538-39-28-1083	39-28-1083	B	8	94V-2	Tin	1.52	1.27	.91
538-39-28-8080	39-28-8080	B	8	94V-0	Tin	2.03	1.48	1.02
538-39-28-1103	39-28-1103	B	10	94V-2	Tin	1.78	1.55	1.01
538-39-28-8100	39-28-8100	B	10	94V-0	Tin	2.72	1.89	1.20
538-39-29-0103	39-29-0103	B	10	94V-2	Gold	3.18	3.02	2.87
538-39-28-1123	39-28-1123	B	12	94V-2	Tin	1.90	1.61	1.15
538-39-28-8120	39-28-8120	B	12	94V-0	Tin	2.44	2.02	1.49
538-39-28-1143	39-28-1143	B	14	94V-2	Tin	2.40	2.14	1.50
538-39-28-1163	39-28-1163	B	16	94V-2	Tin	2.89	2.55	1.71
538-39-28-1183	39-28-1183	B	18	94V-2	Tin	3.40	3.02	2.02
538-39-28-1203	39-28-1203	B	20	94V-2	Tin	3.75	3.10	2.20
538-39-28-8200	39-28-8200	B	20	94V-0	Tin	4.69	2.83	1.91
538-39-28-1243	39-28-1243	B	24	94V-2	Tin	4.25	3.55	2.50
Right Angle, Single Row with Pegs 5569 Series								
538-39-30-3035	39-30-3035	C	3	94V-2	Tin	1.20	1.06	.70
538-39-30-3036	39-30-3036	C	3	94V-0	Tin	1.30	1.15	.88
538-39-30-3038	39-30-3038	C	3	94V-0	Gold	1.44	1.37	1.18
538-39-30-3045	39-30-3045	C	4	94V-2	Tin	1.33	1.19	.72
538-39-30-3047	39-30-3047	C	4	94V-2	Gold	1.89	1.55	1.25
538-39-30-3055	39-30-3055	C	5	94V-2	Tin	1.62	1.42	.95
538-39-30-3056	39-30-3056	C	5	94V-0	Tin	2.56	1.92	1.28
538-39-30-3058	39-30-3058	C	5	94V-2	Gold	2.31	2.10	1.73
Right Angle, Dual Row with Pegs 5569 Series								
538-39-30-1020	39-30-1020	C	2	94V-2	Tin	.68	.65	.52
538-39-30-0020	39-30-0020	C	2	94V-0	Tin	.91	.65	.57

PCB Headers (cont.)

• Contact Included For quantities of 500 and up, call for quote.

MOUSER STOCK NO.	Molex Part No.	Fig.	No. of Circuits	UL Rating	Contact Plating	Price Each		
						1	10	100
Right Angle, Dual Row with Pags 5569 Series (Cont.)								
538-39-30-1040	39-30-1040	C	4	94V-2	Tin	.91	.70	.58
538-39-30-0040	39-30-0040	C	4	94V-0	Tin	.91	.72	.63
538-39-30-1060	39-30-1060	C	6	94V-2	Tin	1.07	.88	.70
538-39-30-0060	39-30-0060	C	6	94V-0	Tin	1.21	1.05	.88
538-39-30-1080	39-30-1080	C	8	94V-2	Tin	1.56	.97	.65
538-39-30-0080	39-30-0080	C	8	94V-0	Tin	1.47	1.10	.95
538-39-30-1082	39-30-1082	C	8	94V-2	Gold	2.68	2.21	1.92
538-39-30-1100	39-30-1100	C	10	94V-2	Tin	1.41	1.06	.72
538-39-30-0100	39-30-0100	C	10	94V-0	Tin	1.89	1.35	1.18
538-39-30-1120	39-30-1120	C	12	94V-2	Tin	1.82	1.42	1.08
538-39-30-0120	39-30-0120	C	12	94V-0	Tin	1.74	1.58	1.42
538-39-30-1121	39-30-1121	C	12	94V-0	Gold	3.50	2.72	2.37
538-39-30-1140	39-30-1140	C	14	94V-2	Tin	1.87	1.46	1.26
538-39-30-1142	39-30-1142	C	14	94V-0	Gold	5.21	4.05	3.71
538-39-30-1160	39-30-1160	C	16	94V-2	Tin	2.18	1.64	1.38
538-39-30-0160	39-30-0160	C	16	94V-0	Tin	2.89	2.26	1.86
538-39-30-1162	39-30-1162	C	16	94V-0	Gold	6.64	4.98	4.15
538-39-30-1180	39-30-1180	C	18	94V-2	Tin	1.93	1.60	1.35
538-39-30-1200	39-30-1200	C	20	94V-2	Tin	2.16	1.84	1.62
538-39-30-0200	39-30-0200	C	20	94V-0	Tin	3.29	3.08	2.65
538-39-30-1240	39-30-1240	C	24	94V-2	Tin	3.18	2.89	2.71
Right Angle, Dual Row with Flanges 5569 Series								
538-39-29-1028	39-29-1028	D	2	94V-2	Tin	.86	.67	.51
538-39-29-1027	39-29-1027	D	2	94V-0	Tin	.81	.60	.49
538-39-29-1048	39-29-1048	D	4	94V-2	Tin	.86	.71	.58
538-39-29-1047	39-29-1047	D	4	94V-0	Tin	1.00	.89	.80
538-39-29-1068	39-29-1068	D	6	94V-2	Tin	1.10	.89	.77
538-39-29-1088	39-29-1088	D	8	94V-2	Tin	1.40	1.05	.88
538-39-29-1108	39-29-1108	D	10	94V-2	Tin	1.49	1.11	1.05
538-39-29-1128	39-29-1128	D	12	94V-2	Tin	1.95	1.76	1.54
538-39-29-1148	39-29-1148	D	14	94V-2	Tin	1.76	1.56	1.44
538-39-29-1168	39-29-1168	D	16	94V-2	Tin	2.27	2.04	1.83
538-39-29-1208	39-29-1208	D	20	94V-2	Tin	3.09	2.90	2.52

Tools

MOUSER STOCK NO.	Molex Part No.	Description	Wire Size AWG	Price Each
538-63811-5000	63811-5000	Hand Crimp Tool	18-24	241.72
538-63811-5100	63811-5100	Hand Crimp Tool	22-28	241.72
538-11-03-0044	11-03-0044	Extraction Tool	- - -	19.32

MINI-FIT CPI™ COMPLIANT PIN INTERFACE HEADERS

Specifications:

- Pitch: 4.2mm (.165")
- Current: up to 8.0A max.
- Contact Resistance: 10mΩ max.
- Voltage: 600V
- Housing: 4/6 Nylon
- Temperature: -40°C to +105°C

Features:

- Press-fit pin requiring no soldering
- Blind mating vertical header
- Designed for multiple board thicknesses of .094" and greater
- Mates with 42385, 42474 and 5557 Series Receptacles

