

SPECTRUM CONTROL Ferrite Filtered D-Sub Connectors

SPECTRUM CONTROL INC

SERIES 400 FERRITE FILTERED CONNECTORS

The Series 400 ferrite filtered connector is designed as a low cost EMI solution for high frequency interference. The space saving connectors incorporate a solid slab of ferrite material as the filtering element.

Features:

- Prevents common-mode noise in signal lines of data communication terminals and digital devices
- Drop In replacements for standard .318" d-sub connectors
- Replaces individual ferrite beads, saving cost and space
- Effective in helping meet requirements of FCC, VDE, EN55022 and Japan's VCCI

Specifications:

- Operating Temperature: -40°C to +105°C
- Frequency Range: 10 – 300 MHz
- Current Rating: 5 Amps
- Dielectric Withstand Voltage: 1000 VAC for one min
- Shell: Steel (Tin Plated)
- Plug Contacts: Brass
- Recept. Contacts: Phosphor Bronze
- Contact Plated: Gold Flash

For quantities of 100 and up, call for quote.

MOUSER STOCK NO.	Spectrum Control Part No.	Fig.	Type	No. of Contacts	Typ. Impedance (Ω)		Price Each			
					25 MHz	100 MHz	1	10	25	50
657-56-402-001	56-402-001	A	Plug	9	30	50	2.23	2.11	2.05	1.98
657-56-404-001	56-404-001	B	Receptacle	9	30	50	2.23	2.11	2.05	1.98
657-56-412-001	56-412-001	A	Plug	15	30	50	2.86	2.70	2.62	2.54
657-56-413-001	56-413-001	C	Receptacle	15	30	50	2.99	2.82	2.74	2.66
657-56-422-001	56-422-001	A	Plug	25	30	50	3.15	2.98	2.89	2.80
657-56-424-001	56-424-001	B	Receptacle	25	30	50	2.81	2.65	2.57	2.50

SERIES 700 HIGH PERFORMANCE FILTERED CONNECTORS

Spectrum Control Series 700 Connectors offer the highest performance filtering for all types of professional applications.

Features:

- One piece diecast housing design
- Tubular capacitor filtering provides effective performance through 10 GHz
- UL Recognized: File #E149046

Specifications:

- Shell: Zinc diecast, nickel plated
- Contacts: Copper alloy
- Plug Contacts: 15µ" Gold plated over nickel
- Receptacle Contacts: 30µ" Gold plated over nickel
- Temperature: -55°C to +125°C
- Current Rating: 5 Amps
- Contact Resistance: 10 milliohms maximum

For quantities of 100 and up, call for quote.

MOUSER STOCK NO.	Spectrum Control Part No.	Fig.	Type	No. of Contacts	EMI Filter Capacitance Value	Price Each			
						1	10	25	50
Printed Circuit Board Right Angle Mount									
657-56-702-005	56-702-005	D	Plug	9	4000 pF Pi	33.03	31.20	30.28	29.36
657-56-704-005	56-704-005	E	Receptacle	9	4000 pF Pi	34.34	32.44	31.48	30.53
657-56-712-005	56-712-005	D	Plug	15	4000 pF Pi	46.15	43.59	42.31	41.02
657-56-714-005	56-714-005	E	Receptacle	15	4000 pF Pi	47.93	45.27	43.94	42.61
657-56-722-005	56-722-005	D	Plug	25	4000 pF Pi	69.59	65.72	63.79	61.86
657-56-724-005	56-724-005	E	Receptacle	25	4000 pF Pi	72.41	68.39	66.38	64.37
Solder Cup Termination									
657-56-701-011	56-701-011	F	Plug	9	310 pF Pi	28.69	27.10	26.30	25.50
657-56-701-013	56-701-013	F	Plug	9	1000 pF Pi	30.62	28.92	28.07	27.22
657-56-701-015	56-701-015	F	Plug	9	4000 pF Pi	31.79	30.02	29.14	28.26
657-56-706-001	56-706-001	G	Receptacle	9	310 pF Pi	35.01	33.07	32.09	31.12
657-56-706-003	56-706-003	G	Receptacle	9	1000 pF Pi	37.80	35.70	34.65	33.60
657-56-706-005	56-706-005	G	Receptacle	9	4000 pF Pi	39.29	37.11	36.02	34.93
657-56-711-011	56-711-011	F	Plug	15	310 pF Pi	40.01	37.79	36.68	35.57
657-56-711-013	56-711-013	F	Plug	15	1000 pF Pi	43.24	40.83	39.63	38.43
657-56-711-015	56-711-015	F	Plug	15	4000 pF Pi	45.16	42.65	41.40	40.14
657-56-716-001	56-716-001	G	Receptacle	15	310 pF Pi	48.37	45.68	44.34	42.99
657-56-716-003	56-716-003	G	Receptacle	15	1000 pF Pi	51.82	48.94	47.50	46.06
657-56-716-005	56-716-005	G	Receptacle	15	4000 pF Pi	55.12	52.05	50.52	48.99
657-56-721-011	56-721-011	F	Plug	25	310 pF Pi	60.53	57.17	55.49	53.81
657-56-721-013	56-721-013	F	Plug	25	1000 pF Pi	65.99	62.32	60.49	58.66
657-56-721-015	56-721-015	F	Plug	25	4000 pF Pi	69.28	65.43	63.51	61.58
657-56-726-003	56-726-003	G	Receptacle	25	1000 pF Pi	77.26	72.96	70.82	68.67
657-56-726-005	56-726-005	G	Receptacle	25	4000 pF Pi	81.22	76.70	74.45	72.19
657-56-731-011	56-731-011	F	Plug	37	310 pF Pi	104.94	99.11	96.20	93.28
657-56-731-013	56-731-013	F	Plug	37	1000 pF Pi	114.70	108.32	105.14	101.95
657-56-731-015	56-731-015	F	Plug	37	4000 pF Pi	120.69	113.99	110.63	107.28
657-56-736-001	56-736-001	G	Receptacle	37	310 pF Pi	125.55	118.58	115.09	111.60

Plug/Receptacle Adapter

In-line design allows EMI/RFI filtering to be added externally to equipment. Utilizes existing D-Sub connectors. No gender changer required. Offers same protection as soldered in filters.

LI Suffix=4-40 UNC Inserts


For quantities of 50 and up, call for quote.

MOUSER STOCK NO.	Spectrum Control Part No.	Fig.	No. of Contacts	EMI Filter Capacitance Value	Price Each		
					1	10	25
657-56-705-001	56-705-001	H	9	310 pF Pi	28.69	27.10	26.30
657-56-705-008	56-705-008	H	9	830 pF Pi	25.43	24.02	23.31
657-56-705-003	56-705-003	H	9	1000 pF Pi	30.62	28.92	28.07
657-56-705-005	56-705-005	H	9	4000 pF Pi	31.95	30.18	29.29
657-56-715-008-LI	56-715-008-LI	H	15	100 pF Pi	75.06	70.89	68.81
657-56-715-001	56-715-001	H	15	310 pF Pi	40.01	37.79	36.68
657-56-715-003-LI	56-715-003-LI	H	15	1000 pF Pi	46.67	44.08	42.78
657-56-715-003	56-715-003	H	15	1000 pF Pi	43.24	40.83	39.63
657-56-715-005	56-715-005	H	15	4000 pF Pi	48.37	45.68	44.34
657-56-725-001	56-725-001	H	25	310 pF Pi	60.53	57.17	55.49
657-56-725-003-LI	56-725-003-LI	H	25	1000 pF Pi	69.43	65.57	63.64
657-56-725-003	56-725-003	H	25	1000 pF Pi	65.99	62.32	60.49
657-56-725-005	56-725-005	H	25	4000 pF Pi	69.28	65.43	63.51
657-56-735-001	56-735-001	H	37	310 pF Pi	104.94	99.11	96.20
657-56-735-003-LI	56-735-003-LI	H	37	1000 pF Pi	118.75	112.15	108.85
657-56-735-003	56-735-003	H	37	1000 pF Pi	114.70	108.32	105.14
657-56-735-005-LI	56-735-005-LI	H	37	4000 pF Pi	124.74	117.81	114.35
657-56-735-005	56-735-005	H	37	4000 pF Pi	120.69	113.99	110.63
657-56-745-003	56-745-003	H	50	1000 pF Pi	150.08	141.75	137.58

Catalog #622, May - July 2005
© Copyright 2005 Mouser Electronics



Catalog #622, May - July 2005
© Copyright 2005 Mouser Electronics

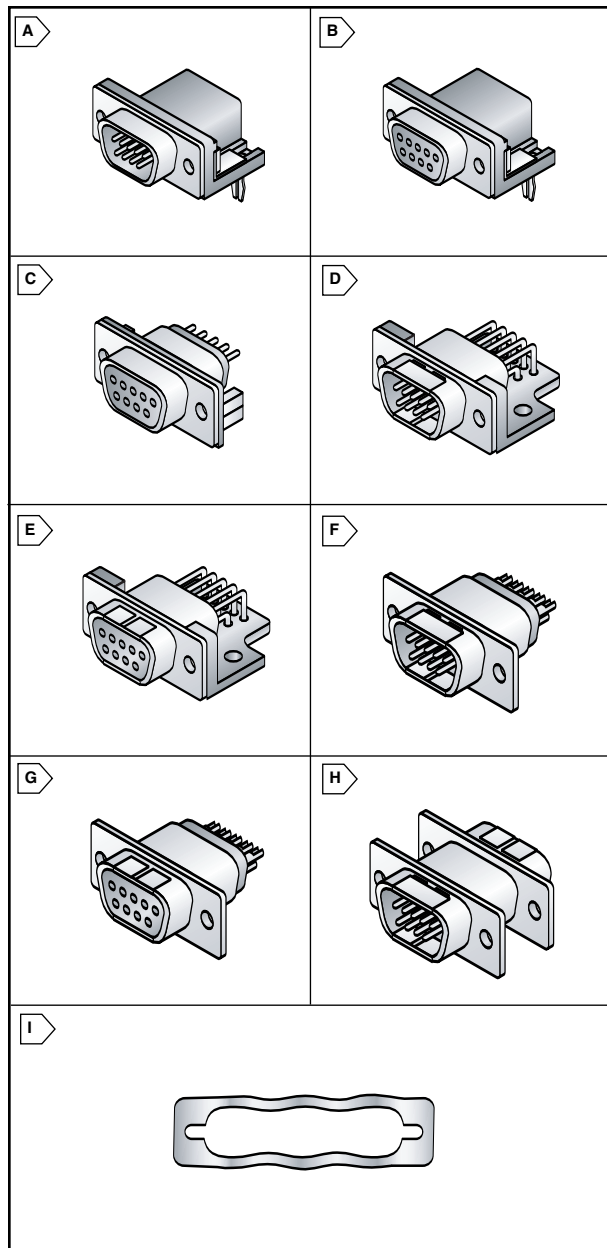

WAVED METAL GASKETS

Waved metal gaskets adjust for mounting surface irregularities, resulting in optimum filtering performance.

Specifications:

- Material: Beryllium Copper
- Finish: Electro Tin Plate
- Material Thickness: .005" Compresses
- Wave Length: .030"

Front Mounted Plug or Receptacle Connector, Rear Mounted Plug

For quantities of 50 and up, call for quote.

MOUSER STOCK NO.	Spectrum Control Part No.	Fig.	Shell Size	Price Each		
				1	10	25
657-572019-100-70	572019-00100-70	I	9	1.10	1.04	.98
657-572019-101-70	572019-00101-70	I	15	1.26	1.19	1.12
657-572019-102-70	572019-00102-70	I	25	1.55	1.46	1.38
657-572019-103-70	572019-00103-70	I	37	2.05	1.94	1.82

Rear Mounted Receptacle Only

For quantities of 50 and up, call for quote.

MOUSER STOCK NO.	Spectrum Control Part No.	Fig.	Shell Size	Price Each		
				1	10	25
657-572019-105-70	572019-00105-70	I	9	1.01	.95	.90
657-572019-106-70	572019-00106-70	I	15	1.26	1.19	1.12
657-572019-107-70	572019-00107-70	I	25	1.55	1.46	1.38
657-572019-108-70	572019-00108-70	I	37	2.05	1.94	1.82