

AMPHENOL D-Subminiature Connectors

Amphenol®

FIXED MACHINED SOLDER CUP CONTACTS

Materials:

- Shells: Steel yellow chromate over zinc
- Contact: Brass
- Contact Plating: Gold
- Insulator: Black Thermoplastic, UL94V0

Specifications:

- Temperature Range: -67°F to 185°F
- Current Rating: 7.5A
- Voltage Rating: 300V
- Max Wire: 20 AWG.

Standards:

- UL File: E119881
- MIL C24308

For quantities of 250 and up, call for quote.

MOUSER STOCK NO.	Amphenol Part No.	Fig.	No. of Pins	Type	Price Each			
					1	10	50	100
523-17-DE09P	17-DE09P	A	9	Male	2.25	1.94	1.76	1.62
523-17-DE09S	17-DE09S	A	9	Female	2.95	2.58	2.40	2.25
523-17-DA15P	17-DA15P	A	15	Male	3.05	2.61	2.39	2.22
523-17-DA15S	17-DA15S	A	15	Female	3.50	3.27	2.75	2.59
523-17-DB25P	17-DB25P	A	25	Male	3.45	3.18	2.72	2.51
523-17-DB25S	17-DB25S	A	25	Female	4.95	4.36	3.95	3.72
523-17-DC37P	17-DC37P	A	37	Male	8.90	7.56	6.95	6.61
523-17-DC37S	17-DC37S	A	37	Female	11.98	10.54	10.01	9.51
523-17-DD50P	17-DD50P	A	50	Male	11.27	10.25	9.74	9.45
523-17-DD50S	17-DD50S	A	50	Female	15.83	14.40	13.82	13.26

FIXED PRECISION-FORMED SOLDER CUP CONTACTS

Materials:

- Shells: Steel yellow chromate over zinc
- Contact: Brass
- Contact Plating: Gold
- Insulator: Black Thermoplastic, UL94V0

Specifications:

- Temperature Range: -67°F to 185°F
- Current Rating: 7.5A
- Voltage Rating: 300V
- Max Wire: 20 AWG.

Standards:

- UL File: E149426
- MIL C24308 - NFC93425 - HE5

For quantities of 250 and up, call for quote.

MOUSER STOCK NO.	Amphenol Part No.	Fig.	No. of Pins	Type	Price Each			
					1	10	50	100
523-17S-DE09P	17S-DE09P	A	9	Male	1.59	1.44	1.24	.96
523-17S-DE09S	17S-DE09S	A	9	Female	1.10	.93	.80	.70
523-17S-DA15P	17S-DA15P	A	15	Male	1.20	1.05	.95	.76
523-17S-DA15S	17S-DA15S	A	15	Female	.85	.74	.61	.55
523-17S-DB25P	17S-DB25P	A	25	Male	1.79	1.57	1.40	1.32
523-17S-DB25S	17S-DB25S	A	25	Female	1.25	1.05	.88	.75
523-17S-DC37P	17S-DC37P	A	37	Male	2.45	2.23	1.97	1.76
523-17S-DC37S	17S-DC37S	A	37	Female	2.69	2.43	2.15	2.04
523-17S-DD50P	17S-DD50P	A	50	Male	4.75	4.10	3.50	3.15
523-17S-DD50S	17S-DD50S	A	50	Female	4.95	4.42	3.98	3.36

FIXED MACHINED CONTACT PCB MOUNT

Materials:

- Shells: Steel yellow chromate over zinc
- Contact: Brass
- Contact Plating: Gold
- Insulator: Black Thermoplastic, UL94V0

Specifications:

- Temperature Range: -67°F to 185°F
- Current Rating: 7.5A
- Voltage Rating: 300V
- PCB Pins: .024" Dia. and .124" Length

Standards:

- UL File: E119881
- MIL C24308

For quantities of 250 and up, call for quote.

MOUSER STOCK NO.	Amphenol Part No.	Fig.	No. of Pins	Type	Price Each			
					1	10	50	100
523-17-DE09P-U	17-DE09P-U	B	9	Male	3.93	3.57	3.39	3.27
523-17-DE09S-U	17-DE09S-U	B	9	Female	4.63	4.22	3.99	3.86
523-17-DA15P-U	17-DA15P-U	B	15	Male	4.69	4.38	4.08	3.75
523-17-DA15S-U	17-DA15S-U	B	15	Female	5.41	4.92	4.67	4.52
523-17-DB25P-U	17-DB25P-U	B	25	Male	5.56	5.17	4.96	4.80
523-17-DB25S-U	17-DB25S-U	B	25	Female	7.25	6.60	6.27	6.08
523-17-DC37P-U	17-DC37P-U	B	37	Male	10.68	9.61	9.08	8.55
523-17-DC37S-U	17-DC37S-U	B	37	Female	11.98	10.90	10.35	10.04
523-17-DD50P-U	17-DD50P-U	B	50	Male	12.70	11.56	10.98	10.64
523-17-DD50S-U	17-DD50S-U	B	50	Female	16.75	15.41	14.79	14.11

FIXED MACHINED CONTACT WIRE WRAP TERMINATION

Materials:

- Shells: Steel yellow chromate over zinc
- Contact: Brass
- Contact Plating: Gold
- Insulator: Black Thermoplastic, UL94V0

Specifications:

- Temperature Range: -67°F to 185°F
- Current Rating: 7.5A
- Voltage Rating: 300V
- PCB Pins: .031" Dia. and .387" Length

Standards:

- UL File: E119881
- MIL C24308

For quantities of 250 and up, call for quote.


MOUSER STOCK NO.	Amphenol Part No.	Fig.	No. of Pins	Type	Price Each			
					1	10	50	100
523-17-DE09P-F179	17-DE09P-F179	C	9	Male	8.81	7.99	7.61	7.38
523-17-DE09S-F179	17-DE09S-F179	C	9	Female	9.34	8.50	8.07	7.82
523-17-DA15P-F179	17-DA15P-F179	C	15	Male	9.48	8.78	8.51	8.25
523-17-DA15S-F179	17-DA15S-F179	C	15	Female	10.78	9.54	9.15	8.96
523-17-DB25P-F179	17-DB25P-F179	C	25	Male	11.72	10.65	10.11	9.81
523-17-DB25S-F179	17-DB25S-F179	C	25	Female	13.20	12.01	11.40	11.00
523-17-DC37P-F179	17-DC37P-F179	C	37	Male	16.37	15.06	14.15	13.12
523-17-DC37S-F179	17-DC37S-F179	C	37	Female	18.78	17.54	16.66	15.98
523-17-DD50P-F179	17-DD50P-F179	C	50	Male	19.98	18.63	18.25	17.70
523-17-DD50S-F179	17-DD50S-F179	C	50	Female	18.97	17.30	16.44	15.90

Catalog #622, May - July 2005
© Copyright 2005 Mouser Electronics

www.mouser.com/amphenol



a tti company

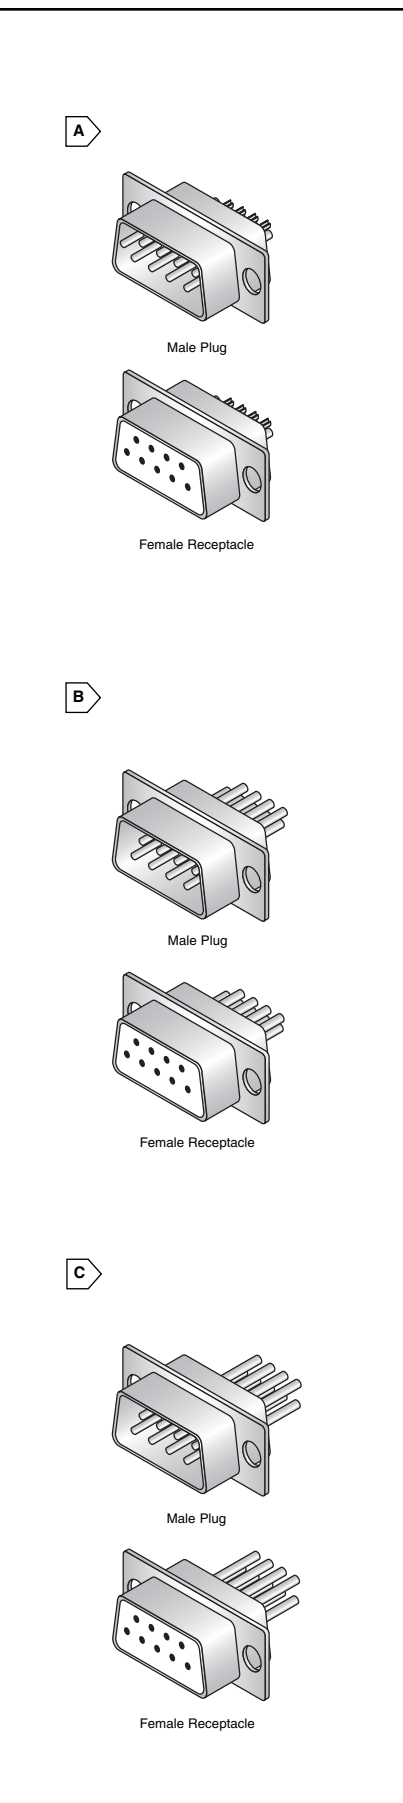

"D" Connectors

Amphenol

(800) 346-6873

Catalog #622, May - July 2005
© Copyright 2005 Mouser Electronics

839