

Black Forest
Mountain
Photodisc
70mm

Lower	TFC
Upper	PowerED

SETI EAM Optical Link Measurements

[illegible]

LASER DIODE TEST DATA

TYPE No. NX8560LJ-CC189

CLASS

K


Lot No. 0228Q

S/N 002

Inspected by



Parameter	Conditions	Value	Unit
I _{op}	-	60.0	mA
V _{mod}	-	2.0	V _{pp}
V _{center}	-	-1.0	V
I _m	@I _{op}	139.4	μA
T _{set}	-	25.0	°C
R _{th}	T _L =T _{set}	10	kΩ
<P _f >	T _L =T _{set} , On modulation	+0.6	dBm
λ _p	T _L =T _{set} , On modulation	1547.0	nm
RF-ER	T _L =T _{set} , On modulation (without Bessel filter)	11.4	dB
RF-ER	T _L =T _{set} , On modulation (with Bessel filter)	10.4	dB

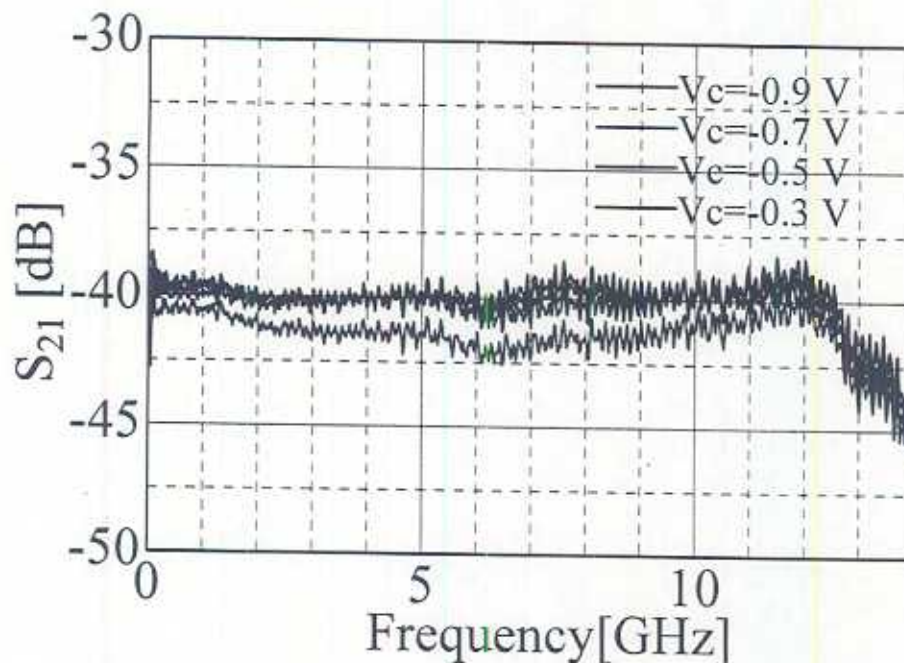

LASER DIODE TEST DATA

TYPE No. NX8560LJ-CC189

CLASS

K


Lot No. 0228Q

S/N 003

Inspected by



Parameter	Conditions	Value	Unit
I _{op}	-	60.0	mA
V _{mod}	-	2.0	V _{pp}
V _{center}	-	-1.2	V
I _m	@I _{op}	439.1	μA
T _{set}	-	25.0	°C
R _{th}	TL=T _{set}	10	kΩ
<PF>	TL=T _{set} , On modulation	+3.2	dBm
λ _p	TL=T _{set} , On modulation	1559.0	nm
RF-ER	TL=T _{set} , On modulation (without Bessel filter)	10.3	dB
RF-ER	TL=T _{set} , On modulation (with Bessel filter)	9.3	dB

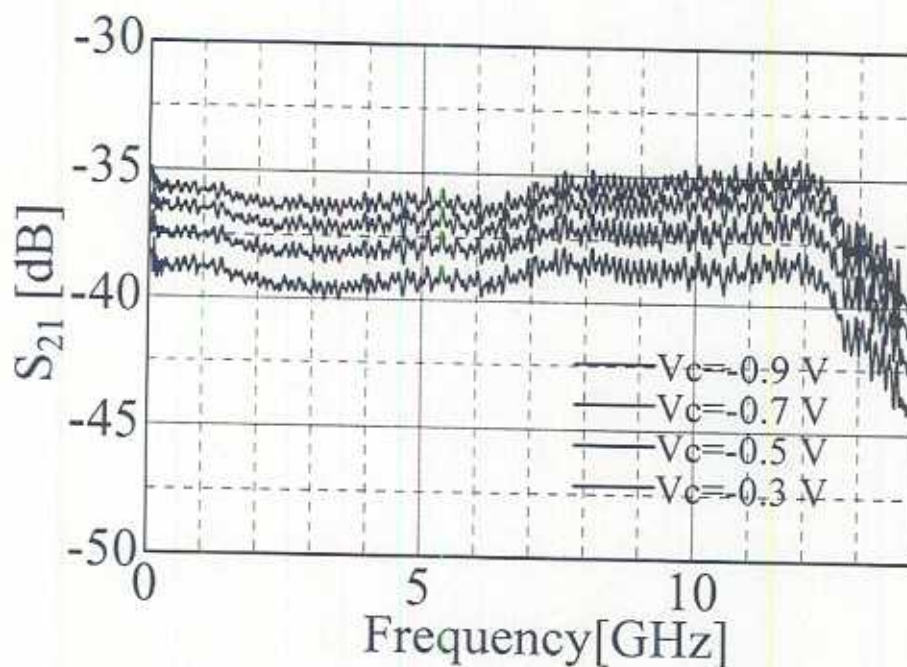

※ This accompanied data is for an evaluation sample.

Standard accompanied data for NX8560LJ-CC189 is to be discussed.

LASER DIODE TEST DATA

TYPE No. NX8560LJ-CC189

CLASS

K


Lot No. 0228Q

S/N 005

Inspected by



Parameter	Conditions	Value	Unit
I_{op}	-	60.0	mA
V_{mod}	-	2.0	V _{pp}
V_{center}	-	-1.2	V
I_m	@ I_{op}	143.6	μA
T_{set}	-	25.0	$^{\circ}C$
R_{th}	$T_L = T_{set}$	10	k Ω
$\langle PF \rangle$	$T_L = T_{set}$, On modulation	+3.7	dBm
λ_p	$T_L = T_{set}$, On modulation	1558.8	nm
RF-ER	$T_L = T_{set}$, On modulation (without Bessel filter)	10.8	dB
RF-ER	$T_L = T_{set}$, On modulation (with Bessel filter)	9.8	dB

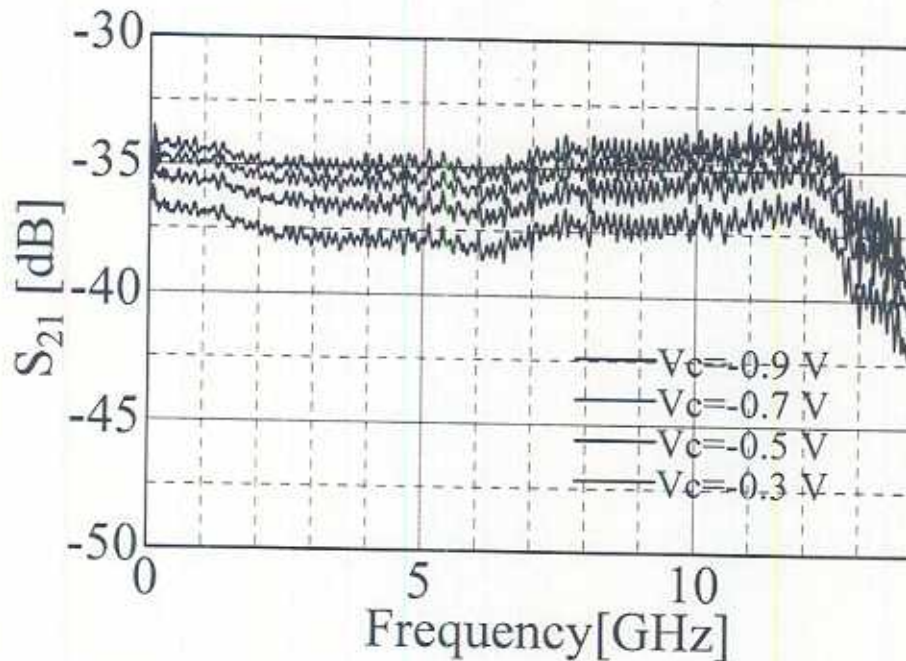

※ This accompanied data is for an evaluation sample.

Standard accompanied data for NX8560LJ-CC189 is to be discussed.

LASER DIODE TEST DATA

TYPE No. NX8560LJ-CC189

CLASS K


Lot No. 0228Q

S/N 014


Inspected by



Parameter	Conditions	Value	Unit
I _{op}	-	60.0	mA
V _{mod}	-	2.0	V _{pp}
V _{center}	-	-1.0	V
I _m	@I _{op}	297.3	μA
T _{set}	-	25.0	°C
R _{th}	TL=T _{set}	10	kΩ
<P _f >	TL=T _{set} , On modulation	-0.8	dBm
λ _p	TL=T _{set} , On modulation	1534.9	nm
RF-ER	TL=T _{set} , On modulation (without Bessel filter)	11.3	dB
RF-ER	TL=T _{set} , On modulation (with Bessel filter)	10.4	dB

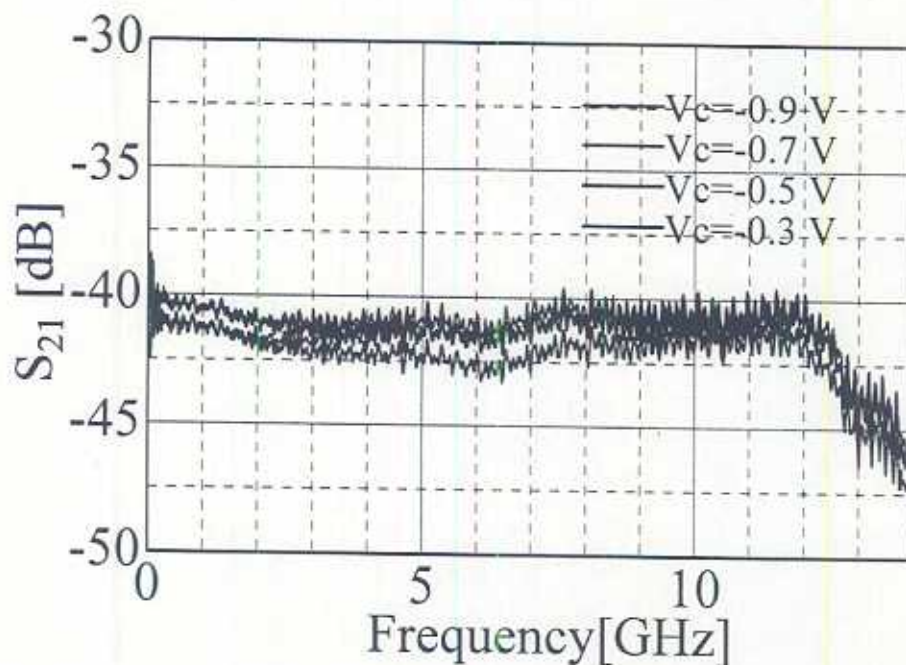

FAMILY LAYOUT

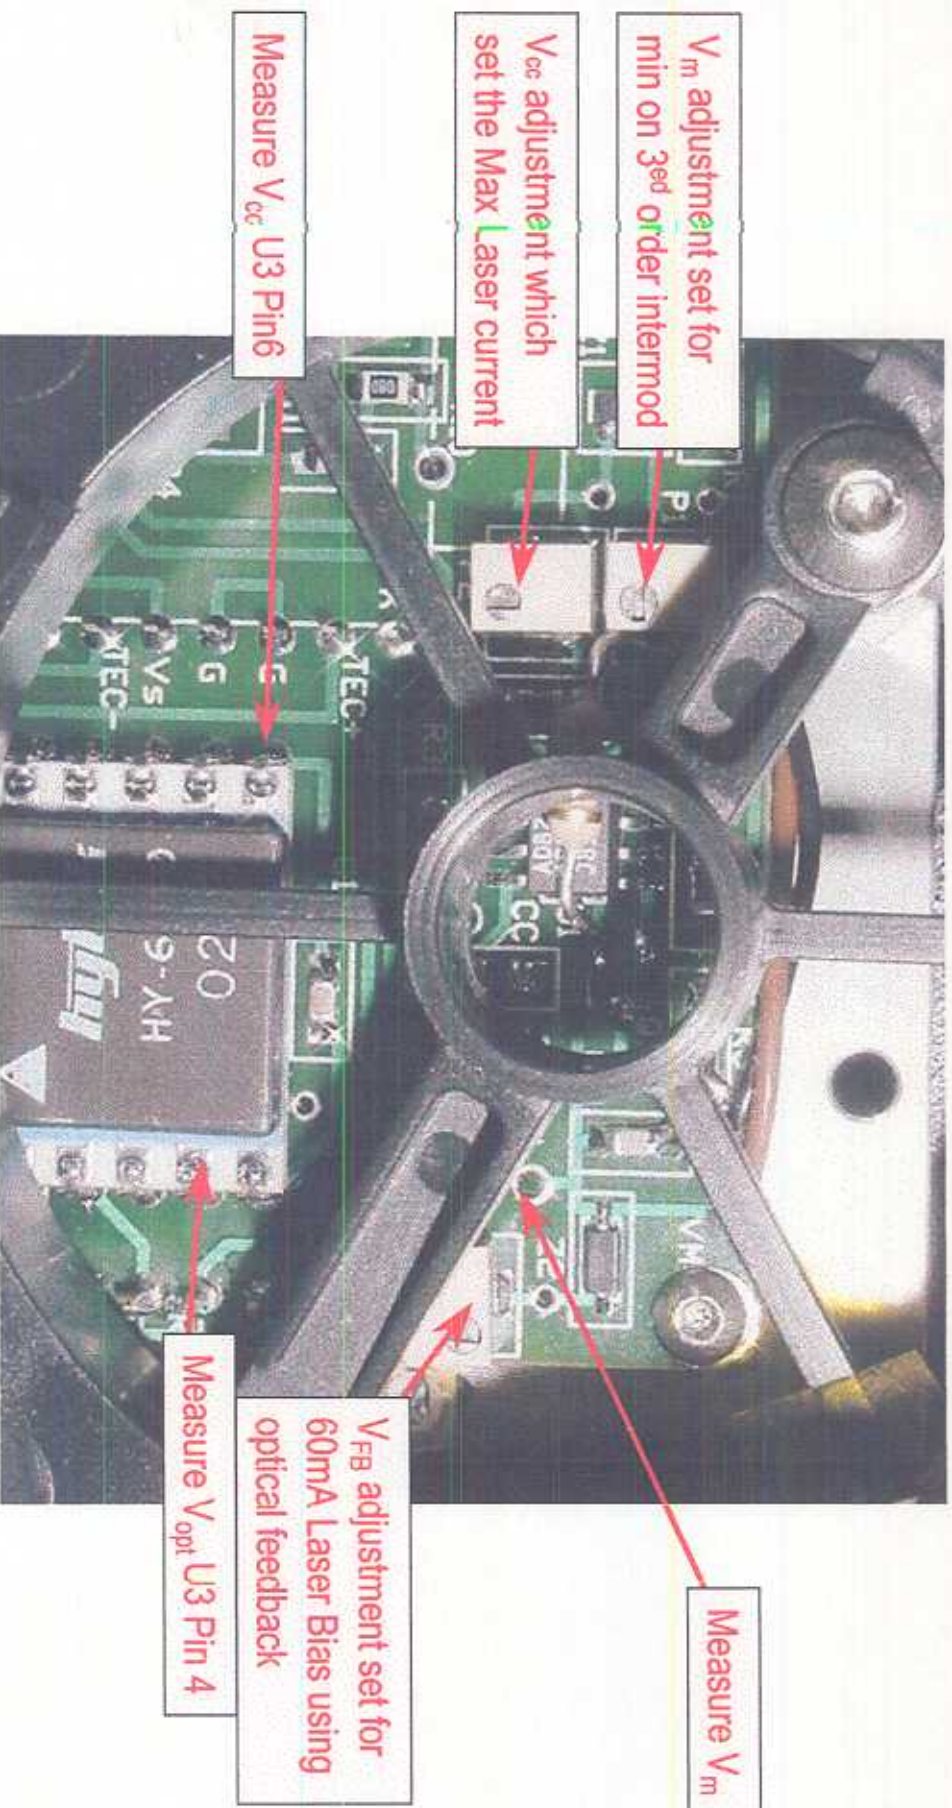

PHOTONICS Systems, Inc.

www.photonicsinc.com

SETI EAM Optical Link Data Sheet

EAM S/N# NEC 0228Q014

Detector S/N# Discovery 500378


Test Date 23-Oct 2002

Board # 002

Base plate # EAM002

Tested by HVR

Parameter	Conditions	Value	Units
$V_{opt}(U3\ Pin4)$	@ I_{op}	1.055	Volts
$V_{cc}(U3\ Pin6)$	For I_{max}	2.828	Volts
V_{mod}	3F @ min	-0.55	Volts
3F-F	5GHz@ -10dBm	77.27	dBc
I_{det}	@ I_{opt} $V_{det}=5V$	-1.1406	mA
I_{det} dark current	@ $I_{laser}=0\ mA$	0.0137	μA
λ	@ I_{op}	1547.0	nm
I_{op}	$R_{th}=10K$	60	mA

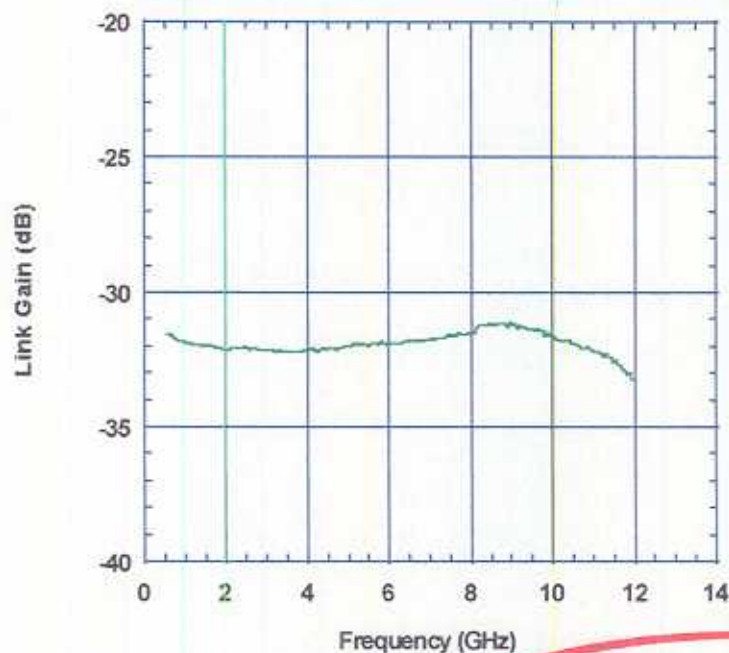

PHOTONICSSystems, Inc.™

www.photonicsinc.com

SETI EAM Optical Link Data Sheet

EAM S/N# NEC 0228Q003

Board # 003


Detector S/N# Discovery 500379

Base plate # EAM003

Test Date 24-Oct 2002

Tested by HVR

Parameter	Conditions	Value	Units
$V_{opt}(U3\ Pin4)$	@ I_{op}	2.111	Volts
$V_{cc}(U3\ Pin6)$	For I_{max}	4.17	Volts
V_{mod}	3F @ min	-0.713	Volts
3F-F	5GHz@ -10dBm	77.73	dBc
I_{det}	@ I_{opt} $V_{det}=5V$	1549.3	mA
I_{det} dark current	@ $I_{laser}=0\ mA$	0.0116	μA
λ	@ I_{op}	1547	nm
I_{op}	$R_{th}=10K$	60	mA

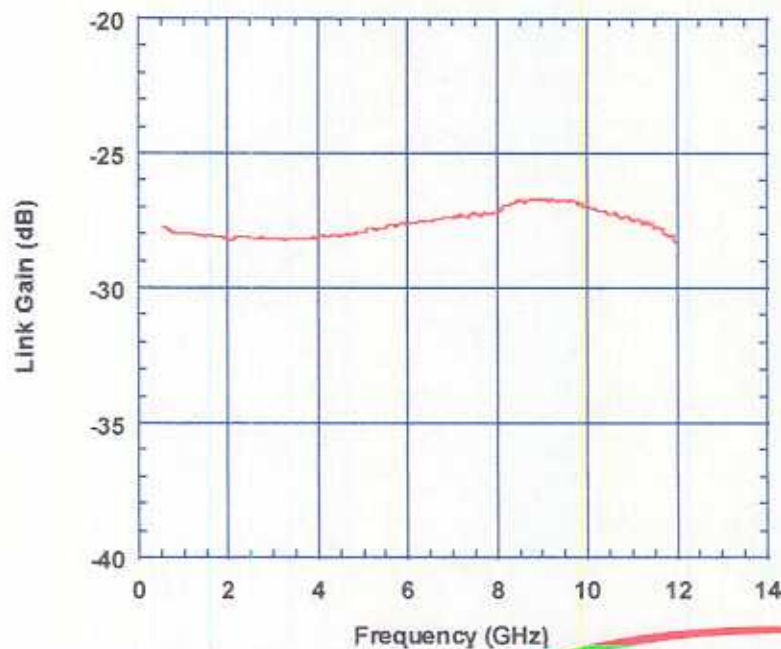

PHOTONICSSystems, Inc.™

www.photonicsinc.com

SETI EAM Optical Link Data Sheet

EAM S/N# NEC 0228Q002

Board # 004


Detector S/N# Discovery 500372

Base plate # EAM004

Test Date 23-Oct 2002

Tested by HVR

Parameter	Conditions	Value	Units
$V_{opt}(U3\ Pin4)$	@ I_{op}	1.054	Volts
$V_{cc}(U3\ Pin6)$	For I_{max}	2.817	Volts
V_{mod}	3F @ min	-.703	Volts
3F-F	5GHz@ -10dBm	67.25	dBc
I_{det}	@ I_{opt} $V_{det}=5V$	1.2054	mA
I_{det} dark current	@ $I_{laser}=0\ mA$	.00772	μA
λ	@ I_{op}	1547.0	nm
I_{op}	$R_{th}=10K$	60	mA

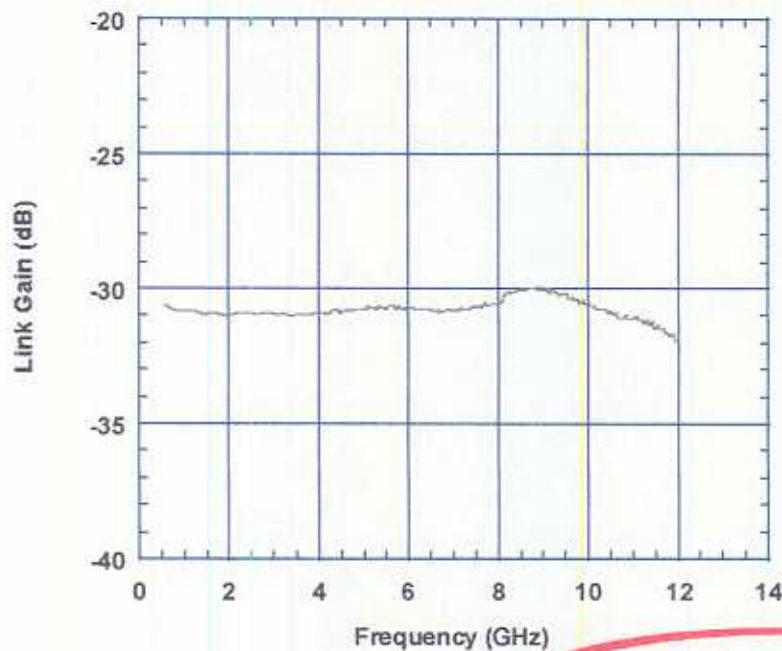

PHOTONICSSystems, Inc.™

www.photonicsinc.com

SETI EAM Optical Link Data Sheet

EAM S/N# NEC 0228Q005

Board # 005


Detector S/N# Discovery 500373

Base plate # EAM005

Test Date 23-Oct 2002

Tested by HVR

Parameter	Conditions	Value	Units
$V_{opt}(U3 \text{ Pin4})$	@ I_{op}	0.967	Volts
$V_{cc}(U3 \text{ Pin6})$	For I_{max}	2.725	Volts
V_{mod}	3F @ min	-0.737	Volts
3F-F	5GHz@ -10dBm	76.14	dBc
I_{det}	@ I_{opt} $V_{det}=5V$	2.9	mA
I_{det} dark current	@ $I_{laser}=0 \text{ mA}$	.00756	μA
λ	@ I_{op}	1558.8	nm
I_{op}	$R_{th}=10K$	60	mA

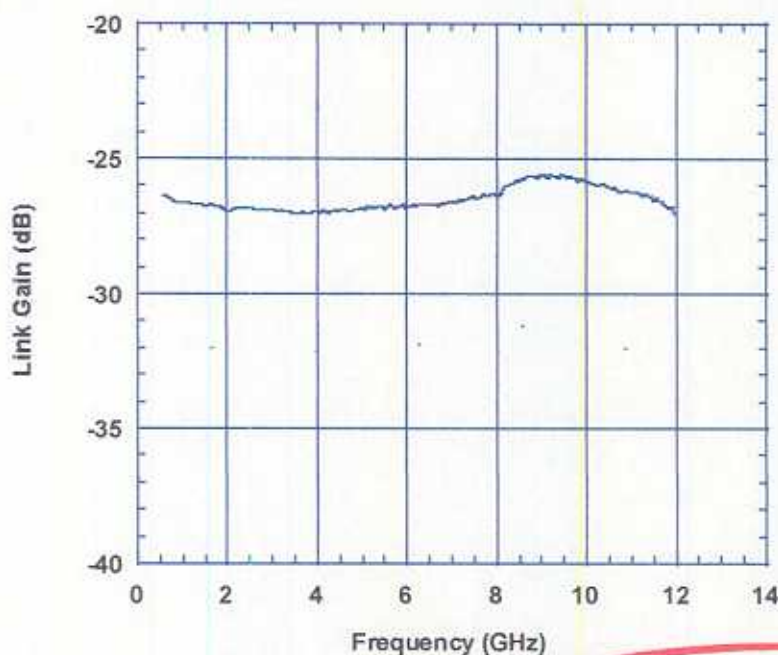

PHOTONICSSystems, Inc.™

www.photonicsinc.com