



# Accelerometer

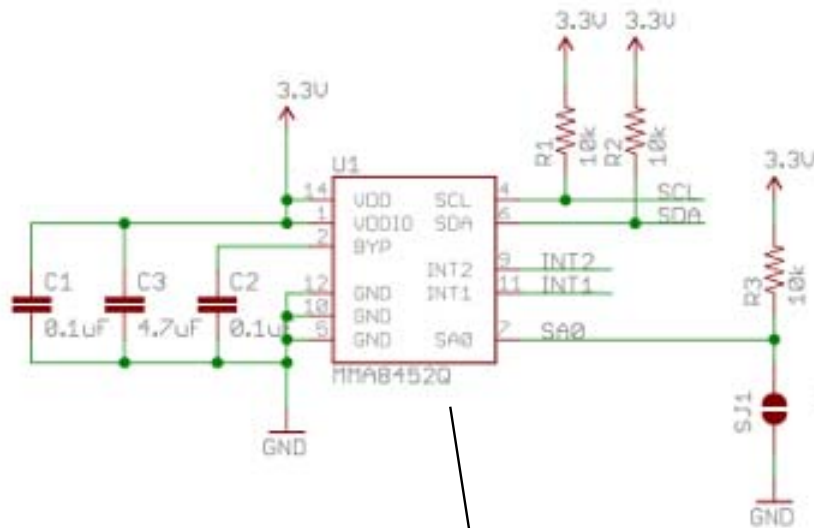

Jumper open by default, so SA0 = 1

I2C Address:  
SA0 = 0: 0x1C  
SA0 = 1: 0x1D

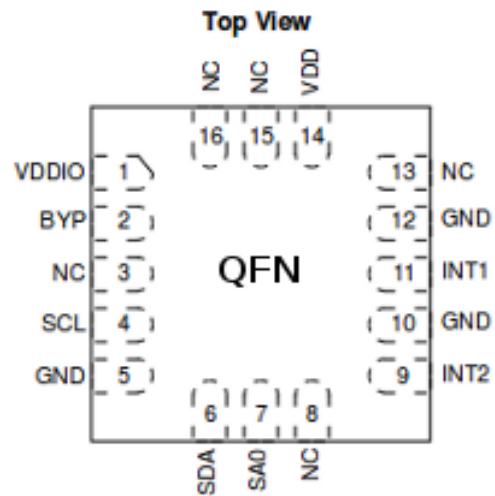