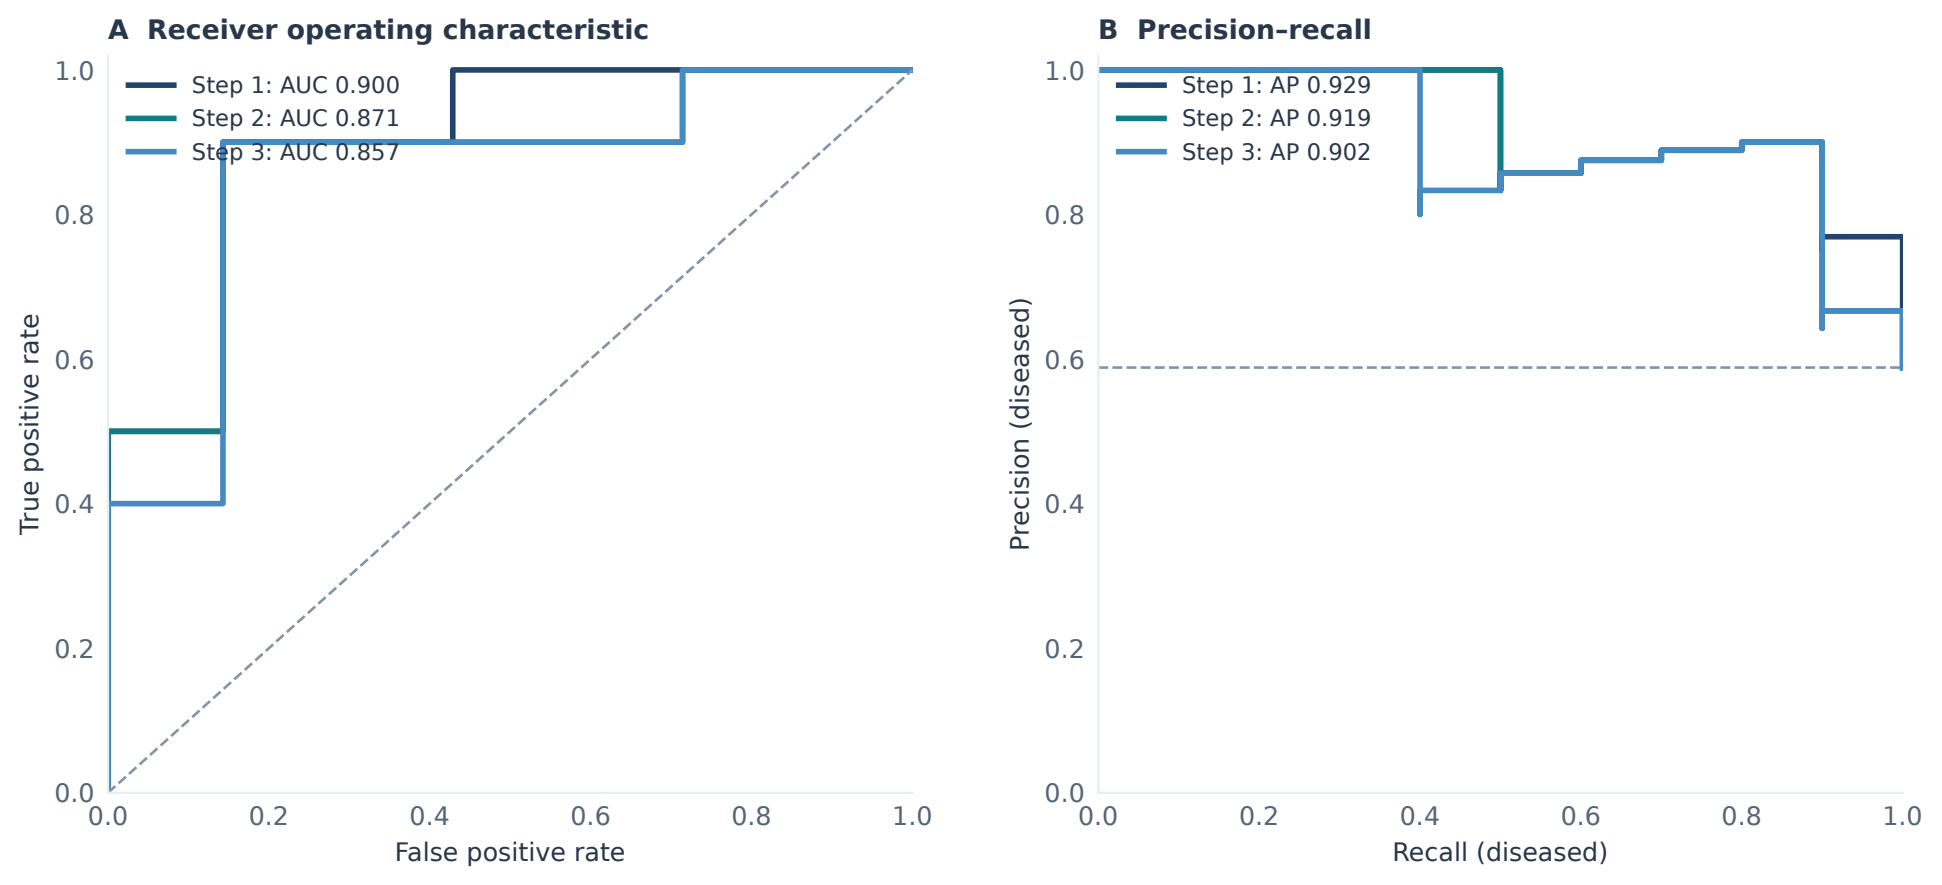
A Receiver operating characteristic
Step 1: AUC 0.900
Step 2: AUC 0.871
Step 3: AUC 0.857
True positive rate
False positive rate
0.0
0.2
0.4
0.6
0.8
1.0
B Precision–recall
Step 1: AP 0.929
Step 2: AP 0.919
Step 3: AP 0.902
Precision (diseased)
Recall (diseased)