




TYPICAL DETAILS OF SPECIAL CONFINING  
REINFORCEMENT  
FOR BEAM RESTING ON COLUMN AT BOTH ENDS

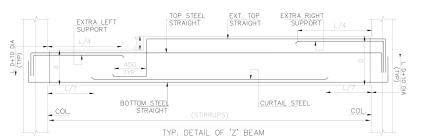

TYPICAL DETAILS OF SPECIAL CONFINING REINFORCEMENT REQUIREMENT FOR BEAM REINFORCEMENT

| SLAB MARKED | THICK. | TYPE    | REINFORCEMENT             |                           | REMARKS         |
|-------------|--------|---------|---------------------------|---------------------------|-----------------|
|             |        |         | SHORT BAR                 | LONG BAR                  |                 |
| S2          | 125    | TWO WAY | T10@900/C7<br>ALL BENT UP | T10@900/C7<br>ALL BENT UP | —               |
| S3          | 125    | TWO WAY | T10@900/C7<br>ALL BENT UP | T10@900/C7<br>ALL BENT UP | —               |
| S4          | 125    | TWO WAY | T10@900/C7<br>ALL BENT UP | T10@900/C7<br>ALL BENT UP | 250MM SUNK SLAB |
| S5          | 115    | ONE WAY | T10@900/C7<br>ALL BENT UP | T10@900/C7<br>ALL BENT UP | —               |
| S6          | 115    | ONE WAY | T10@900/C7<br>ALL BENT UP | T10@900/C7<br>ALL BENT UP | —               |
| S7          | 175    | TWO WAY | T10@900/C7<br>ALL BENT UP | T10@900/C7<br>ALL BENT UP | —               |
| S1          | 225    | ONE WAY | T10@900/C7<br>(NONE)      | T10@900/C7<br>(NONE)      | STAIRCASE SLAB  |