



(a) 径向温度

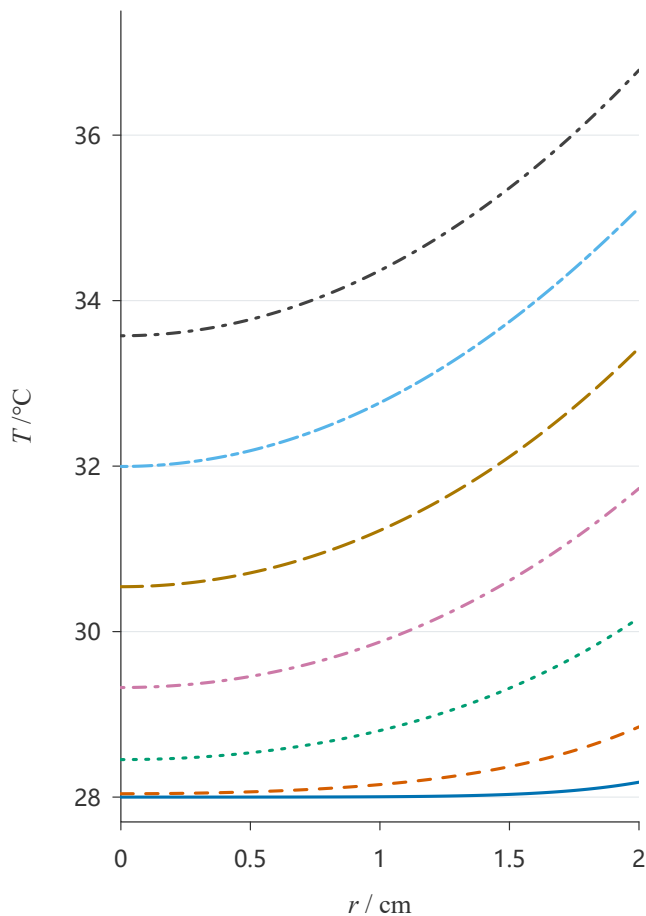


(b) 径向干基含水率

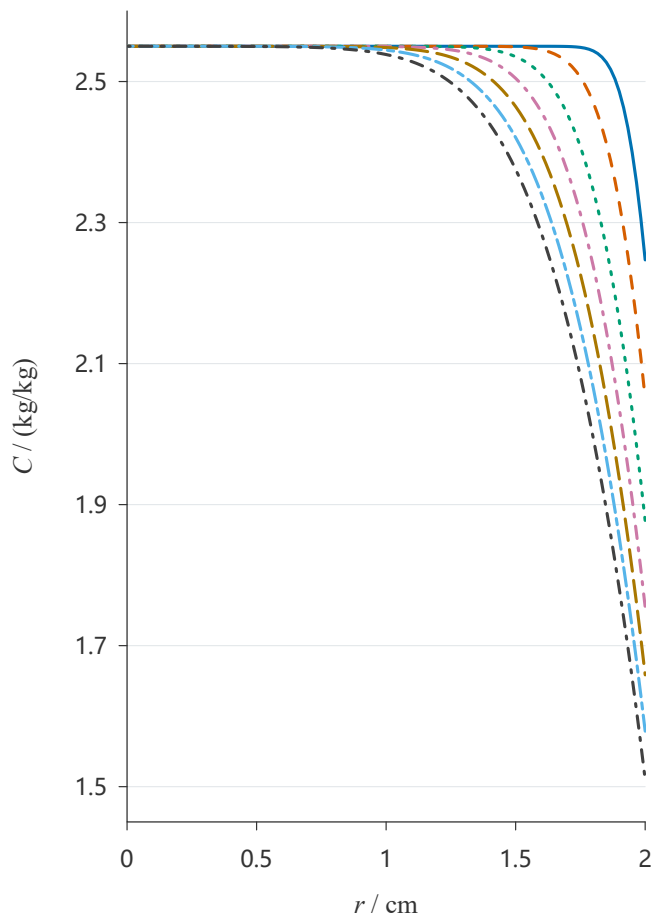


时间 / s

— 100 - - 300 ··· 600 - · - 900 - - - 1200 - - - 1500 - · - · 1800


(a) 0–4 h: 环境温度

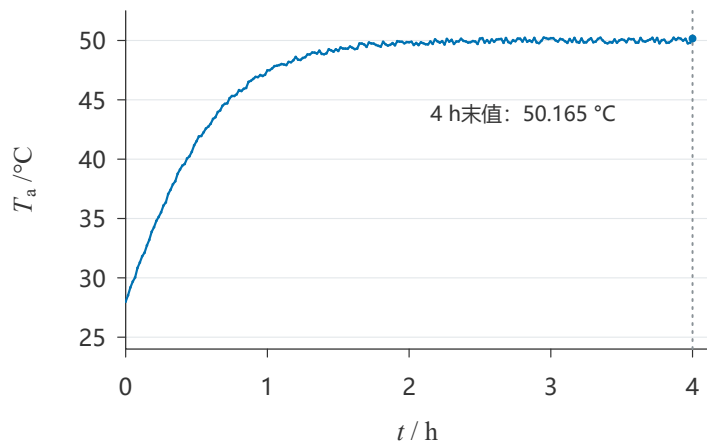


(b) 延拓至 60 h

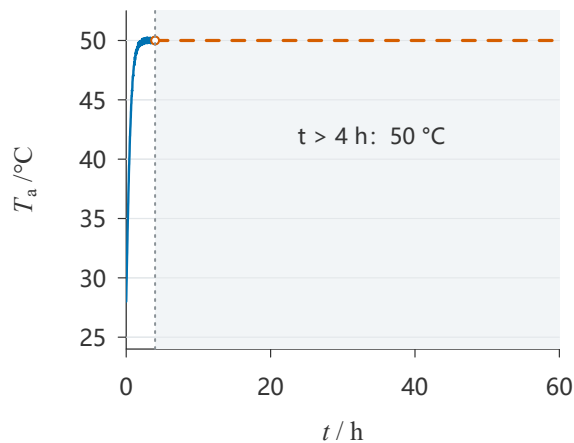

(c) 0–4 h: 空气水分指标

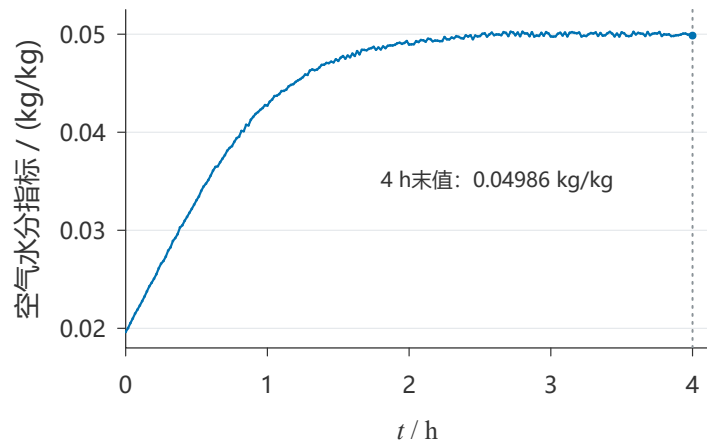


(d) 延拓至 60 h

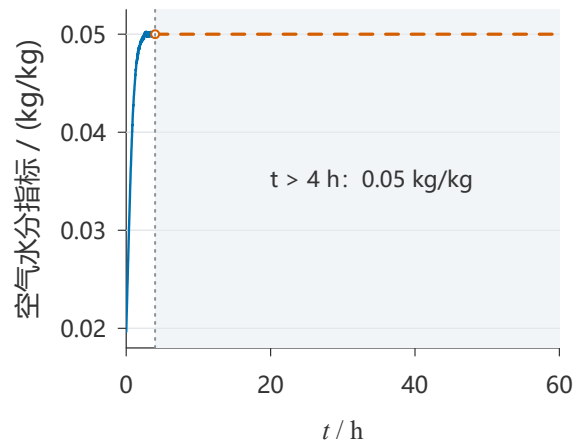


—●— 观测及分段线性插值 - - -○- - - 假设平台 (左端开放)

(a) 前 4 h 的温度响应

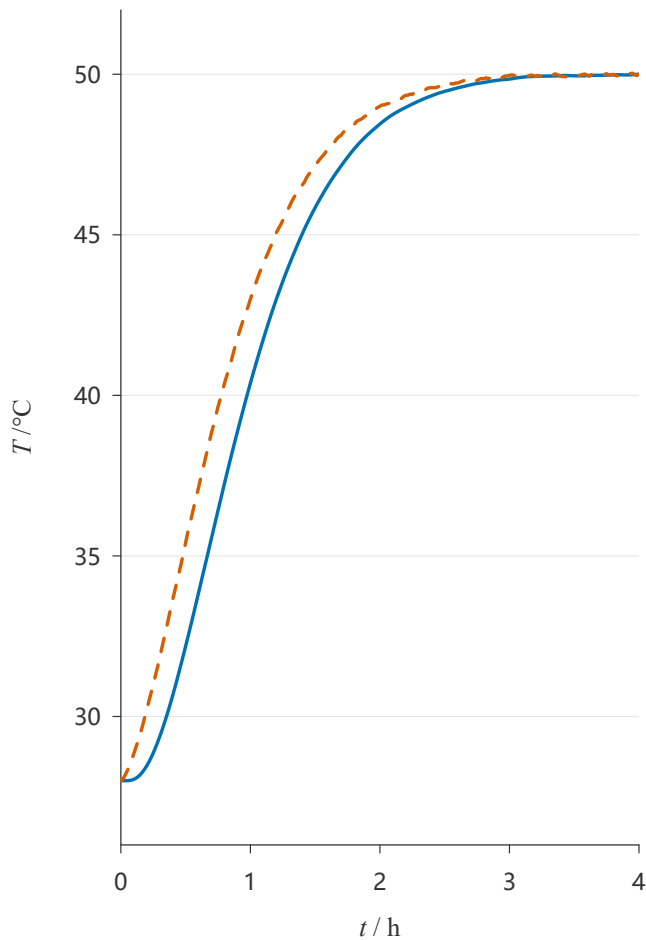


(b) 全过程干基含水率

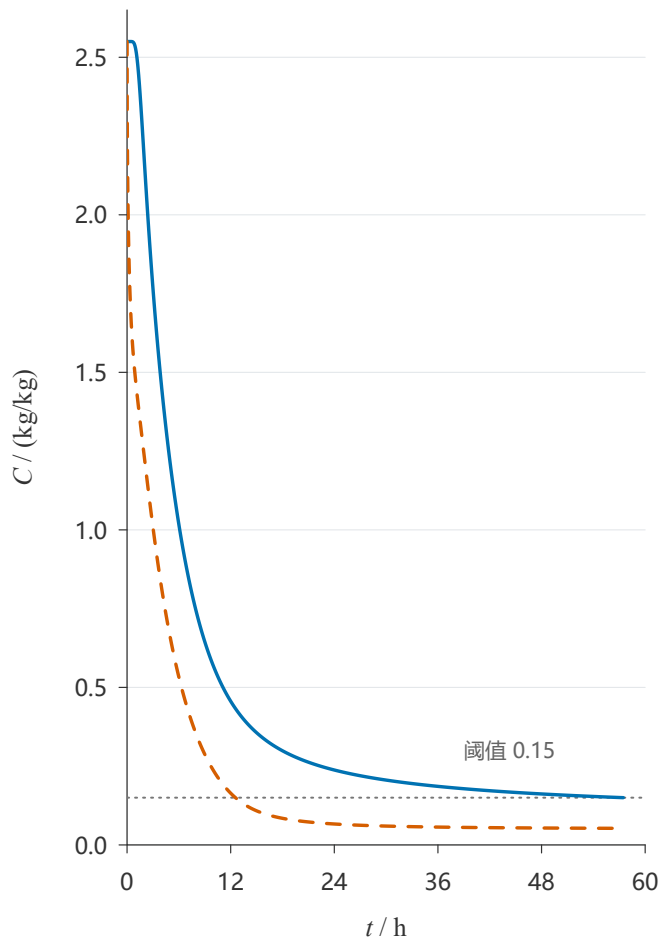


— 中心 ($r = 0$)

- - - 表面 ($r = 2 \text{ cm}$)


(a) 达标过程 (对数刻度)

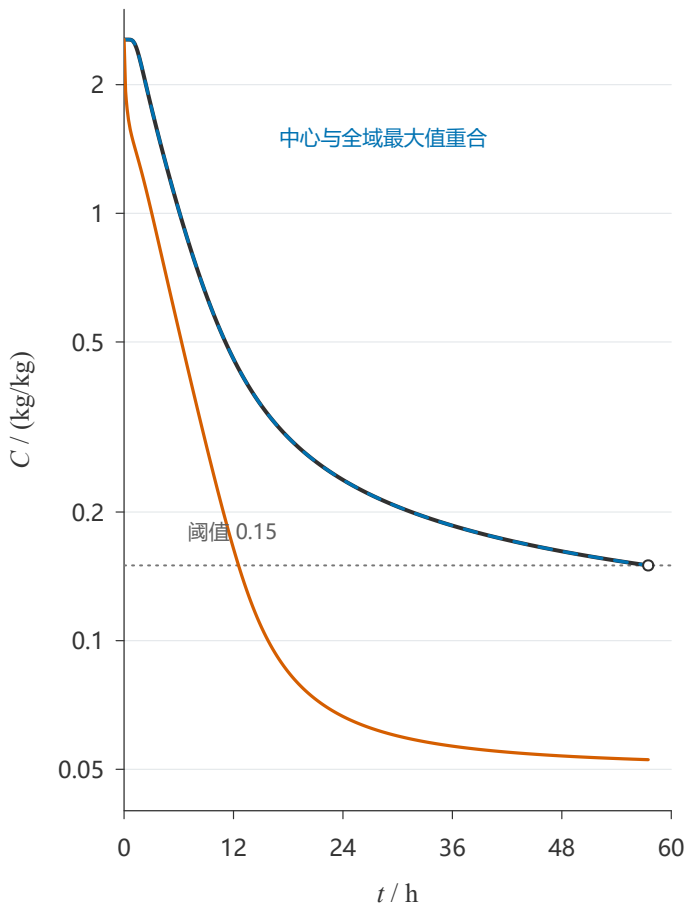

(b) 临界时刻附近

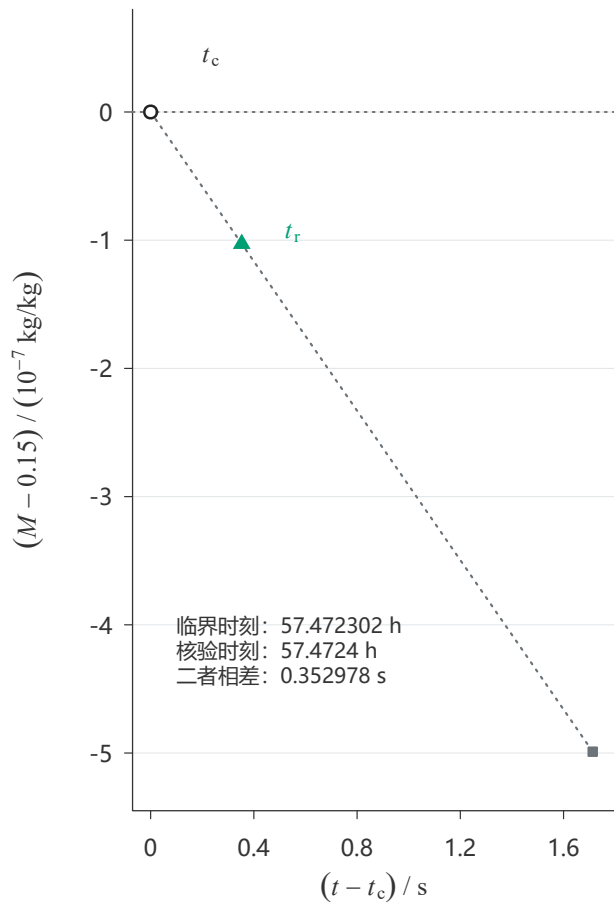


(a) 收缩半径与选定时刻

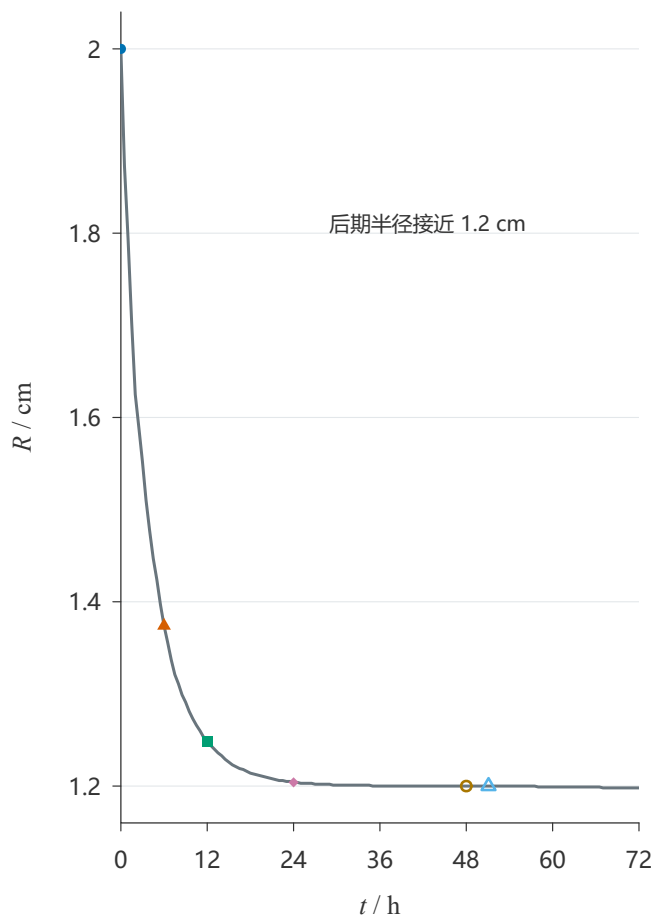


—●— 0 h
—▲— 6 h
—■— 12 h
—◆— 24 h

(b) 含水率 (对数刻度)

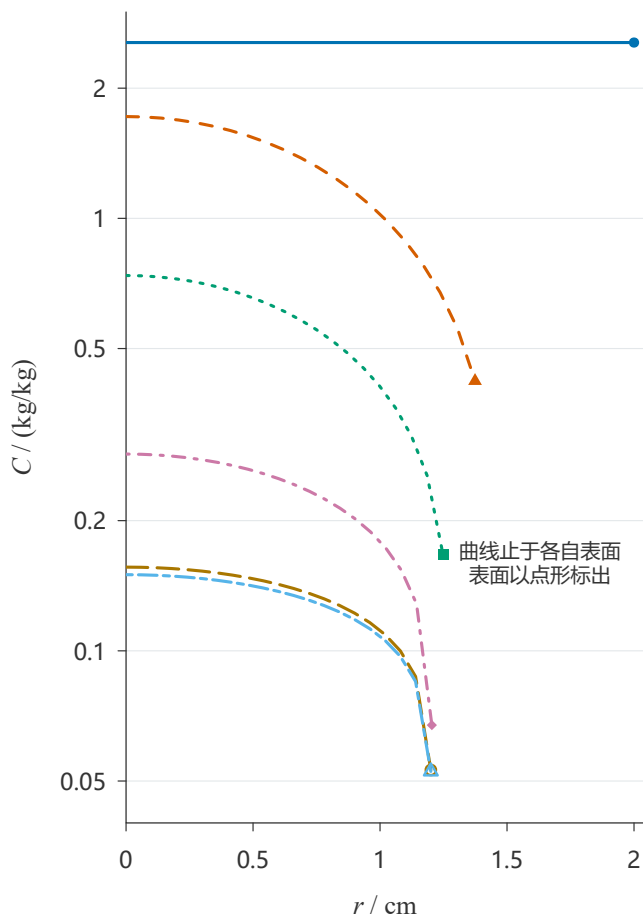

—○— 48 h
—△— 临界 51.090575 h

经验边界阻力情景下的临界时长

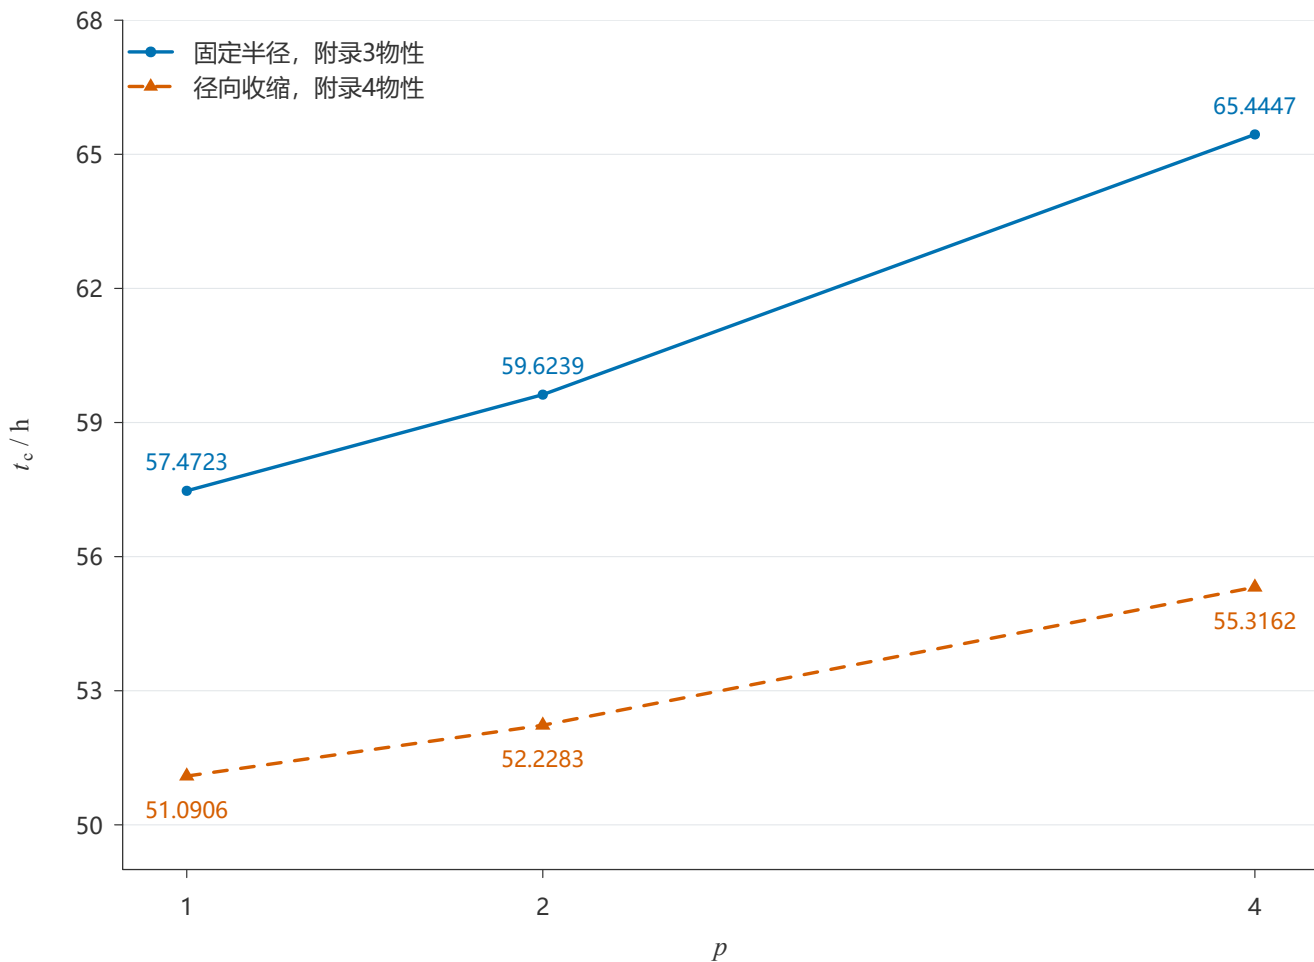

统一采用 N = 800、零潜热负荷; 该经验参数族未经实测等温线标定。