

## ELECTRICAL SPECIFICATION

IS:9431-1979

- 1) Rated Voltage.....22 kV.
- 2) Dry Power Frequency Withstand Voltage Test (One Minute).....50 kV.
- 3) Dry Lightning Impulse Withstand Voltage Test .....125 kVpeak.
- 4) Minimum Creepage Distance.....310 mm.


## MECHANICAL SPECIFICATION

IS:9431-1979

- 1) Cantilever Failing Load F.....1000 Kgs.
- 2) Compression Failing Load .....8000 Kgs.
- 3) Tensile Failing Load .....3000 Kgs.

OTHER :-

- 1) Colour brick red.

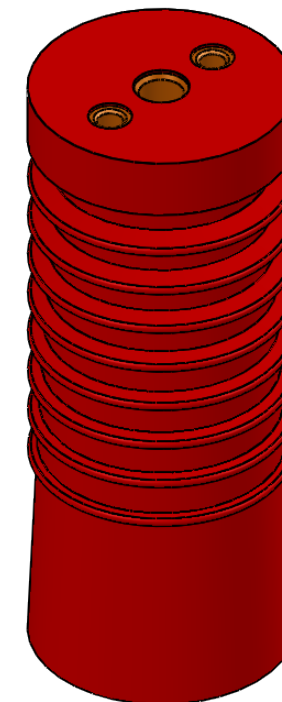

THE COPYRIGHT OF THESE DRAWINGS AND OF ALL ANNEXES WHICH ARE ENTRUSTED TO A PERSON'S CARE ALWAYS REMAIN THE PROPERTY OF OUR FIRM. THEY MUST NOT BE COPIED OR DUPLICATED. NOT SHOWN TO OR PLACED AT THE DISPOSAL OF THIRD PERSONS WITHOUT OUR WRITTEN CONSENT.


REV.	MODIFICATION	DATE	APPD

22kV Epoxy Insulator

MANUFACTURER  
**SUNSHINE ENGINEERING**

Email :- sunshineengineering23@gmail.com  
Mob. :- +91 7499544230

All dimensions are in mm

SCALE	NTS	REF. H-0008	
DRG	UKN	PROJECTION	
CHD	Pitale		
APPD	Pitale		
DATE	10/04/22		
		Drawing No.	Rev.
		SE/EI22/001	