

	ITEM NO.	RATING	RATING A	
	1	250 AMP.	30	6
	2	2 400 AMP.		10
3 500 t0 630 A		500 t0 630 AMP.	40	10

## ELECTRICAL SPECIFICATION

IEC: 60137:2017


- 1) Rated Voltage......1.1kV.
- 2) Dry Power Frequency Withstand Voltage Test (One Minute)......10kV.

## OTHER:-

- 1) End Copper Palm Will be Electrotinned 12 to 15 Microns.
- 2) Electroytic Copper With High Electrical Conductivity.
- 3) Colour brick red.

THE COPYRIGHT OF THESE DRAWINGS AND OF ALL ANNEXES WHITCH ARE ENTRUSTED TO A PERSON'S CARE ALWAYS REMAIN THE PROPERTY OF OUR FIRM. THEY MUST NOT BE COPIED OR DUPLICATED.NOT SHOWN TO OR PLACED AT THE DISPOSAL OF THIRD PERSONS WITHOUT OUR WRITTEN CONSENT.

. MODIFICATION	DATE	APPD	
	MODIFICATION	MODIFICATION DATE	MODIFICATION DATE APPD

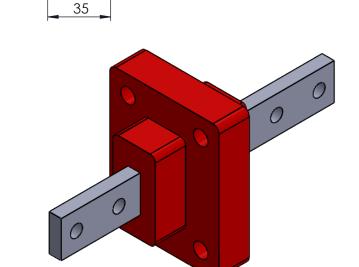

90±1 60±0.5

1.1kV Epoxy Bush	ing
------------------	-----

92

(+)

MANUFACTURER
SUNSHINE ENGINEERING

Email :- sunshineengineering23@gmail.com Mob. :- +91 7499544230

All dimensions are in mm						
SCALE	NTS	REF.				
DRG	UKN	PROJECTION				
CHD	Pitale	· 🗐 🕀				
APPD	Pitale	Drawing No.	Rev			
DATE	18/08/22	SE/EB01/003				

4, HOLES ∅12