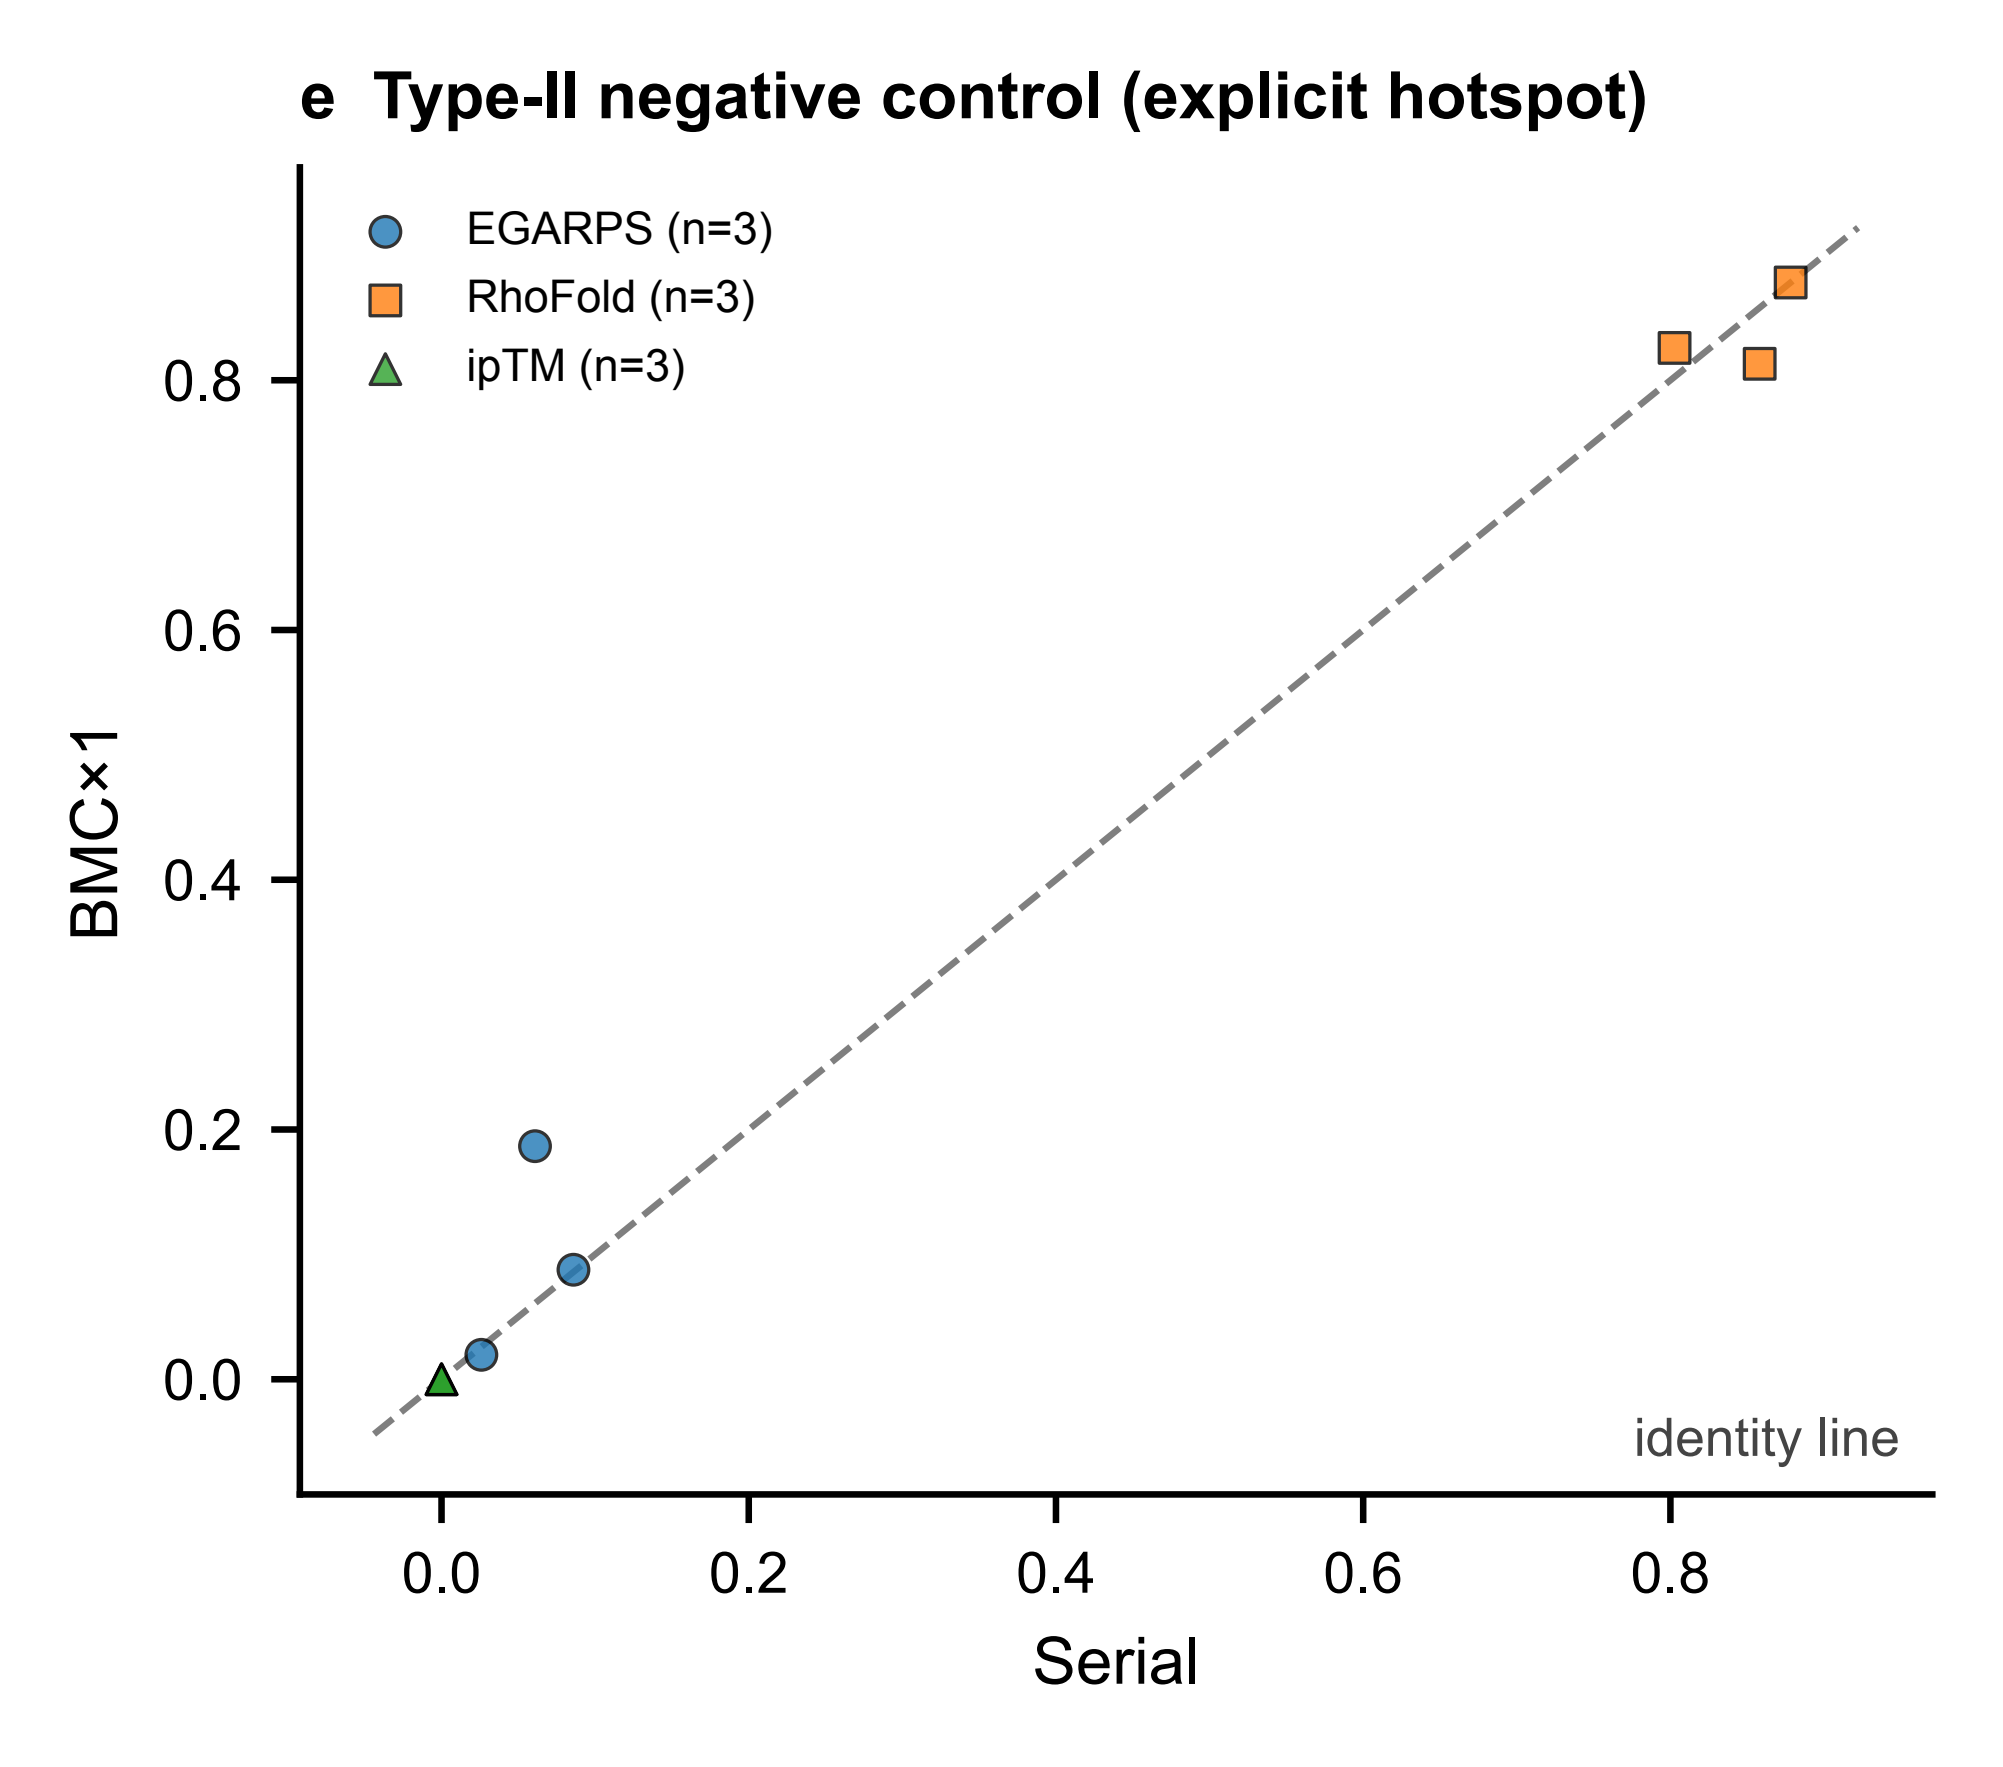
e Type-II negative control (explicit hotspot)
EGARPS (n=3)
RhoFold (n=3)
ipTM (n=3)
BMC×1
Serial
identity line
0.0
0.2
0.4
0.6
0.8