


AMSFF DB: Unix/Linux Data Structure

THE ART OF ENGINEERING,
AMPLIFIED

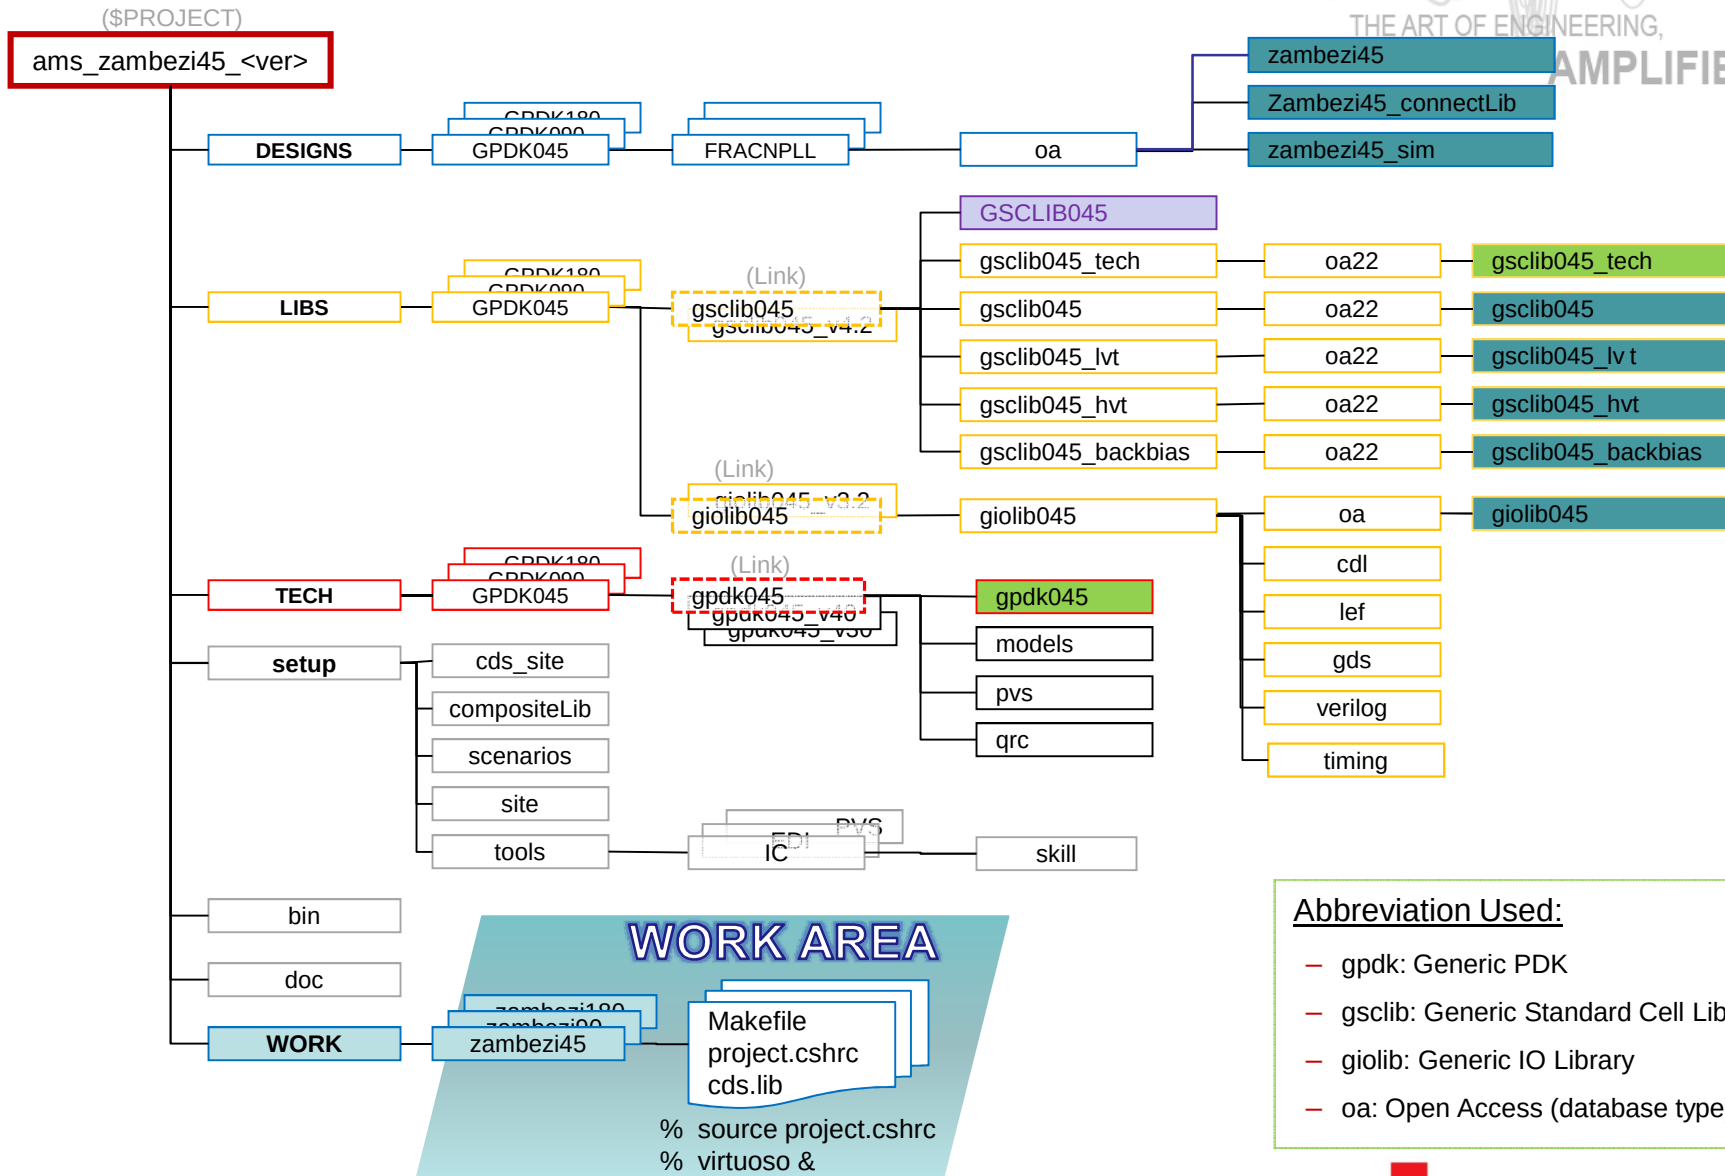


Abbreviation Used:

- gpdk: Generic PDK
- gsclib: Generic Standard Cell Library
- giolib: Generic IO Library
- oa: Open Access (database type)

AMSFF DB: Virtuoso Library Binding

THE ART OF ENGINEERING,
AMPLIFIED

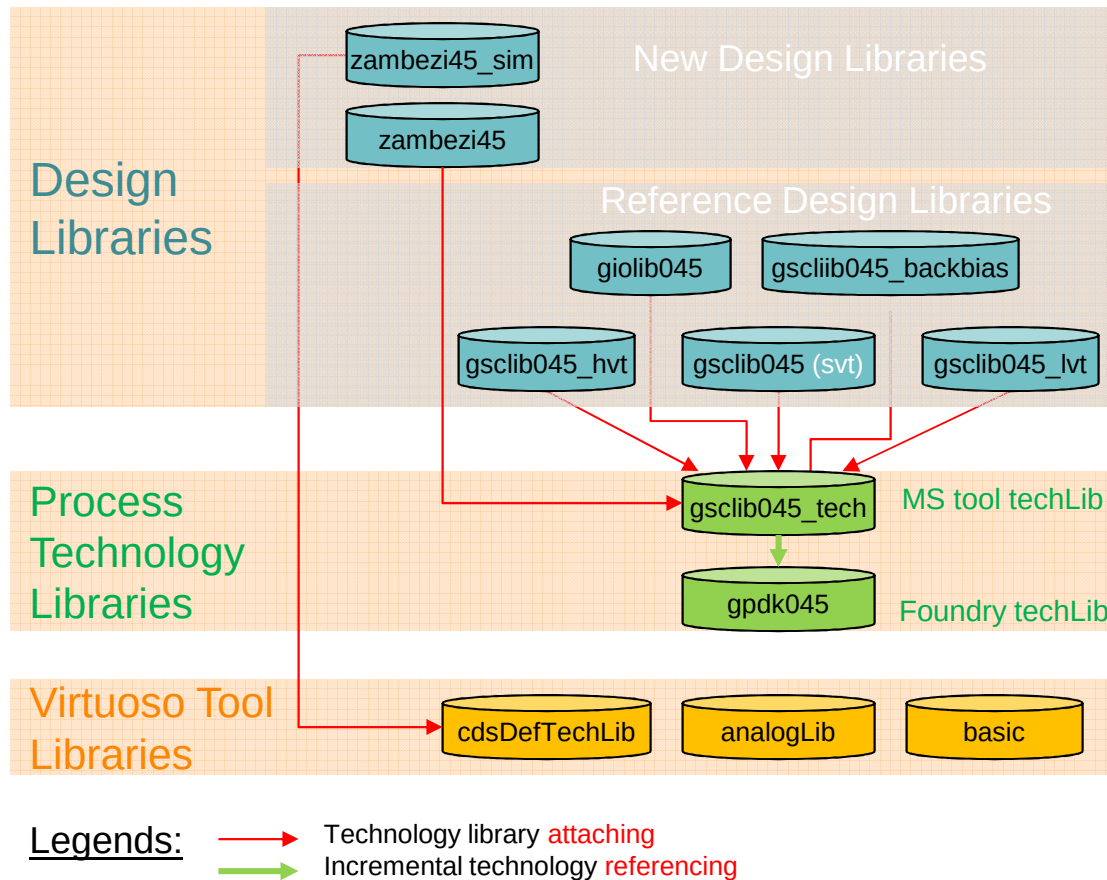

Legends:

- Technology library attaching
- Incremental technology referencing

Info: For detail of two library binding types (**Attach** and **Reference**), see FAQs slide

Notes:

- MS tool techLib contents:
 - refTechLibs() for ITDB
 - Custom via defs (P&R)
 - Constraint groups for P&R
 - Site definitions
 - Layout-XL CG
 - Design project CG
- Foundry techLib contents:
 - Layer and display definitions
 - Basic process constraints
 - Standard via definitions
 - Device, path, and guarding definitions
- Abbreviation Used:
 - gpdk: Generic PDK
 - gsclib: Generic Std. Cell Lib
 - giolib: Generic IO Library
 - hvt: High Vt, lvt: Low Vt

AMSFF DB In Virtuoso Library Manager

The screenshot shows the Cadence Virtuoso Library Manager interface. The title bar indicates the directory path: ...A/WA_rayv/AMSFF/WORK/zambezi45. The menu bar includes File, Edit, View, Design Manager, DB Linter, and Help. The Cadence logo is in the top right corner.

Below the menu bar, there are two checkboxes: ☒ Show Categories and ☐ Show Files.

The interface is divided into four main panes:

- Library:** A tree view showing the hierarchy of libraries. The 'zambezi45' library is selected, and its contents are listed, including 'Cadence_IC', 'US_8ths', 'analogLib', 'basic', 'cdsDefTechLib', 'sample', 'FracN_PLL_45', 'zambezi45', 'zambezi45_connectLib', 'zambezi45_sim', 'GSLIB045', 'gsclib045', 'gsclib045_backbias', 'gsclib045_hvt', 'gsclib045_lvt', 'gsclib045_tech', 'giolib045', and 'gpdk045'.
- Category:** A list of categories under 'Chip_LowPower'. The 'Chip_LowPower' category is selected, and its contents are listed, including 'Everything', 'Uncategorized', 'Chip_LowPower', 'CustomDigitalBlocks', 'Layout', 'Top', 'TopSubBlocks', 'atb', 'caps', 'cp', 'dft', 'div', 'lf_lpf', 'ls', 'pfd', 'pll_dig', 'reg', 'sheets', and 'vco'.
- Cell:** A list of cells under 'LP_pll_chip'. The 'LP_pll_chip' cell is selected, and its contents are listed, including 'LP_pll', 'LP_pll_ET', 'LP_pll_chip', 'LP_pll_chip_ET', 'LP_pll_chip_g', 'LP_pll_dig', 'LP_pll_dig_combo', 'LP_pll_dig_combo_WS', 'LP_pll_dig_combo_WSb', 'LP_pll_dig_combo_g', 'LP_pll_dig_wSPI', 'LP_pll_dig_wSPI_WSb', 'LP_pll_dig_wSPI_ls', 'LP_pll_g', 'LP_pll_ls_dvdd2avdd', 'LP_pll_ls_dvdd2avddh', 'LP_pll_ls_porh', 'Rx_refclk', 'clk_gate', 'combo_pad', 'comp_os', 'input_diff_pad_rx', 'pll_bypchf_WS', 'pll_bypclif_WS', 'power_manager', 'spi', 'test_control', 'test_receiver', and 'test_receiver_pn'.
- View:** A table showing the view details for the selected cell. The table has columns for View, Lock, and Size.

View	Lock	Size
✓ Info_pin_package		4k
✓ constraint		32
✓ layout		535k
✓ layout_fills		65.7M
✓ layout_metalFilled		18k
✓ layout_place		528k
✓ layout_place1		450k
✓ layout_place2		527k
✓ layout_routed		561k
✓ physConfig		243
✓ schematic		63k
✓ symbol		36k