ESC Foxeer Reaper F4 128K 65A BL32 4in1
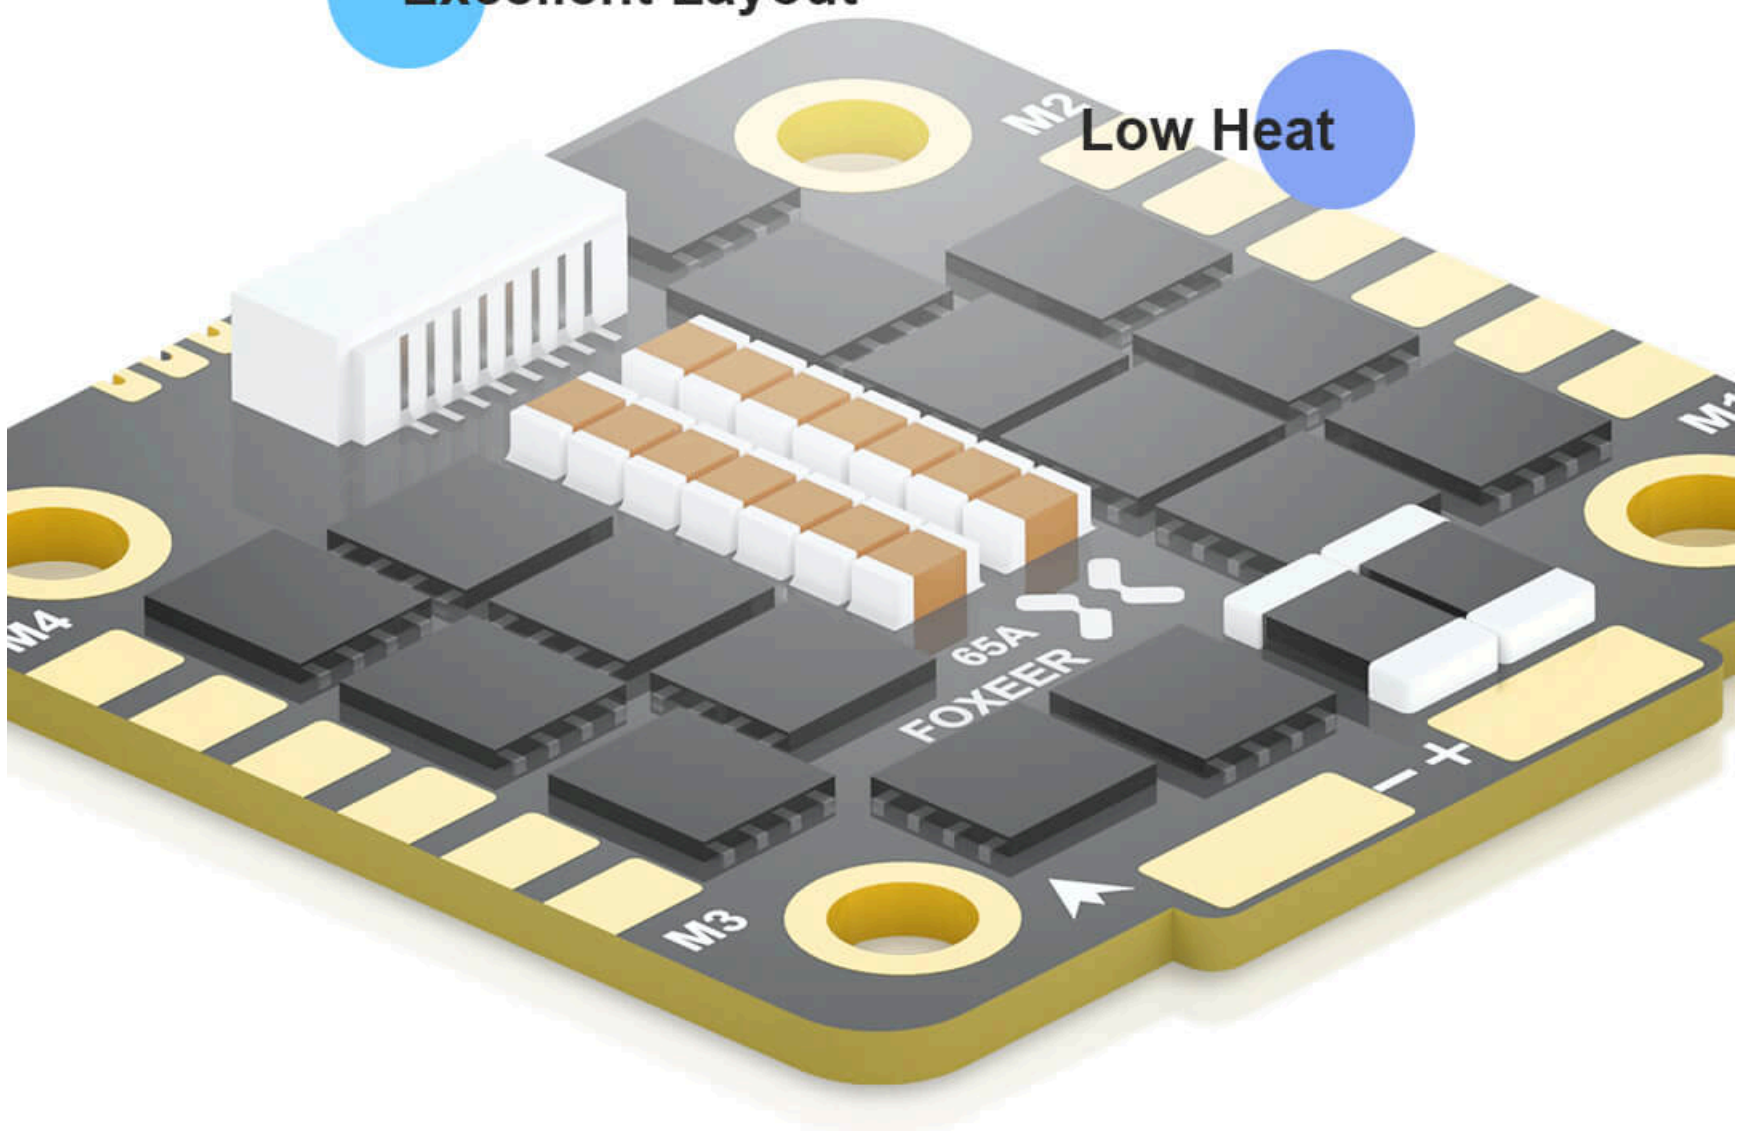
REAPER F4

65A 128K

65A Persistent/100A Peak

High Quality Import Mosfet
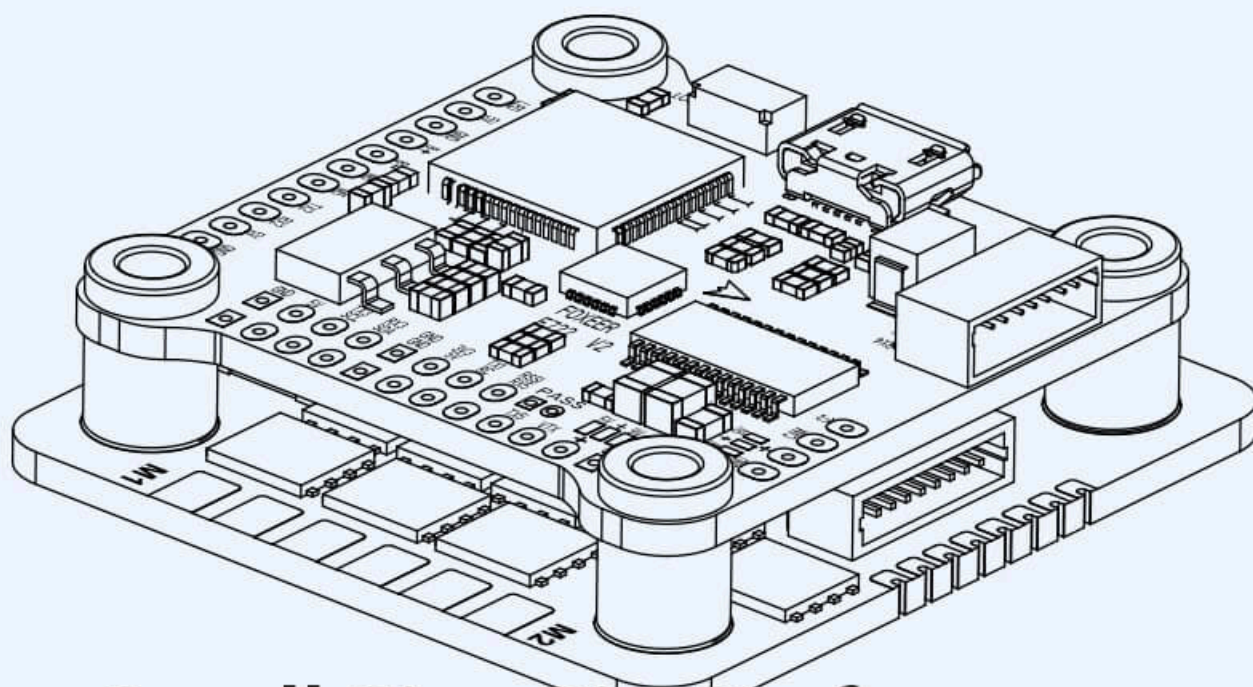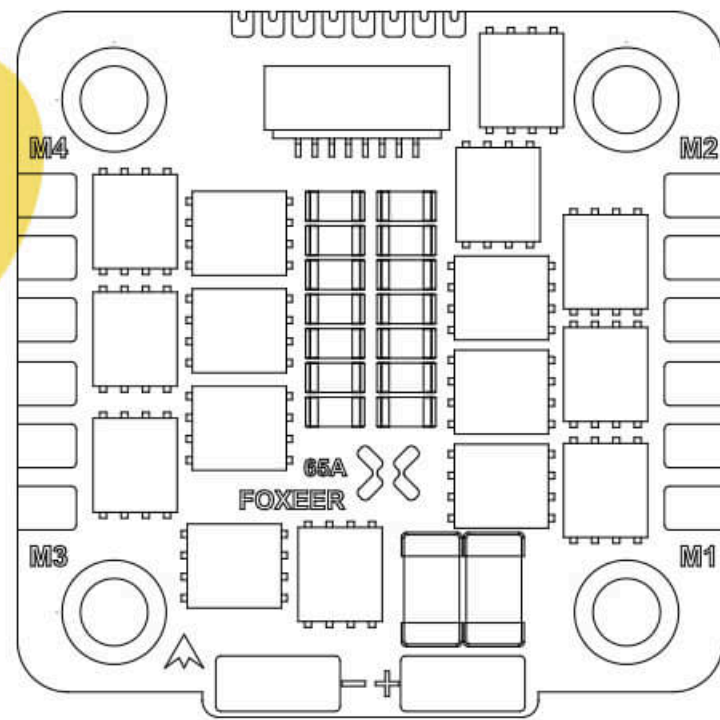
Excellent Layout

Low Heat

Say No
to Desync

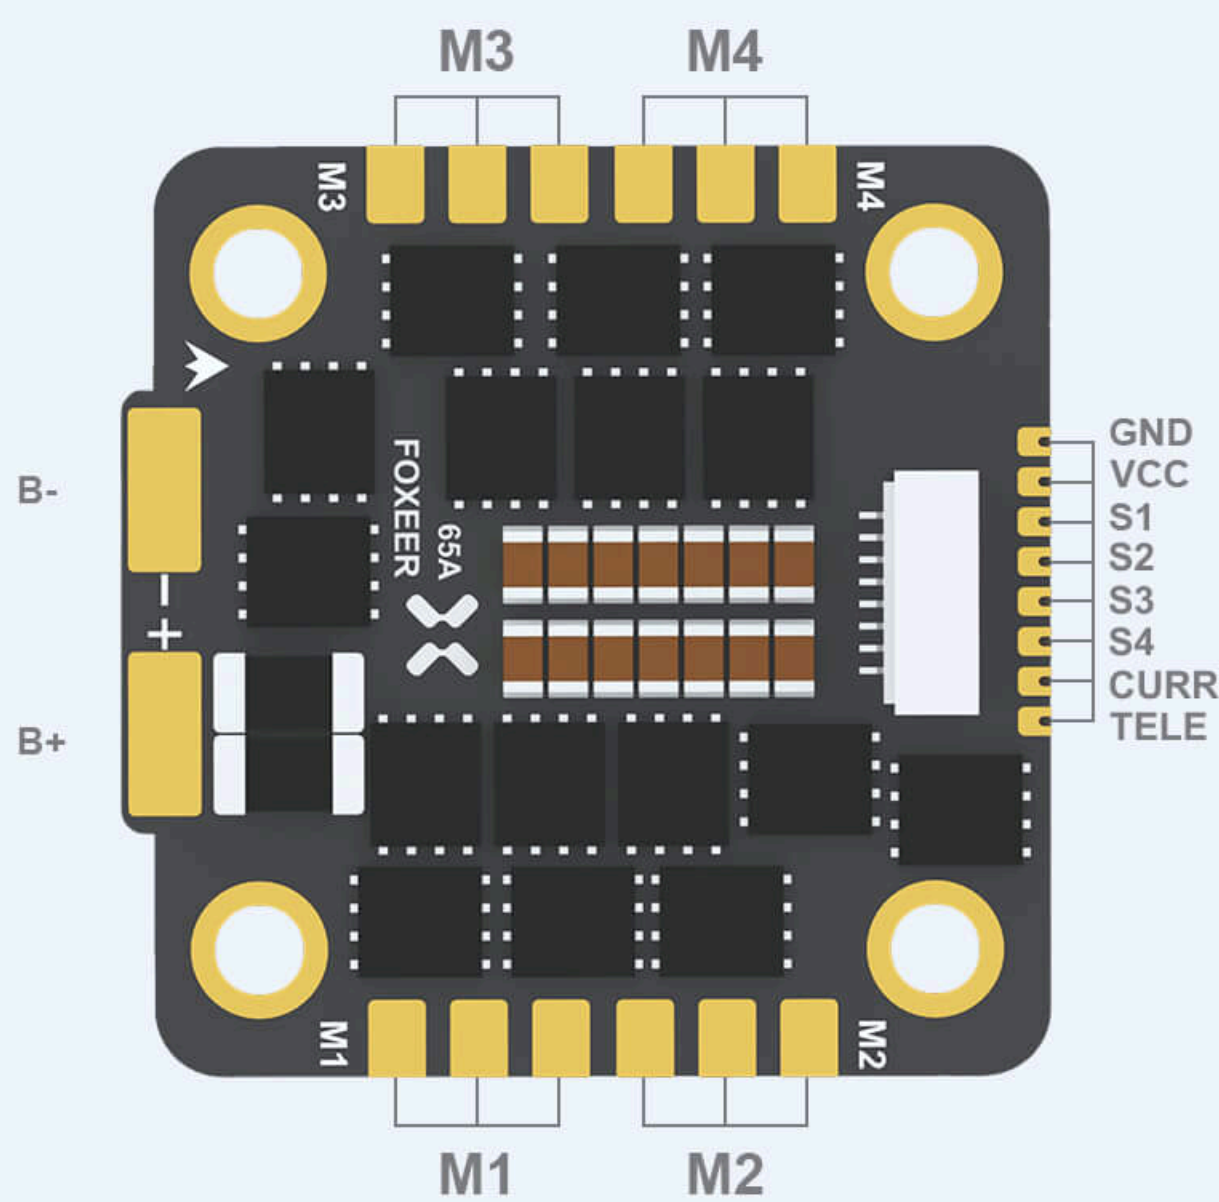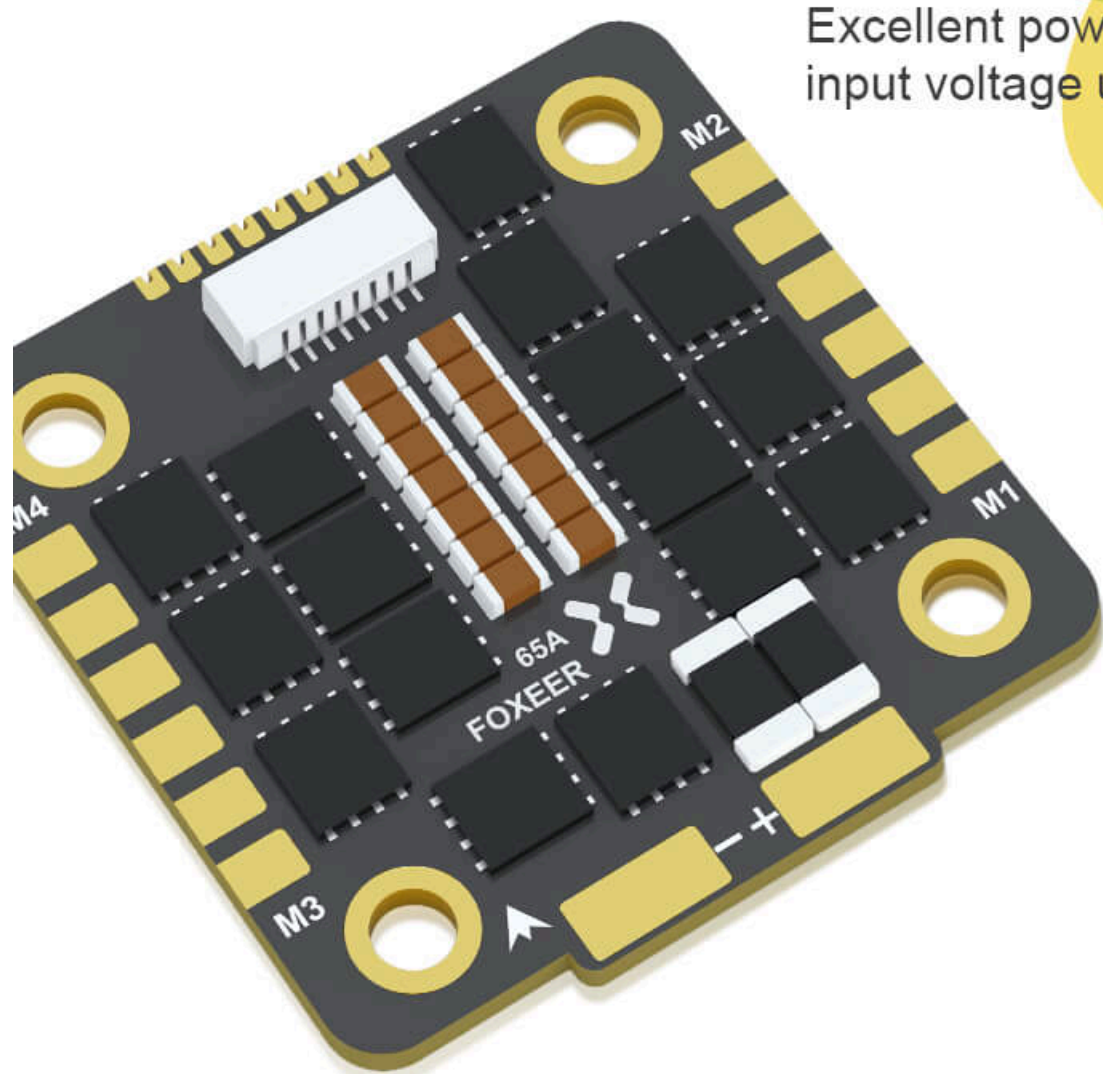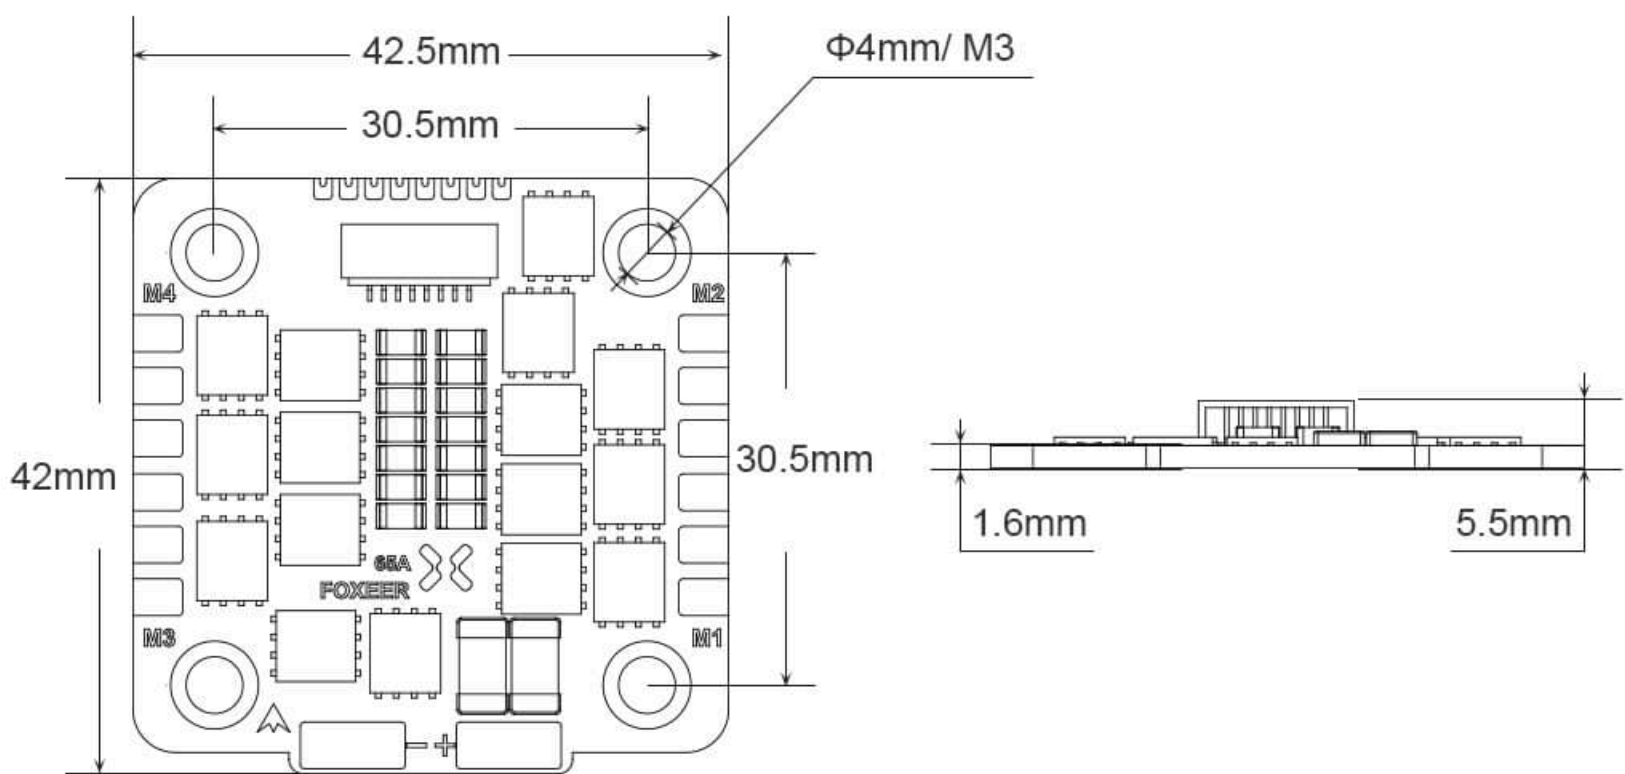Excellent circuit design with powerful **F4** chip avoid the desync issue.

Small Size Big Performance

Well built quality guarantee system duribility.
Plug & Play with Foxeer F722 to enjoy super smooth flying experience.

9V-40V Wide Voltage

Excellent power design supports
input voltage up to 40V.

M2

M4

M1

65A
FOXEER

M3

– +

M3   M4

M3   M4

B–

FOXEER

65A

B+

GND
VCC
S1
S2
S3
S4
CURR
TELE

M1   M2

M1   M2

Specyfikacja:

Firmware	FOXEER_Reaper4IN1_F4_65A_128_Multi_32_9
Continuous /Burst Current	65A*4 / 100A*4
Input Voltage	DC 9V~40V (3-8S Lipo)
BEC	No
Telemetry	Supported
ESC Programming	BLHeli32
Current Scaling	70
Input Signal	DShot 150/ 300/ 600/ 1200 /MultiShot/ OneShot etc.
Working Temperature	-20℃ ~ +55℃
Working Humidity	20 ~ 95%
Storage Temperature	-20℃ ~ +70℃
Mounting Hole	30.5X30.5mm,Φ4mm/M3
Dimension	42.5x42x5.5mm
Weight	14.8g