


Existing single-frame calibration methods, with and without a distortion-aware camera model

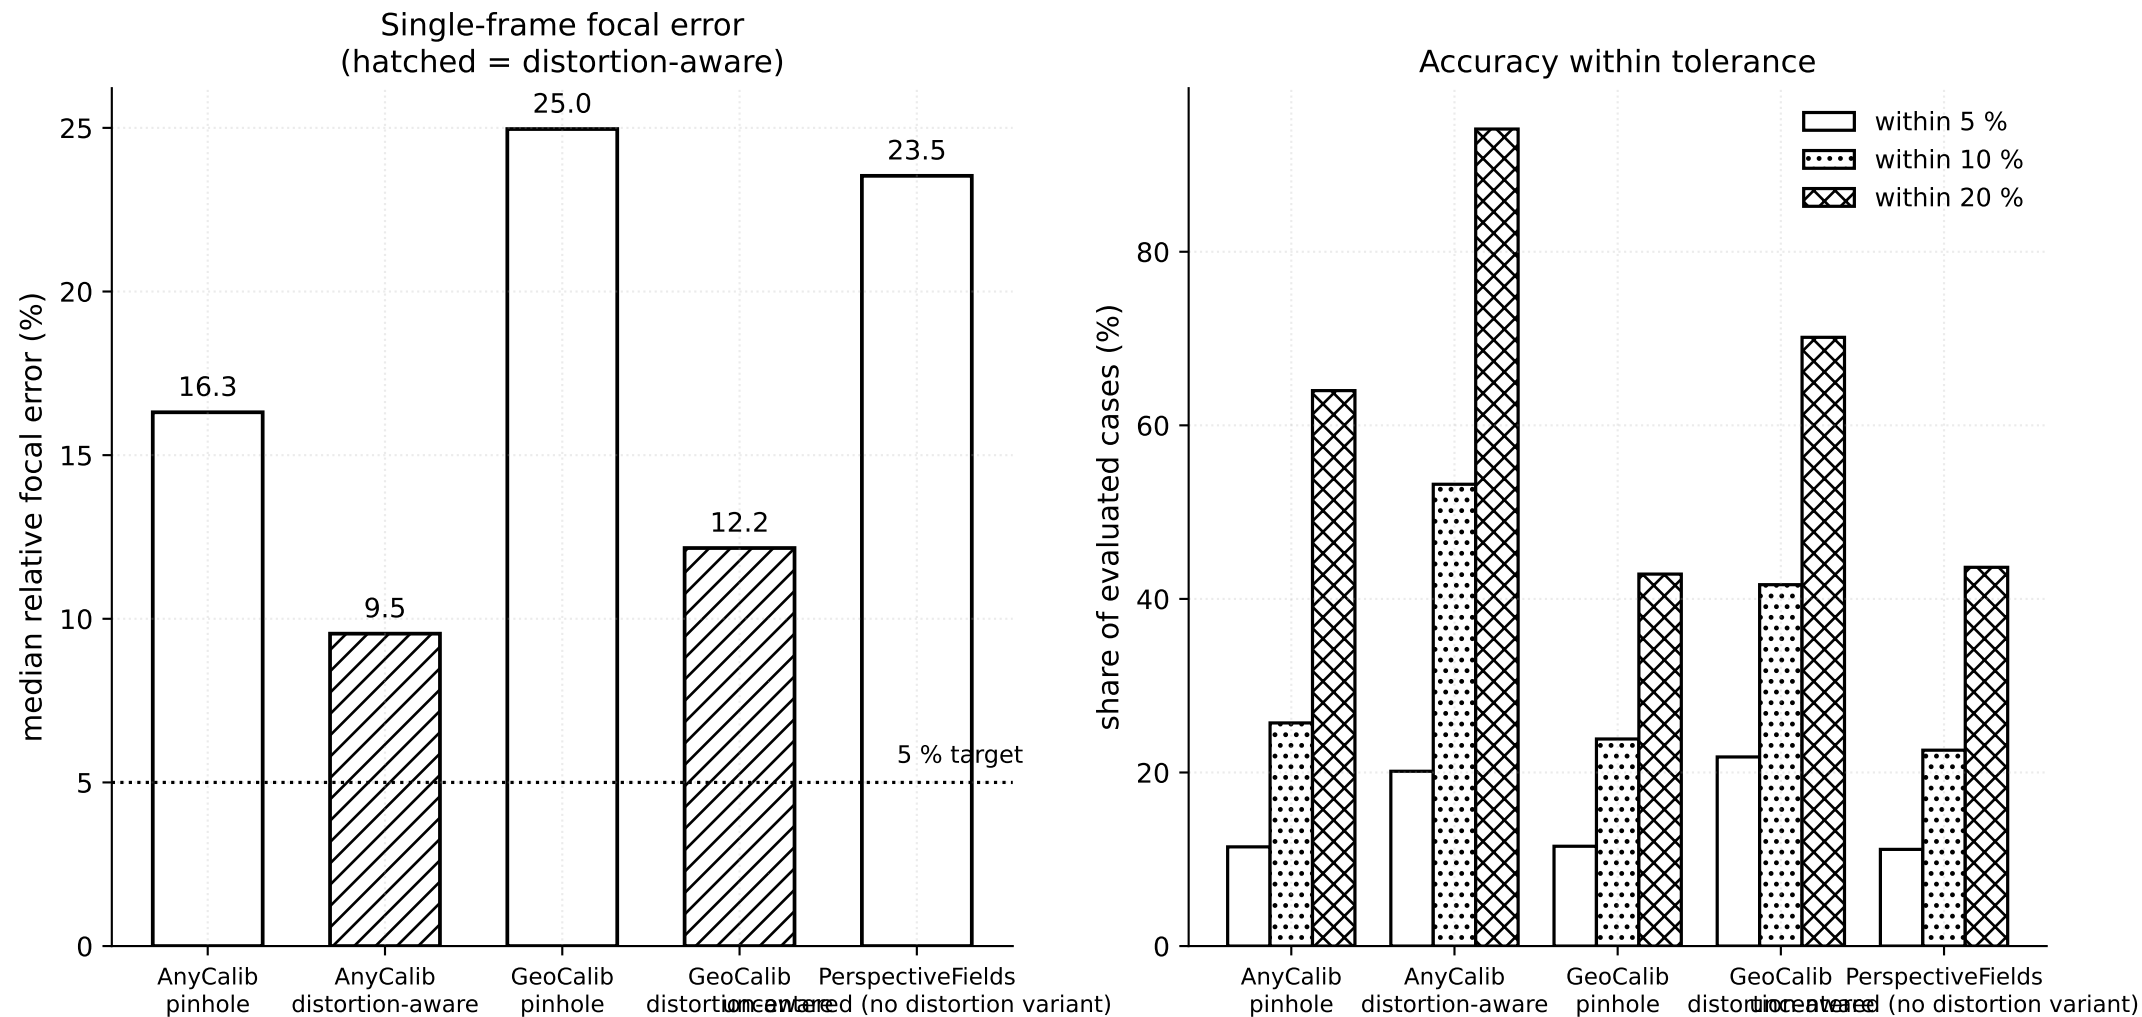

175 fixed-camera views, 8 frames per view, 1400 frames in total. Statistical unit = view; the 1400 frames are repeated observations, not independent samples.

Paired view-clustered gain from the distortion-aware model: AnyCalib +6.54 pp [+4.57, +8.49], GeoCalib +8.53 pp [+5.09, +12.86].