


The Secondary LCD Monitor

Among the settings that can be viewed in the secondary LCD monitor are shutter speed, aperture, and ISO sensitivity. Different settings are displayed in still photography and movie modes.




Secondary LCD monitor

Default Settings

By default, the secondary LCD monitor displays the settings listed below.

The settings displayed can be selected using **SCREEN SET-UP > SUB MONITOR SETTING**.

Still Photography Mode

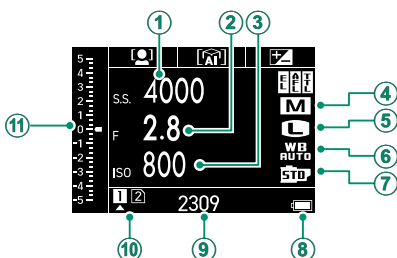

Default

① SHUTTER SPEED	⑦ FILM SIMULATION
② APERTURE	⑧ BATTERY LEVEL
③ ISO	⑨ FRAMES REM.
④ SHOOTING MODE	⑩ CARD SLOT OPTIONS
⑤ IMAGE SIZE	⑪ Scale
⑥ WHITE BALANCE	

BATTERY LEVEL, **FRAMES REM.**, and **CARD SLOT OPTIONS** cannot be changed in the settings.