


$\text{value} = \frac{\mathbf{V}_1}{a^2 + s^2}$   
 $\text{dc} = V_{\text{DC}}$   
 $\text{dcvar} = V_{\text{DC}}^2 \sigma_V^2$   
 $\text{noise} = S_V$

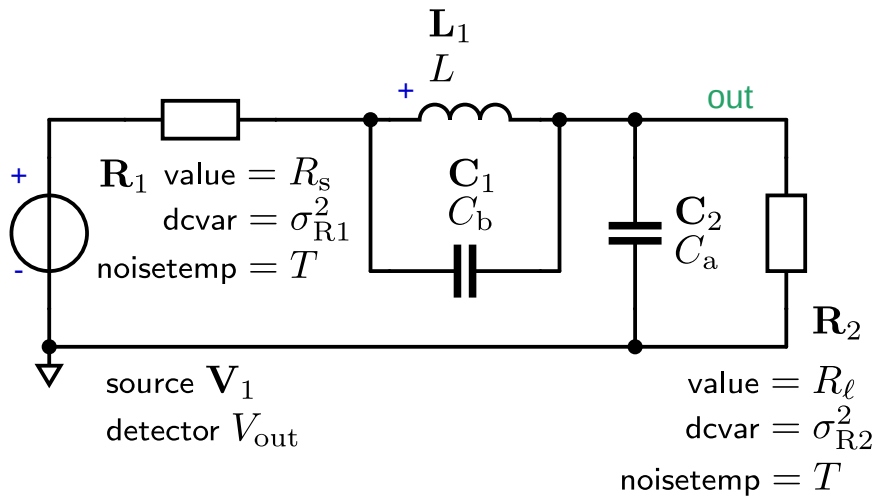

parameters

|                 |                              |
|-----------------|------------------------------|
| $R_s$           | 50                           |
| $R_\ell$        | 450                          |
| $C_a$           | $25 \cdot 10^{-9}$           |
| $C_b$           | $\frac{0.25}{\pi^2 L f_s^2}$ |
| $f_s$           | $5 \cdot 10^6$               |
| $S_V$           | $4 \cdot 10^{-18}$           |
| $V_{\text{DC}}$ | 5                            |
| $\sigma_V$      | $50 \cdot 10^{-3}$           |
| $\sigma_{R1}$   | $20 \cdot 10^{-3}$           |
| $\sigma_{R2}$   | $10 \cdot 10^{-3}$           |
| $a$             | $6.283 \cdot 10^6$           |
| $L$             | $1 \cdot 10^{-6}$            |