


$\text{value} = \frac{\mathbf{V}_1}{a^2 + s^2}$
 $\text{dc} = V_{\text{DC}}$
 $\text{dcvar} = V_{\text{DC}}^2 \sigma_V^2$
 $\text{noise} = S_V$

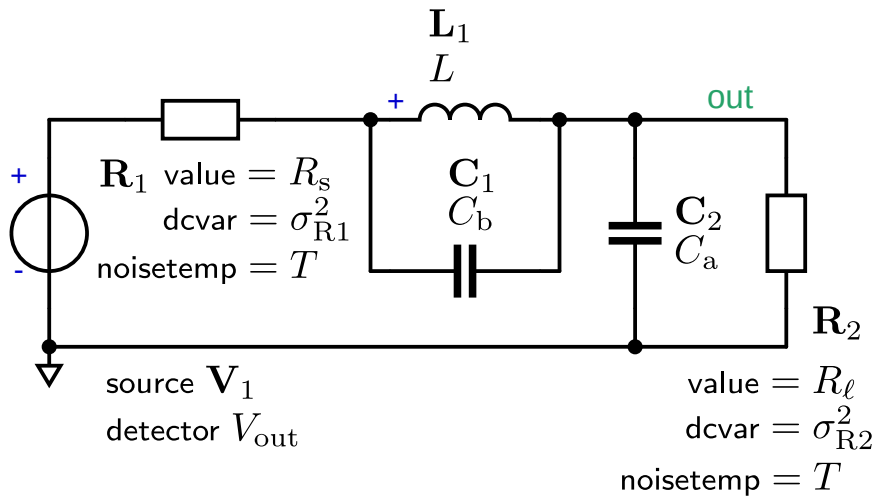

parameters	
R_s	50
R_ℓ	450
C_a	$25 \cdot 10^{-9}$
C_b	$\frac{0.25}{\pi^2 L f_s^2}$
f_s	$5 \cdot 10^6$
S_V	$4 \cdot 10^{-18}$
V_{DC}	5
σ_V	$50 \cdot 10^{-3}$
σ_{R1}	$20 \cdot 10^{-3}$
σ_{R2}	$10 \cdot 10^{-3}$
a	$6.283 \cdot 10^6$
L	$1 \cdot 10^{-6}$