


$$\text{value} = \frac{\mathbf{V}_1}{a^2 + s^2}$$

$$\text{dc} = V_{\text{DC}}$$

$$\text{dcvar} = V_{\text{DC}}^2 \sigma_V^2$$

$$\text{noise} = S_V$$

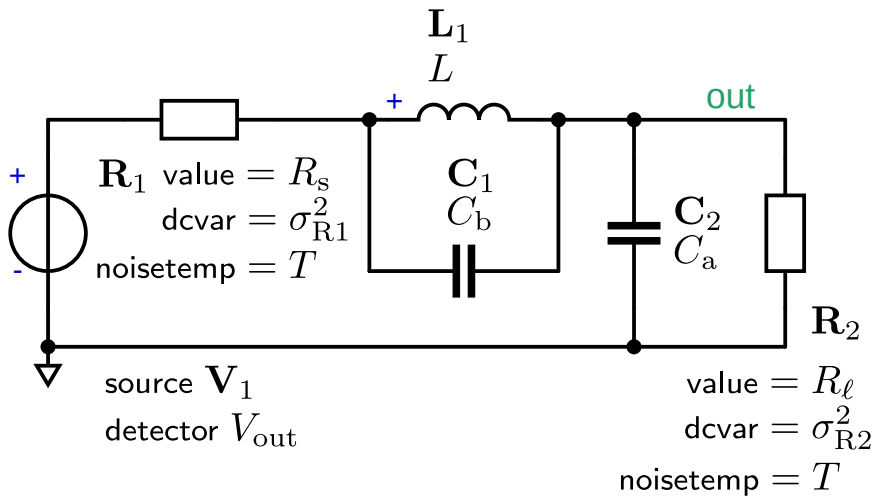

parameters

$$R_s = 50$$

$$R_\ell = 450$$

$$C_a = 25 \cdot 10^{-9}$$

$$C_b = \frac{0.25}{\pi^2 L f_s^2}$$

$$f_s = 5 \cdot 10^6$$

$$S_V = 4 \cdot 10^{-18}$$

$$V_{\text{DC}} = 5$$

$$\sigma_V = 50 \cdot 10^{-3}$$

$$\sigma_{R1} = 20 \cdot 10^{-3}$$

$$\sigma_{R2} = 10 \cdot 10^{-3}$$

$$a = 6.283 \cdot 10^6$$

$$L = 1 \cdot 10^{-6}$$