
X Band High Altitude Waveguide Bandpass Filter

【Product introduction】:

Features: High altitude, high power, sealed, without tuning screws.

【Technical indicators】:

1. Working frequency: 9.55~10.30Ghz
2. VSWR: 1.20:1 MAX
3. Insertion loss: 0.5db MAX
4. Rejection: 30db MIN@9.38Ghz
5. Power Capacity: 200W (average power)
6. Air tight requirements: inflate 0.12Mpa. Reduce less than 0.01Mpa after 1hour.
7. Structure:

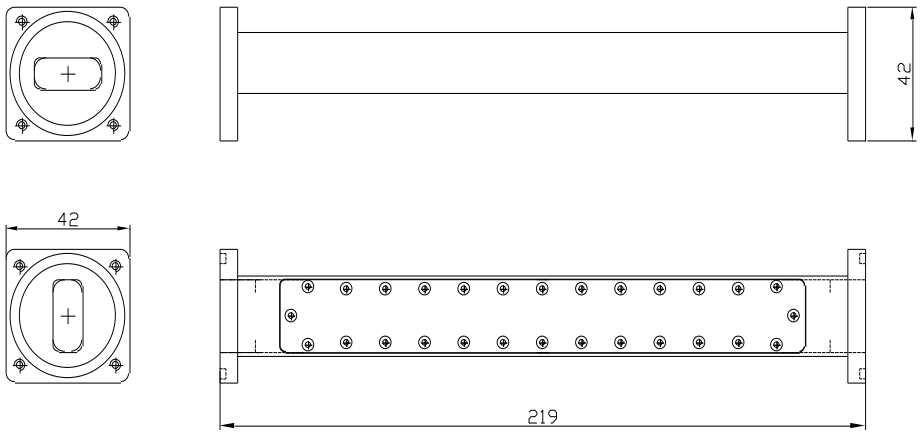

X Band High Altitude Waveguide Bandpass Filter



X Band High Altitude Waveguide Bandpass Filter