Ku Band Satellite Communication Duplexer

【Product introduction】:


Contains two duplexers.

Features: Compact structure, low insertion loss, great rejection.

【Technical indicators】:

1. Working frequency: RX: 12.0~13.0GHz TX: 14.0~14.5GHz
2. VSWR: 1.22:1 MAX
3. Insertion loss: 0.45dB MAX
4. Isolation: TX/RX 90dB MIN

   RX/TX 50dB MIN
5. Phase coherence: ±3° MAX
6. Interface: Non-standard WR75
7. Structure:

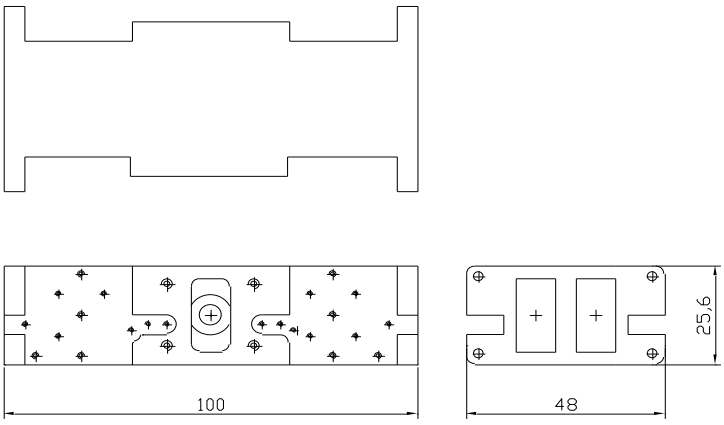

Ku Band Satellite Communication Duplexer



Ku Band Satellite Communication Duplexer

Address: 9th Floor, Building 1, Liandong U Valley, 118 Hangtian Road. Chengdu. China. 610052
Web: www.slmicrowave.com www.sanlianweixun.com
Email: wangrui@slmicrowave.com wangrui@sanlianweixun.com