Ku Band satcom duplexer

【Product introduction】:

Features: High power capacity, great rejection.

【Technical indicators】:

1. Working frequency: RX: 10.70~12.75GHz

   TX: 13.75~14.50GHz

2. VSWR: 1.25:1 MAX

3. Insertion loss: RX: 0.60dB MAX; TX: 0.45dB MAX


4. Isolation: TX/RX: 110dB MIN

   RX/TX: 90dB MIN

5. Power capacity: 2KW (Each TX port with 1KW input power)

6. Interface: Common port: Φ19.05 circular waveguide; Other ports: WR75

7. Structure:

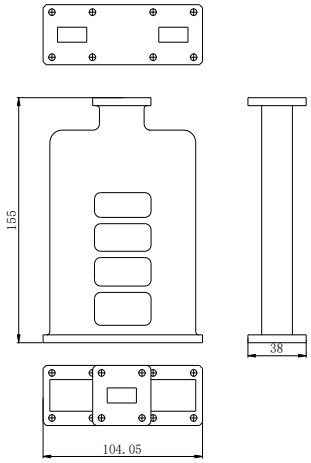

Ku Band Satellite Communication Duplexer (Type A)



Ku Band Satellite Communication Duplexer (Type A)