Ku Band Duplexer

【Product introduction】:

Features: Great rejection, low phase variation.

【Technical indicators】:

1. Working frequency: RX: 12.25~12.75GHz

   TX:14.00～14.50GHz

2. VSWR: 1.22:1 MAX

3. Insertion loss: 0.40dB MAX

4. Isolation: TX/RX: 90dB MIN


   RX/TX: 62dB MIN

5. phase coherence: ±3° MAX

6. Interface: Common port: Non-standard WR75;

   RX: Non-standard WR75 flange; TX: SMA-K

7. Structure:

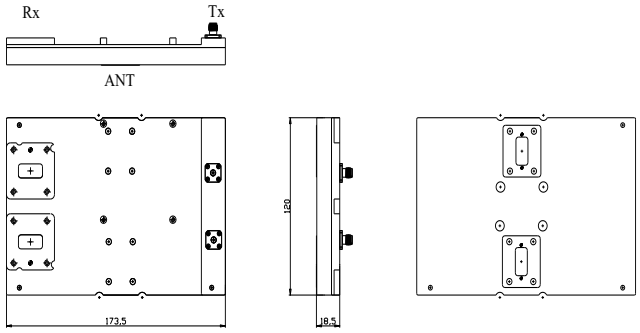

Ku Band Satellite Communication Duplexer (Type B)



Ku Band Satellite Communication Duplexer (Type B)

Address: 9th Floor, Building 1, Liandong U Valley, 118 Hangtian Road. Chengdu. China. 610052
Web: www.slmicrowave.com www.sanlianweixun.com
Email: wangrui@slmicrowave.com wangrui@sanlianweixun.com