Ku Band Satellite Communication 4 in 1 dividers


【Product introduction】:

Features: Excellent indicators and stable physical structure. Normally used for SOTM system as rf signal combiner.

【Technical indicators】:

1. Working frequency: RX: 12.25～12.75GHz

   TX: 14.00～14.50GHz
2. VSWR: 1.15:1 MAX
3. Insertion loss: 0.3dB MAX
4. Phase variation: ±4° MAX
5. Weight: 700gram
6. Interface: WR75
7. Structure:

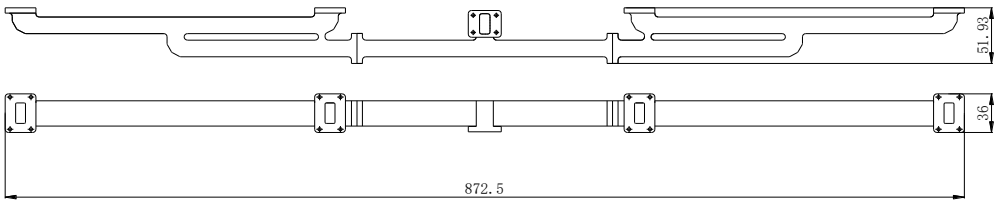

Ku Band Satellite Communication 4 in 1 Combiner



Ku Band Satellite Communication 4 in 1 Combiner