Ku Band Satellite Communication 8 in 1 dividers


【Product introduction】:

Features: Excellent indicators and stable physical structure. Normally used for communication on the move system as rf signal combiner.

【Technical indicators】:

1. Working frequency: RX:12.25～12.75GHz

   TX: 14.00～14.50GHz
2. VSWR: 1.15:1 MAX
3. Insertion loss: 0.4dB MAX
4. Phase variation: ±4° MAX
5. Weight: 1700 gram
6. Interface: WR75
7. Structure:

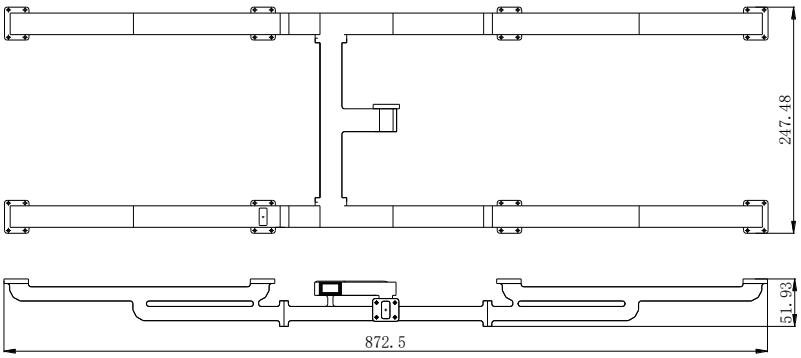

Ku Band Satellite Communication 8 in 1 Combiner



Ku Band Satellite Communication 8 in 1 Combiner

Address: 9th Floor, Building 1, Liandong U Valley, 118 Hangtian Road. Chengdu. China. 610052
Web: www.slmicrowave.com www.sanlianweixun.com
Email: wangrui@slmicrowave.com wangrui@sanlianweixun.com