
Ku Band Waveguide Rotary Joint II

【Product introduction】:


Features: Low insertion loss, stable structure. Can be used for antenna feed system.

【Technical indicators】:

1. Working frequency: 10.7～14.5GHz
2. VSWR: 1.15:1 MAX
3. Insertion loss: 0.2dB MAX
4. Operating temperature: -55℃～+85℃
5. Interface: circular waveguide Φ 19.05
6. Structure:

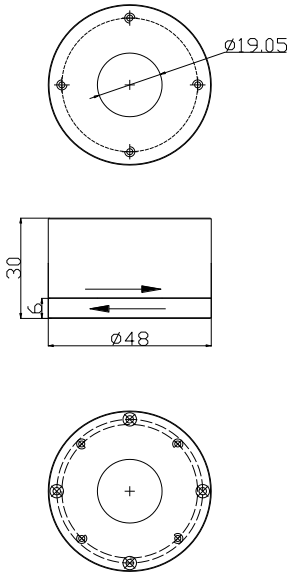

Ku Band Waveguide Rotary Joint II



Ku Band Waveguide Rotary Joint II