
Ku Band U/SMA Type Waveguide Rotary Joint

【Product introduction】:

Features: Low insertion loss, stable structure. Can be used for antenna feed system.

【Technical indicators】:

1. Working frequency: 14.5～16.5GHz
2. VSWR: 1.2:1 MAX
3. Insertion loss: 0.3dB MAX
4. Operating temperature: -40℃～+70℃
5. Interface: WR62 Non-standard flange/SMA-K, average power: 70W
6. Structure:

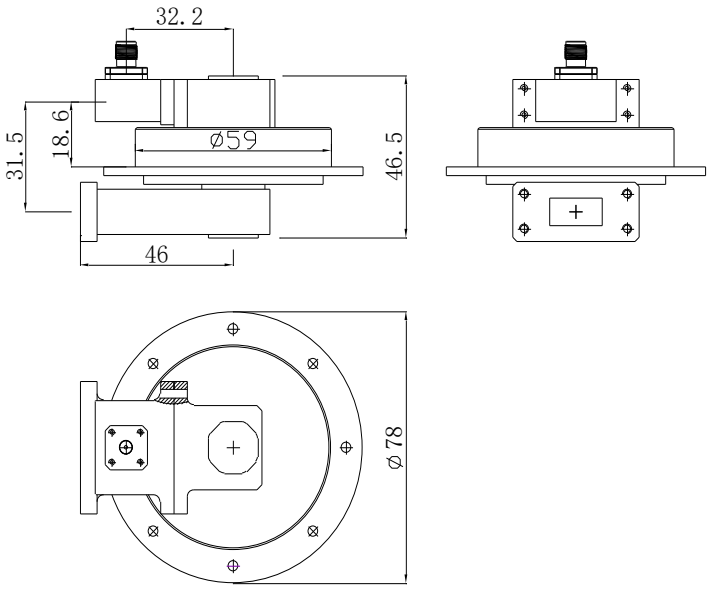

Ku Band U/SMA Type Waveguide Rotary Joint



Ku Band U/SMA Type Waveguide Rotary Joint

Address: 9th Floor, Building 1, Liandong U Valley, 118 Hangtian Road. Chengdu. China. 610052
Web: www.slmicrowave.com www.sanlianweixun.com
Email: wangrui@slmicrowave.com wangrui@sanlianweixun.com