K/Ka Band OMT

【Product introduction】:

Features: Low insertion loss, great isolation.

【Technical indicators】:

1. Working frequency: RX: 17.7～21.2GHz

   TX: 29.0～31.0GHz


2. VSWR: 1.15:1 MAX

3. Insertion loss: 0.15dB MAX

4. Isolation: 35dB MIN

5. Interface: Common port: circular waveguide Φ 11.6;other ports: WR42、WR28

6. Structure:

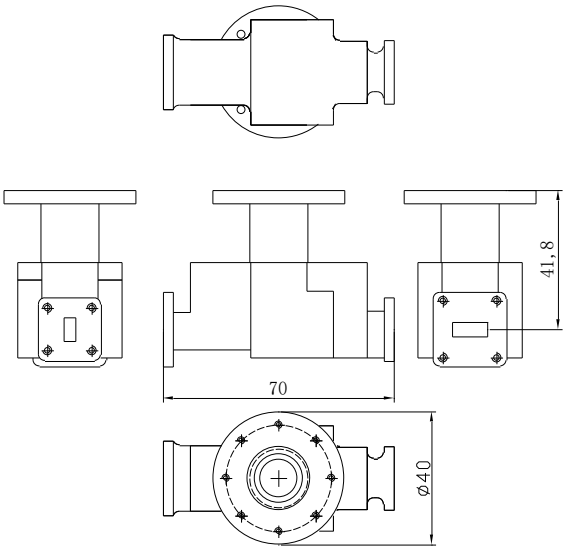

K/Ka Band OMT



K/Ka Band OMT

Address: 9th Floor, Building 1, Liandong U Valley, 118 Hangtian Road. Chengdu. China. 610052
Web: www.slmicrowave.com www.sanlianweixun.com
Email: wangrui@slmicrowave.com wangrui@sanlianweixun.com