K/Ka Band Circular Polarization Component

【Product introduction】:


Including circular polarizer, OMT, filter. Used for a part of antenna feed.

Features: High power capacity, great rejection.

【Technical indicators】:

1. Working frequency: K: 20.2～21.2GHz; Ka: 28.5～29.5GHz
2. VSWR: 1.25:1 MAX
3. Insertion loss: 0.5dB MAX
4. Circular polarizability: 0.5～1.2dB
5. Isolation: TX/RX: 110dB MIN

   RX/TX: 35dB MIN
6. Transmit power: 150W
7. Interface: circular waveguideΦ10.3; WR42(K band); WR28(Ka band)
8. Structure:

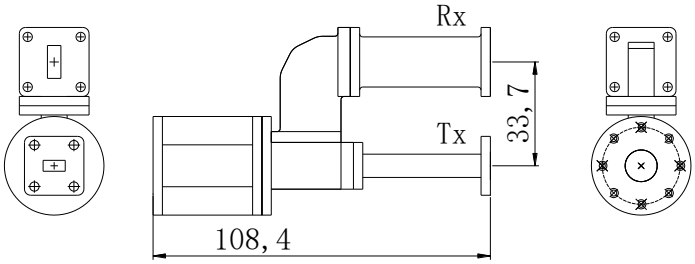

K/Ka Band Circular Polarization Component



K/Ka Band Circular Polarization Component

Address: 9th Floor, Building 1, Liandong U Valley, 118 Hangtian Road. Chengdu. China. 610052
Web: www.slmicrowave.com www.sanlianweixun.com
Email: wangrui@slmicrowave.com wangrui@sanlianweixun.com