Extend C Band 4 Port Linear Polarization Diplexer

【Product introduction】:

Contains OMT and 2 duplexers. Used for a part of antenna feed.

Features: wide working bandwidth, low insertion loss, great rejection, high Power Capacity.


【Technical indicators】:

1. Working frequency: RX: 3.40~4.80GHz; TX: 5.85~7.025GHz
2. VSWR: 1.25:1 MAX
3. Insertion loss: 0.20dB MAX
4. Isolation: RX/TX 95dB MIN

   TX/RX 95dB MIN

   TX/TX 40dB MIN


   RX/RX 40dB MIN
5. Power Capacity: 5KW(CW)
6. Interface: WR229(RX), WR137(TX)
7. Structure:

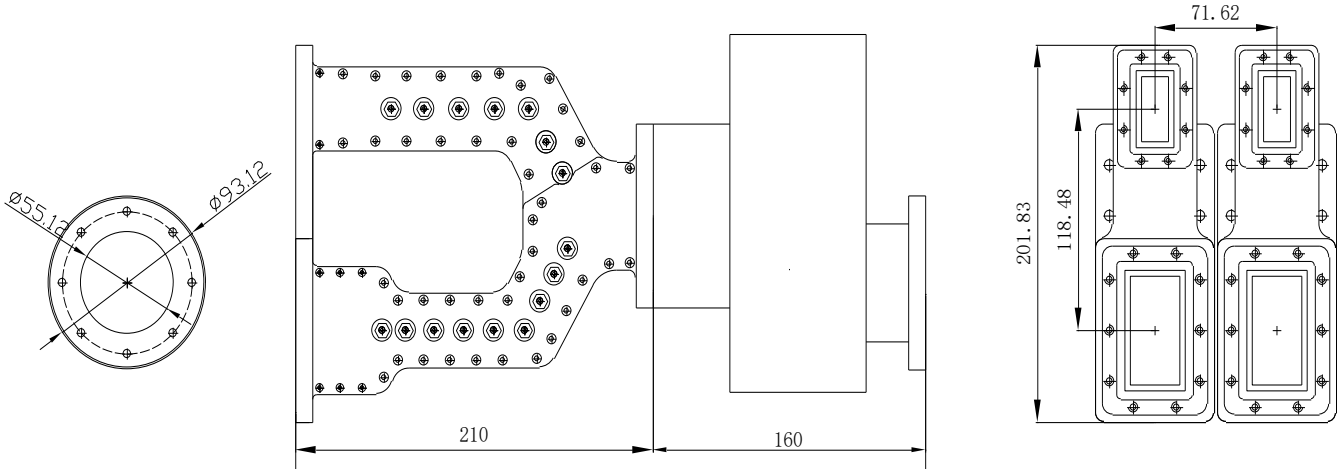

Extend C Band 4 Port Linear Polarization Duplexer



(a)

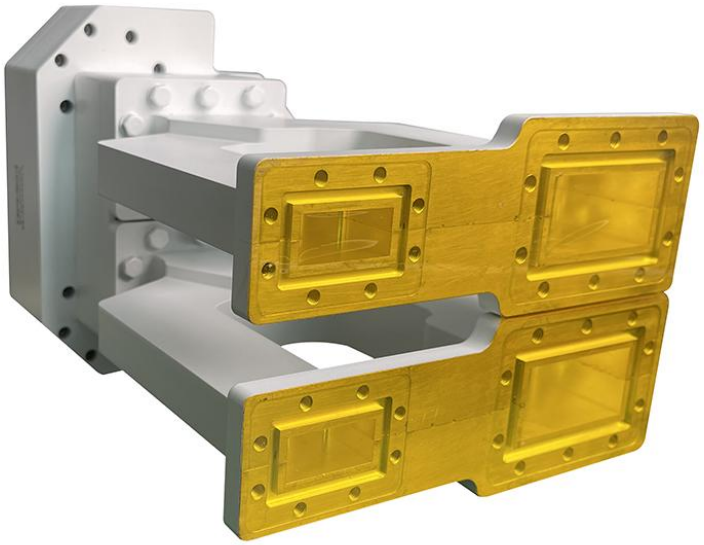

(b)

Extend C Band 4 Port Linear Polarization Duplexer