Ku Band 4 Port Linear Polarization Duplexer

【Product introduction】:

Contains OMT and 2 duplexers.

Features: High power capacity, great rejection. Used for a part of antenna feed.


【Technical indicators】:

1. Working frequency: RX:10.70~12.75GHz, TX:17.30~18.4GHz
2. VSWR: 1.20:1 MAX
3. Insertion loss: 0.50dB MAX(RX), 0.35dB MAX(TX)
4. Isolation: TX/RX 100dB MIN

   RX/TX 90dB MIN

   RX/RX 35dB MIN

   TX/TX 35dB MIN
5. Power Capacity: 1000W(TX)
6. Interface: Common port: Φ19.05 circular waveguide; TX: WR62; RX: WR75
7. Structure:

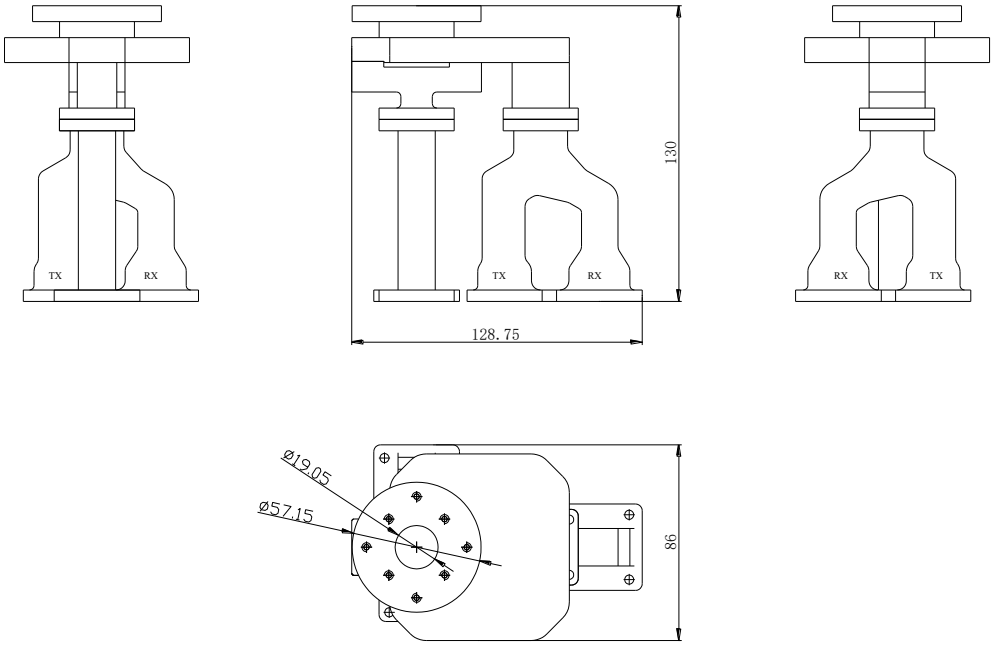

Ku Band 4 Port Linear Polarization Duplexer

Address: 9th Floor, Building 1, Liandong U Valley, 118 Hangtian Road. Chengdu. China. 610052
Web: www.slmicrowave.com www.sanlianweixun.com
Email: wangrui@slmicrowave.com wangrui@sanlianweixun.com




（a）



(c)



（b）

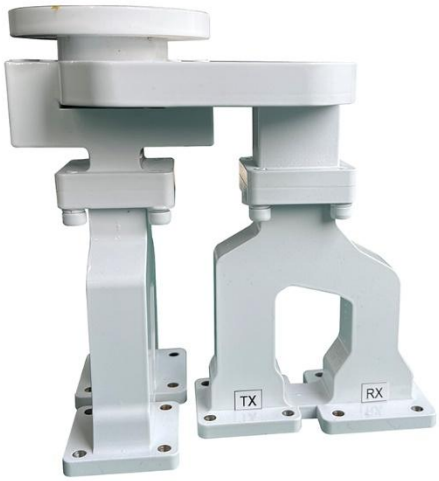

(d)

Ku Band 4 Port Linear Polarization Duplexer