Ku/K/Ka multi band antenna feed compoents

【Product introduction】:

Including splitter, combiner, filter, connecting waveguide.

Features: wide bandwidth, low insertion loss, compact size.

【Technical indicators】:

1. Working frequency: Ku band: 12.25～12.75GHz (RX);14～14.5GHz (TX)

   K/Ka band: 19.6～21.2GHz (RX);29.4～31.0GHz (TX)

2. VSWR: 1.25:1 MAX

3. Insertion loss: 0.35dB MAX @ Ku/K/Ka


4. Isolation: K/Ku: 60dB MIN

   Ka/Ku: 40dB MIN


   Ku Orthogonal mode isolation: 40dB MIN

5. Phase difference: Ku: ±4° MAX; K/Ka: ±4° MAX


6. Structure:

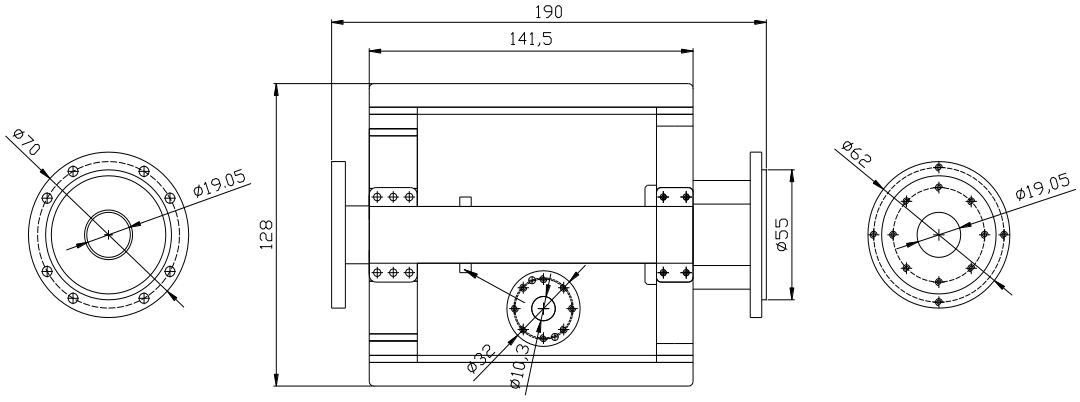

Ku/K/Ka Multi Band Orthogonal Mode Component (Type A)

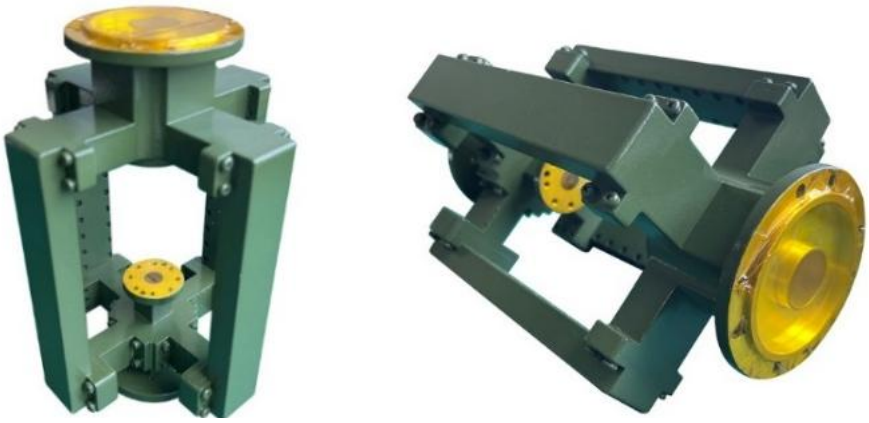


Ku/K/Ka Multi Band Orthogonal Mode Component (Type A)

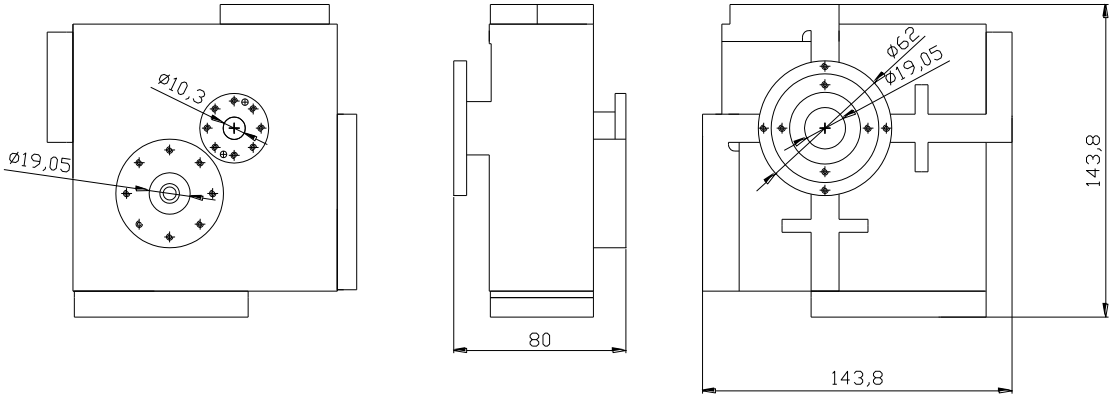


Ku/K/Ka Multi Band Orthogonal Mode Component (Type B)




Ku/K/Ka Multi Band Orthogonal Mode Component (Type B)

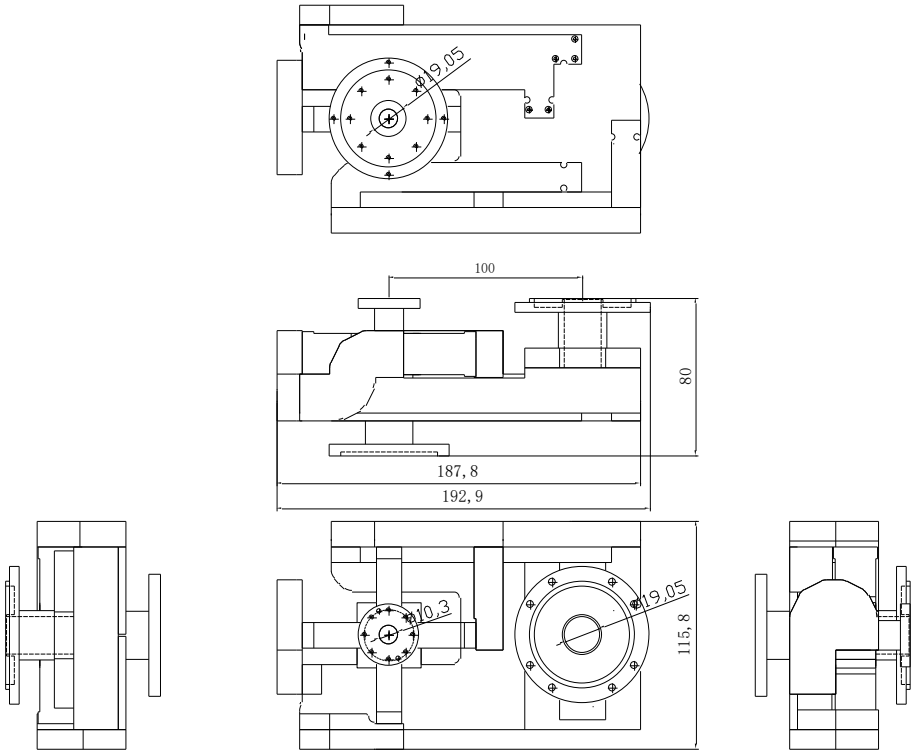


Ku/K/Ka Multi Band Orthogonal Mode Component (Type C)

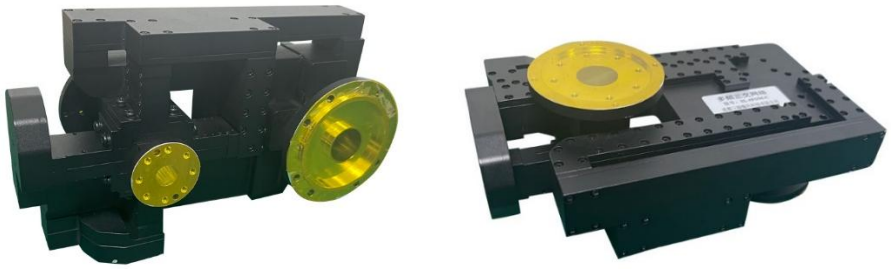

Ku/K/Ka Multi Band Orthogonal Mode Component (Type C)

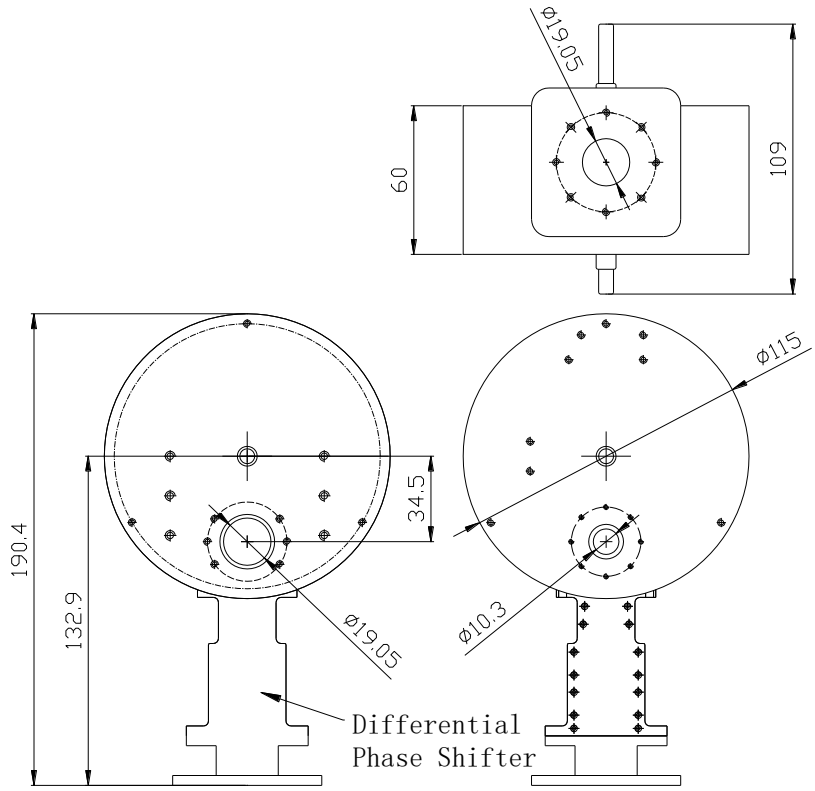

Ku/K/Ka Multi Band Orthogonal Mode Component (Type D)

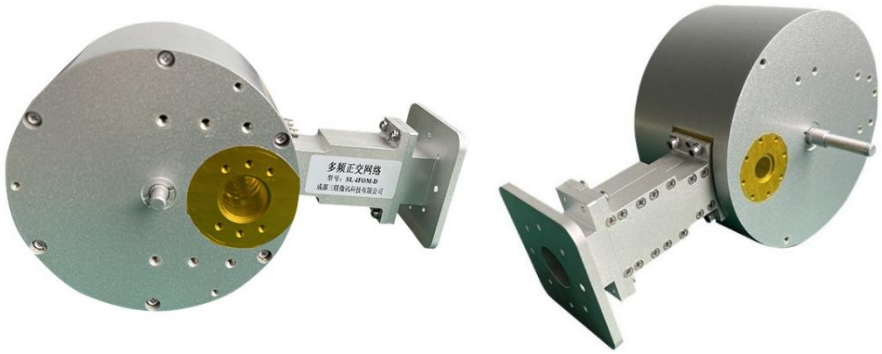

Ku/K/Ka Multi Band Orthogonal Mode Component (Type D)