Ku/K/Ka multi band antenna feed system


【Product introduction】:

Including splitter, combiner, OMT, circular polarizer, rotary joints, 180º phase shifter, septum polarizer, filters and connecting waveguides.

Features: wide band, low insertion loss, good rejection, compact size.


【Technical indicators】:

1. Working frequency: Ku band: 11.45～12.75GHz (RX); 13.75～14.5GHz (TX)
   K/Ka band: 19.6～21.2GHz (RX); 29.4～31.0GHz (TX)
2. VSWR: 1.35:1 MAX
3. Insertion loss: 0.6dB MAX
4. Isolation: (K/Ka)/Ku: 60dB MIN
   Ku/(K/Ka): 100dB MIN
   Ku: TX/RX 85dB MIN
   Ku: RX/TX 35dB MIN
   K/Ka: TX/RX 90dB MIN
   K/Ka: RX/TX 90dB MIN
5. Interface: Common port: circular waveguide Φ19.05
   Ku band: RX: WR75; TX: WR75
   K/Ka band: RX: WR42(K); TX: WR28(Ka)
6. Principal schematic:

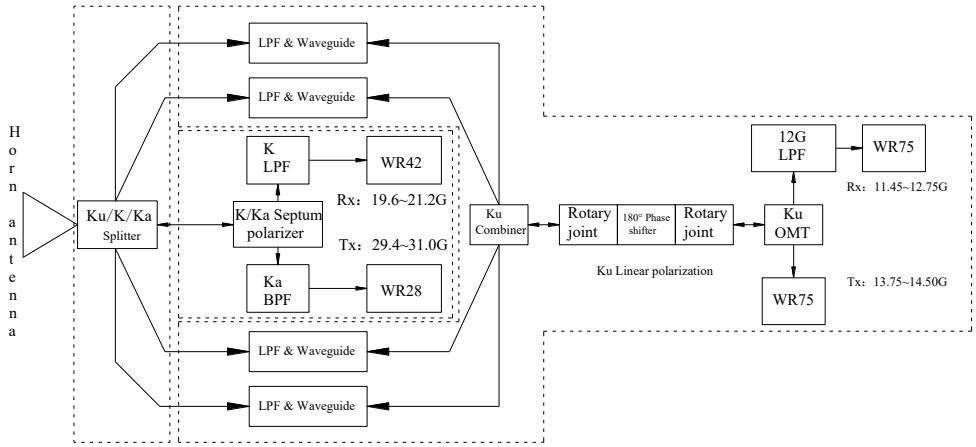

Ku/K/Ka Multi Band Orthogonal Mode Subsystem (Type B)

7. Structure:

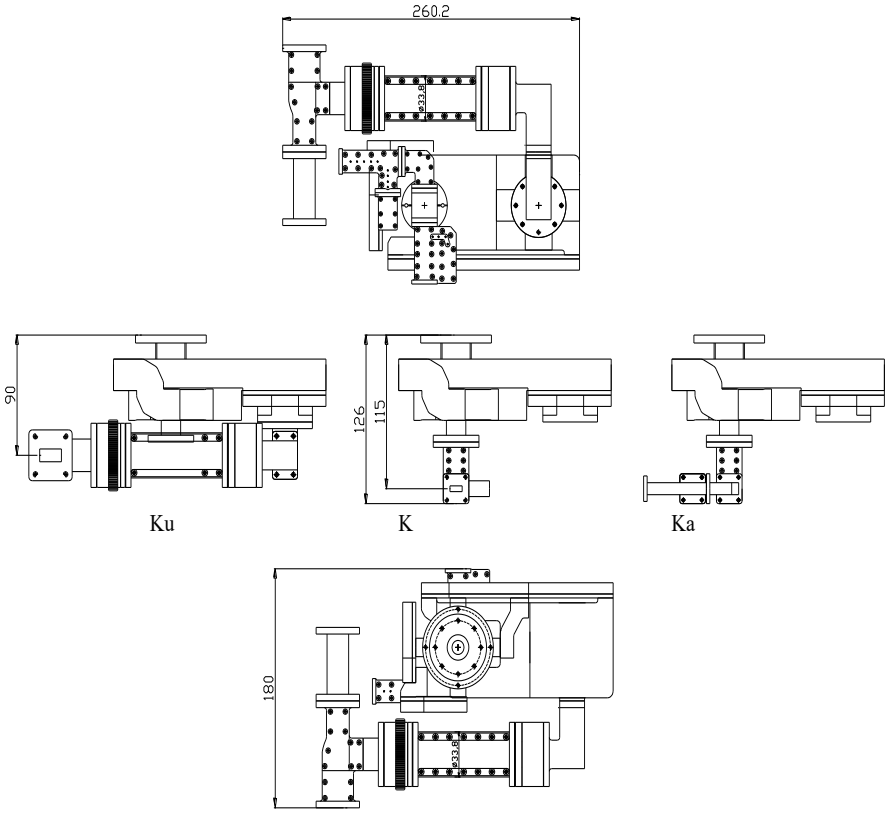

Ku/K/Ka Multi Band Orthogonal Mode Subsystem (Type B)



Ku/K/Ka Multi Band Orthogonal Mode Subsystem (Type B)