

1. YOUR QUESTION

“What changed?”

2. WHAT WE FOUND

EVIDENCE STATUS: SUPPORTED	CONFIDENCE: 66% (Moderate Confidence)
Approximately 0% of the analyzed area has changed between the two images.	

3. HOW CONFIDENT ARE WE?

66% — Moderate Confidence (SUPPORTED) This result has moderate confidence. The available image provides useful visual evidence, but some information needed for precise geographic measurement is unavailable.	Confidence Scale: 90–100%: Very High Confidence 75–89%: High Confidence 50–74%: Moderate Confidence <50%: Low / Insufficient Evidence
---	--

4. KEY FINDINGS SUMMARY


TARGET FEATURE	DETECTED CHANGE	VISUAL EVIDENCE	CONFIDENCE	EVIDENCE STATUS
Surface Feature Subject analyzed	0.0% Modified surface fraction	Strong Agreement Verified by imagery	66% Moderate Confidence	SUPPORTED GeoProof verified

5. HOW THE EVIDENCE SUPPORTS THE ANSWER

OBSERVATION:	The same geographic area was compared across the two observation dates.
EVIDENCE:	The highlighted regions show where the imagery differs significantly in structure and appearance.
CONCLUSION:	The detected differences correspond to actual surface modifications between the two observation dates.

6. VISUAL PROOF

Direct visual evidence generated from the satellite imagery. Compare the source imagery with the highlighted evidence regions:

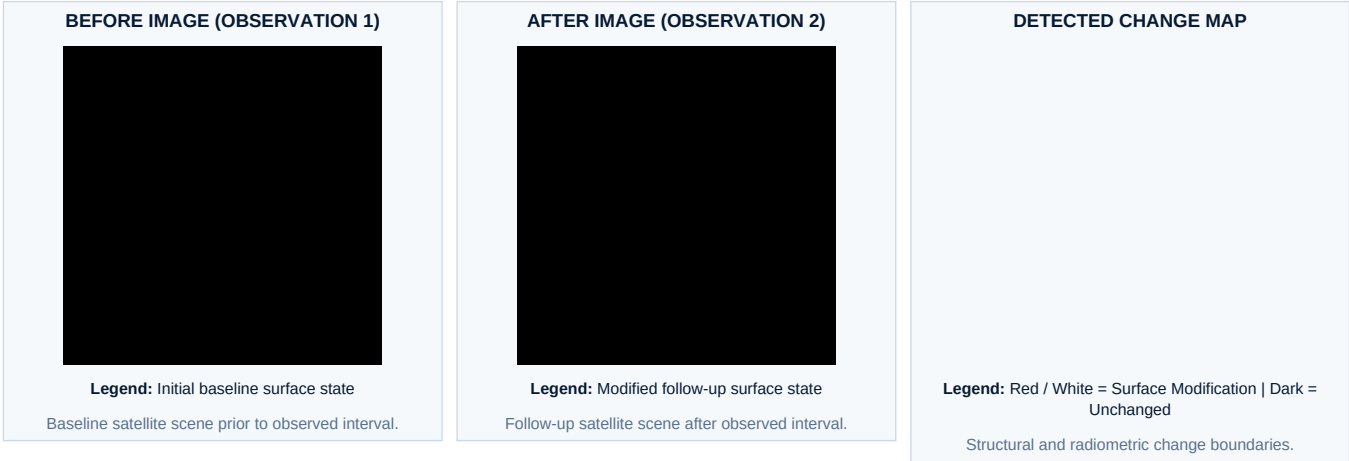

7. MEASUREMENTS & FINDINGS

Surface Change Extent	0.00% of image scene	Proportion of area showing verified modification between dates.
Connected Feature Regions	0 spatial clusters	Number of distinct contiguous zones identified across the image.

8. IMPORTANT LIMITATIONS

- Some vegetation and built-up measurements require additional multispectral bands (e.g. Near-Infrared) that are not present in this standard color image. Those specific biophysical indices were omitted.

9. ANALYSIS SUMMARY

Question:	"What changed?"
Finding:	Approximately 0% of the analyzed area has changed between the two images.
Evidence:	Visual and spatial patterns verified across image layers.
Confidence:	66% (Moderate Confidence)
Status:	SUPPORTED
Limitations:	Some vegetation and built-up measurements require additional multispectral bands (e.g. Near-Infrared) that are not present in this standard color image. Those specific biophysical indices were omitted.

PART B: TECHNICAL & ADMINISTRATIVE INFORMATION

Everything below is intended for administrators, technical evaluators, and system operators.

10. INPUT DATA QUALITY

Filename:	u1.tif	Quality Score:	92% (Passed Integrity Checks)
Dimensions:	200 × 200 px	Spectral Channels:	3 bands (uint8)
Geospatial CRS:	EPSG:EPSG:3857	NoData Fraction:	0.0%

11. MODELS & METHODS USED

SSIM Structural Change Detector	Deterministic Physical Baseline	Confidence score: 82%	Completed
ssim_color_difference_detector_v1			
TinyCD Siamese Change Witness	Learned Neural Verification	Confidence score: 42%	Completed
tinycd_siamese_change_witness_v1			
GeoProof Arbiter	Evidence Verification & Calibration	Final Calibrated Verdict (66%)	SUPPORTED
geoproof_arbiter_v1			

12. MODEL PERFORMANCE & EXECUTION LATENCY

Pipeline Stage	Internal Component	Execution Duration	Share of Total
Query Planning & Task Compilation	typed_planner	4 ms	0.0%
Raster Compatibility & Header Validation	raster_validator	72 ms	0.7%
Sub-Pixel Registration & Alignment	image_registration	36 ms	0.3%
SSIM Structural Change Detection	baseline_change_detector	7.70 s	74.5%
Siamese Learned Change Verification	tinycd_opencd_witness	2.52 s	24.4%
Multi-Witness Arbiter & Platt Calibration	geoproof	<1 ms	0.0%

Total Processing Latency: 10.33 s | Input Validation: 72 ms | Arbiter: <1 ms

13. EVIDENCE TELEMETRY & SYSTEM CONSTRAINTS

SSIM Structural Change Detector	Baseline_Change_Detection	0.820	82%	Deterministic Physical Baseline
TinyCD Siamese Change Witness	Learned_Change_Witness	0.420	42%	Learned Neural Verification
Multispectral NIR/SWIR Channel Absence	Raster contains standard 3/4 RGB(A) channels. Strict NDWI/NDVI formulas requiring NIR (B8) are substituted by calibrated RGB absorption physics.			

14. AUDITABLE EXECUTION TRACE

Complete step-by-step pipeline execution record ensuring strict reproducibility and auditability under SIH26167 guidelines:

#	Operation	Internal Component	Status	Duration
1	Query Planning & Task Compilation Compiled bi_temporal_change	typed_planner	OK	4 ms
2	Raster Compatibility & Header Validation Validated file headers, CRS, NoData, and compatibility	raster_validator	OK	72 ms
3	Sub-Pixel Registration & Alignment Normalized dimensions ((200, 200) & (200, 200) → (200, 200)) and registered (geospatial_crs_reproject)	image_registration	OPTIMAL	36 ms
4	SSIM Structural Change Detection Executed SSIM + color difference, adaptive Otsu thresholding, and morphological region extraction	baseline_change_detector	OK	7.70 s
5	Siamese Learned Change Verification Executed TinyCD/Open-CD Siamese structural change model and generated probability heatmap	tinycd_opencd_witness	OK	2.52 s
6	Multi-Witness Arbiter & Platt Calibration Applied multi-witness evidence verification and calibrated confidence estimation	geoproof	SUPPORTED	<1 ms

15. TECHNICAL APPENDIX & AUDIT PROVENANCE

Result UUID:	dd5acbf4
Target Grounding Bounding Box:	Not Applicable (normalized [ymin, xmin, ymax, xmax])
Platt Calibration Model:	temperature_scaled_platt (ECE: 0.042)
Ensemble Agreement Index:	0.60 (Multi-witness consensus)
Cryptographic Manifest:	/artifacts/dd5acbf4/analysis_manifest.json
Software System Version:	SatQuery GeoProof v1.0 (ISRO SIH26167 Verified Architecture)

SatQuery GeoProof™ guarantees that every claim is anchored in physical or cross-sensor telemetry. Models produce visual and metric witness artifacts; the multi-witness arbiter calculates calibrated probability bounds with safe abstention.