

Nema 23 Stepper Motor

Rev: A

Date:


COMMON RATINGS

Step angle :	1.8°	Dielectric strength :	500VAC
Positional accuracy :	±5%	Insulation resistance :	100Mohm(500VDC)
Number of Phase :	2	Ambient Temperature :	-10℃~50℃
Temperature rise :	80℃MAX	Insulation class :	B
Rotor Inertia :	800gcm ²	Weight :	1.6Kg


SPECIFICATIONS

Holding Torque (2 phases on) Nm	Rated Current/Phase (Amps DC)	Phase Resistance (ohms) ±10%	Voltage Current/Phase (V DC)	Phase Inductance (mH)±20%(1KHz) Typical
3.0	4.2	0.9	3.78	3.8

DIMENSIONS unit=mm

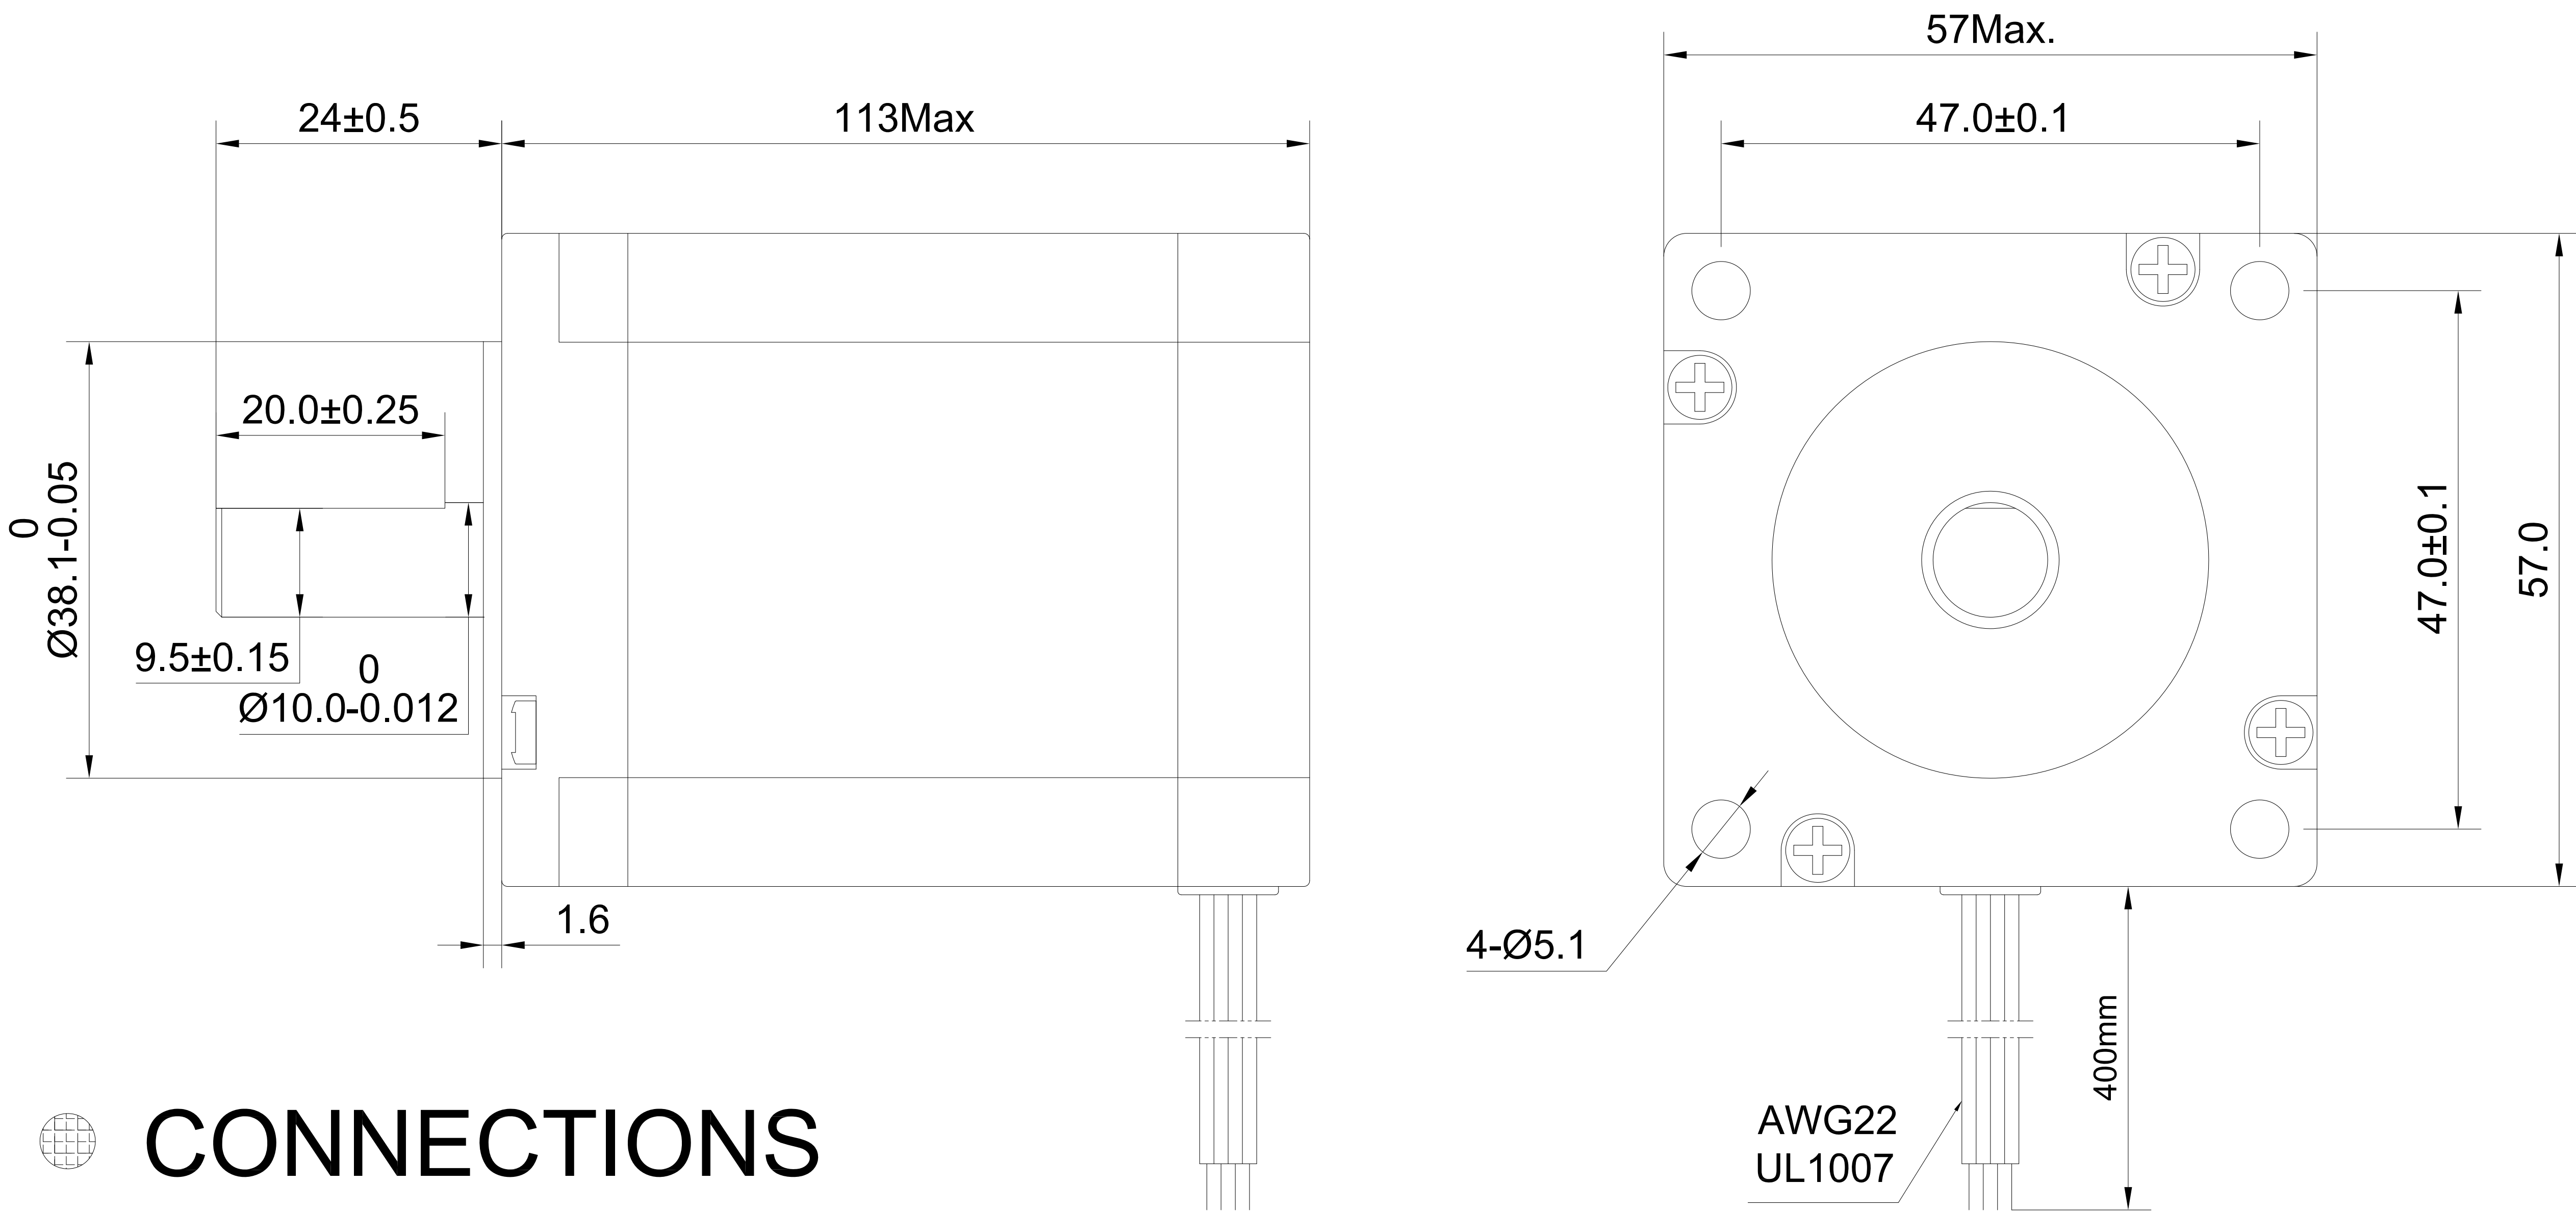

CONNECTIONS

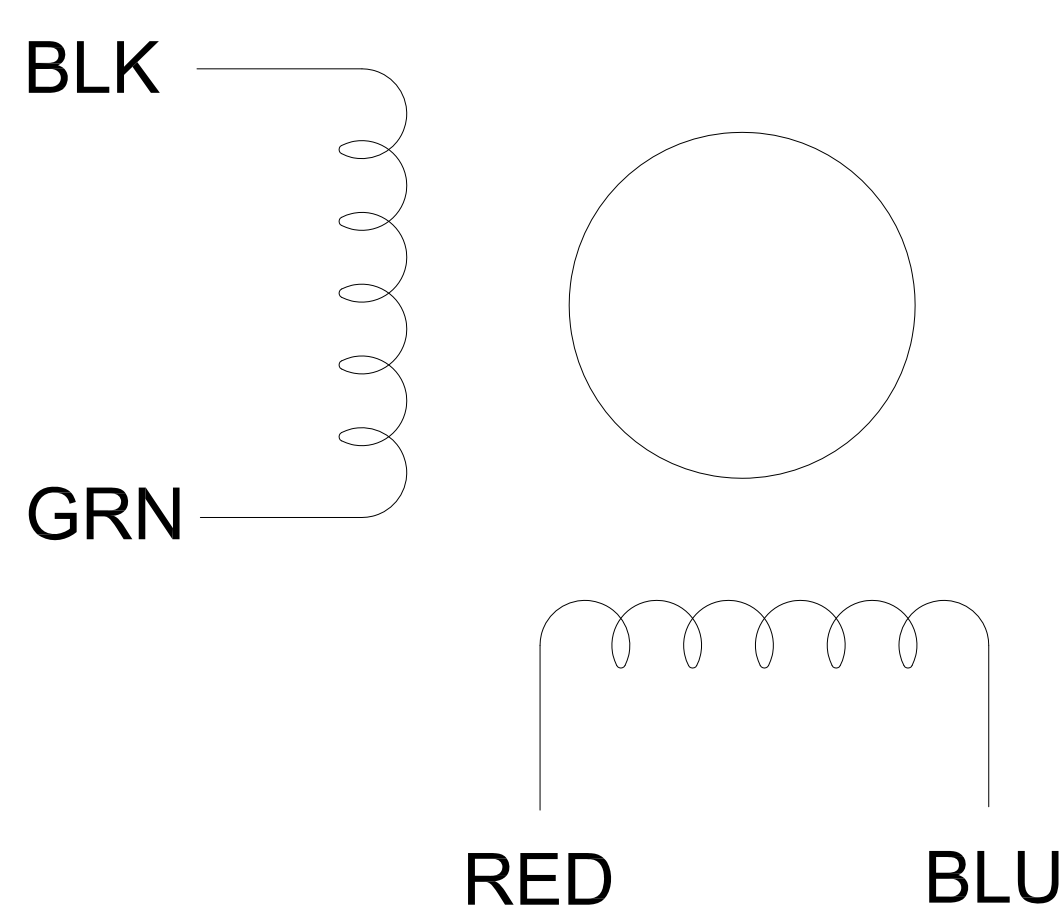

						23HS45-4204S			技术规格书	
										
标记	处数	分区	更改文件号	签名	日期	阶段标记	重量	比例		
设计			标准化						www.OMC-StepperOnline.com	
审核										
工艺			批准			共 张	第 张			