



EC750E

HIGH POST MATERIAL HANDLER

Sun & Shield

Specifications

KEY PERFORMANCE



Engine		
Engine	Volvo	D16J
Max. power at	r/min	1 800
Net, ISO 9249/SAE J1349	kW (hp)	392 (526)
Gross, ISO 14396/SAE J1995	kW (hp)	393 (527)
Max. torque	Nm	2 570
at engine speed	r/min	1 350
Hydraulic system		
Max. flow	l/min	2 x 450
Relief valve setting pressure		
Implement	MPa	33.8 / 35.8
Travel circuit	MPa	33.8
Swing circuit	MPa	26.5
Travel system		
Max. drawbar pull	kN	472
Max. travel speed (low/high)	km/h	2.9 / 4.6
Gradeability	°	
Swing system		
Max. swing speed	r/min	7
Max. swing torque	kNm	275.5

Service Refill		
Fuel tank	l	800
DEF/AdBlue® tank	l	80
Hydraulic system, total	l	655
Hydraulic tank	l	350
Engine oil	l	52
Engine coolant	l	66
Swing reduction unit	l	2 x 6.8
Travel reduction unit	l	2 x 13.5

Operating weight		
Boom length	m	12.6
Arm length	m	11.5
Factory CWT (modified)	Kg	15 100
Shoe width	mm	750
Operating weight (w/o attachment)	Kg	135,750

Max. Digging Force (ISO)		
Breakout force (bucket)	kN	
Tearout force (arm)	kN	

WORKING RANGES

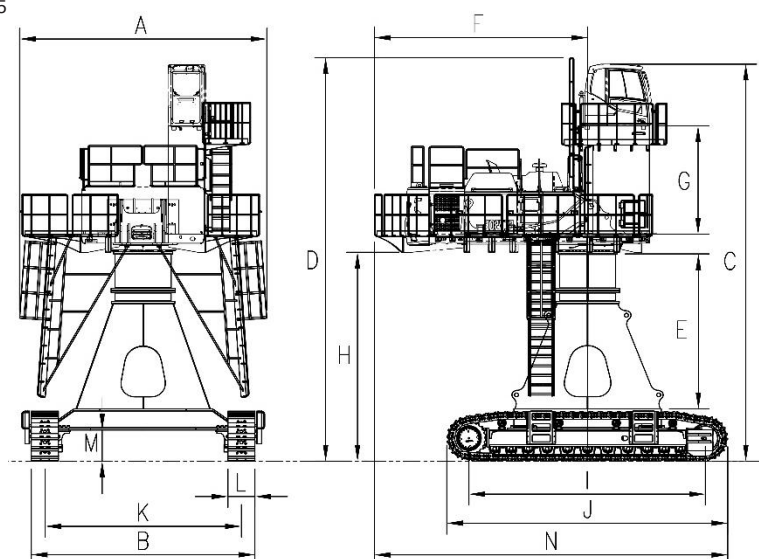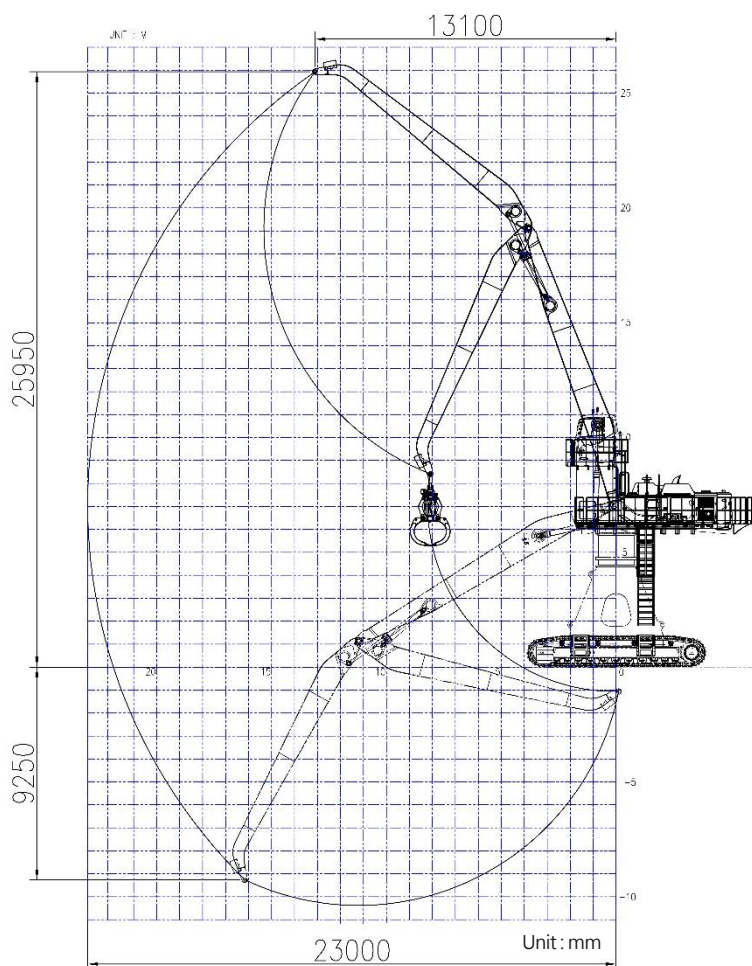

DIMENSIONS

Description	Unit	EC750E High Post Material Handler
Boom	m	12.6
Arm	m	11.5
A. Overall width of upper structure	mm	6 860
B. Overall width	mm	6 200
C. Overall height of cab	mm	11 010
D. Overall height of handrail	mm	11 200
E. Height of high post	mm	4 300
F. Tail swing radius	mm	5 920
G. Height of fixed cab	mm	3 000
H. Counterweight clearance*	mm	5 800
I. Tumbler length	mm	6 560
J. Track length	mm	7 800
K. Track gauge	mm	5 450
L. Shoe width	mm	750
M. Min. ground clearance*	mm	865
N. Overall length	mm	9 800



EC950E/F

HIGH POST MATERIAL HANDLER

Specifications

KEY PERFORMANCE



Engine		
Engine	Volvo	D16E
Max. power at	r/min	1 800
Net, ISO 9249/SAE J1349	kW (hp)	446 (606)
Gross, ISO 14396/SAE J1995	kW (hp)	450 (611)
Max. torque	Nm	2 650
at engine speed	r/min	1 350
Hydraulic system		
Max. flow	l/min	2 x 515
Relief valve setting pressure		
Implement	MPa	34.3 / 34.3
Travel circuit	MPa	34.3
Swing circuit	MPa	28.4
Travel system		
Max. drawbar pull	kN	565
Max. travel speed (low/high)	km/h	2.8 / 4.4
Gradeability	°	
Swing system		
Max. swing speed	r/min	6.9
Max. swing torque	kNm	343

Service Refill		
Fuel tank	l	1 265
PTO gear box	l	1 x 7.5
Hydraulic system, total	l	900
Hydraulic tank	l	460
Engine oil	l	55
Engine coolant	l	72
Swing reduction unit	l	2 x 6.5
Travel reduction unit	l	2 x 25

Operating weight		
Boom length	m	11.3
Arm length	m	11.3
Factory CWT (Add' CWT)	Kg	16 100 (6 000)
Shoe width	mm	900
Operating weight (w/ steel flat shoe)	Kg	115,300

Max. Digging Force (ISO)		
Breakout force (bucket)	kN	
Tearout force (arm)	kN	

WORKING RANGES

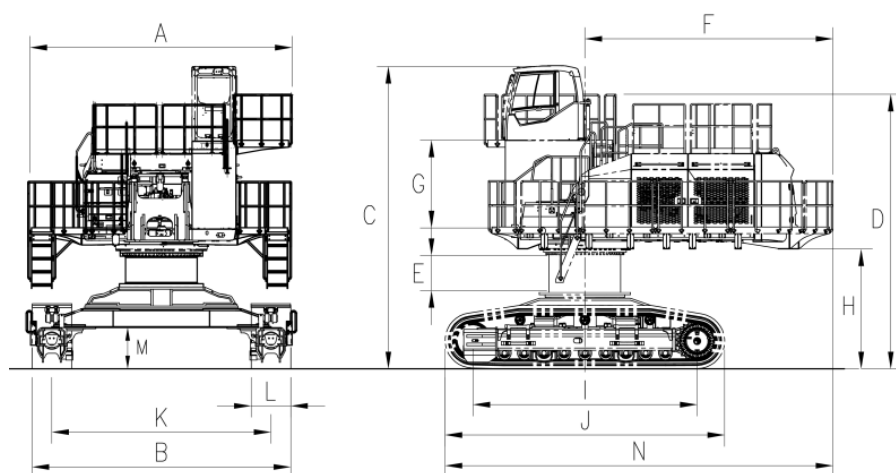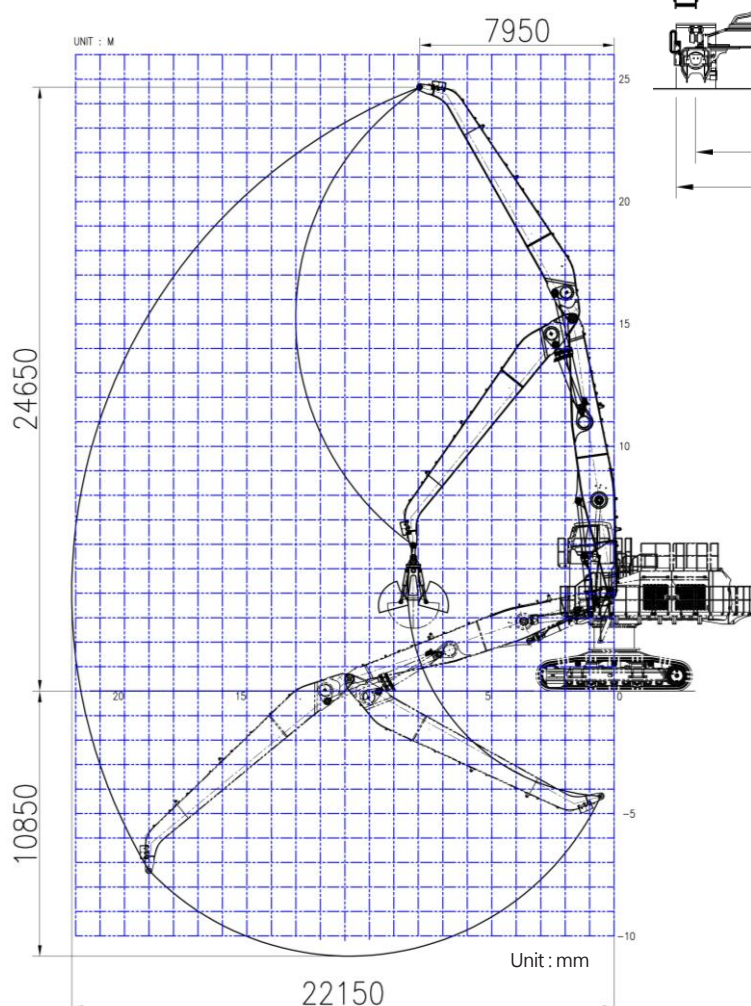

DIMENSIONS

Description	Unit	EC950E/F High Post Material Handler
Boom	m	11.3
Arm	m	11.3
A. Overall width of upper structure	mm	5 980
B. Overall width	mm	5 900
C. Overall height of cab	mm	6 900
D. Overall height of handrail	mm	6 260
E. Height of high post	mm	800
F. Tail swing radius	mm	5 700
G. Height of fixed cab	mm	2 000
H. Counterweight clearance*	mm	2 730
I. Tumbler length	mm	5 120
J. Track length	mm	6 380
K. Track gauge	mm	5 000
L. Shoe width	mm	900
M. Min. ground clearance*	mm	960
N. Overall length	mm	8 900