



EC750E

HIGH POST MATERIAL HANDLER

Specifications

KEY PERFORMANCE

Engine

Engine	Volvo	D16J
Max. power at	r/min	1 800
Net, ISO 9249/SAE J1349	kW (hp)	392 (526)
Gross, ISO 14396/SAE J1995	kW (hp)	393 (527)
Max. torque	Nm	2 570
at engine speed	r/min	1 350

Hydraulic system

Max. flow	l/min	2 x 450
Relief valve setting pressure		
Implement	MPa	33.8 / 35.8
Travel circuit	MPa	33.8
Swing circuit	MPa	26.5

Travel system

Max. drawbar pull	kN	472
Max. travel speed (low/high)	km/h	2.9 / 4.6
Gradeability	°	

Swing system

Max. swing speed	r/min	7
Max. swing torque	kNm	275.5

Service Refill

Fuel tank	l	800
DEF/AdBlue® tank	l	80
Hydraulic system, total	l	655
Hydraulic tank	l	350
Engine oil	l	52
Engine coolant	l	66
Swing reduction unit	l	2 x 6.8
Travel reduction unit	l	2 x 13.5



Operating weight

Boom length	m	12.6
Arm length	m	11.5
Factory CWT (modified)	Kg	15 100
Shoe width	mm	750
Operating weight (w/o attachment)	Kg	135,750

Max. Digging Force (ISO)

Breakout force (bucket)	kN	
Tearout force (arm)	kN	

WORKING RANGES

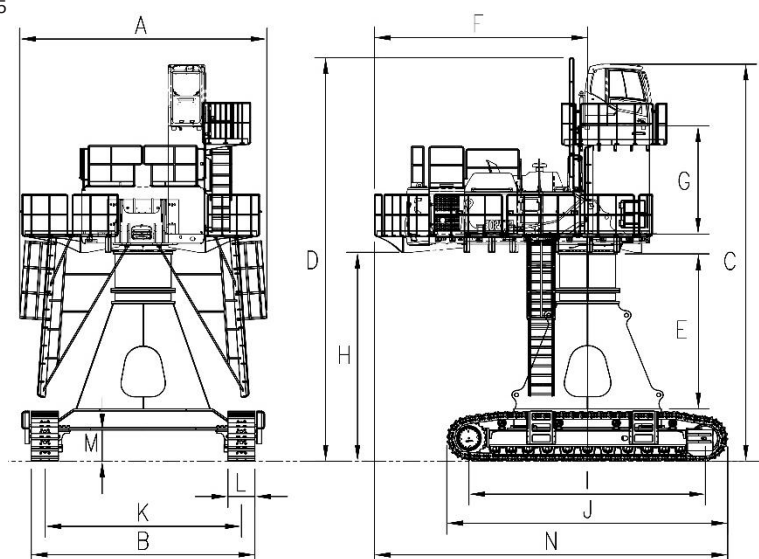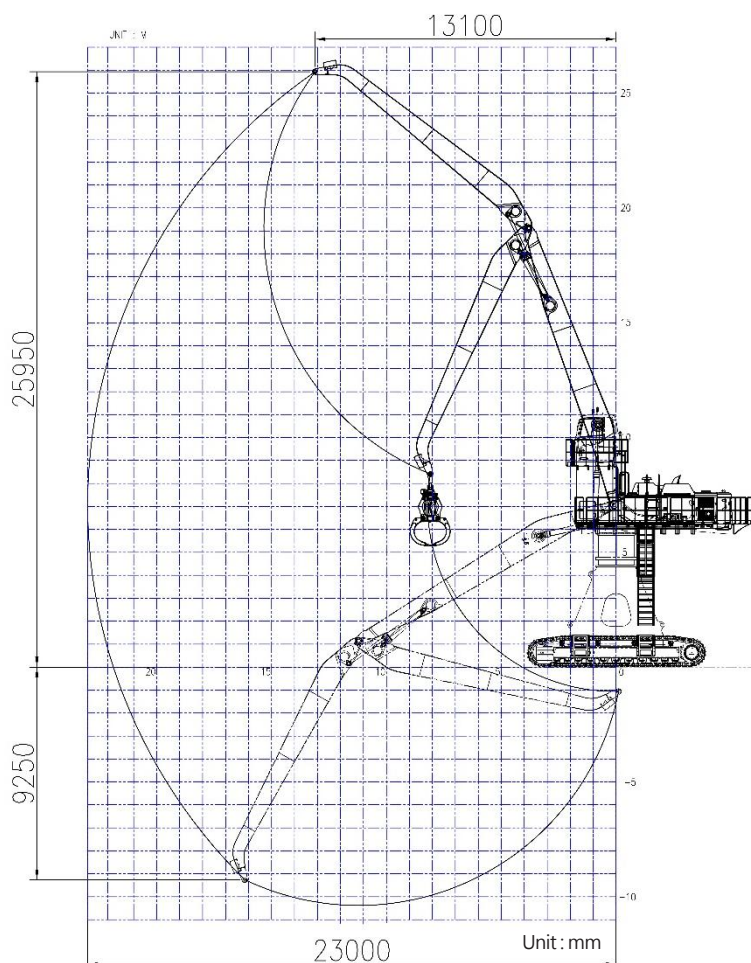

DIMENSIONS

Description	Unit	EC750E High Post Material Handler
Boom	m	12.6
Arm	m	11.5
A. Overall width of upper structure	mm	6 860
B. Overall width	mm	6 200
C. Overall height of cab	mm	11 010
D. Overall height of handrail	mm	11 200
E. Height of high post	mm	4 300
F. Tail swing radius	mm	5 920
G. Height of fixed cab	mm	3 000
H. Counterweight clearance*	mm	5 800
I. Tumbler length	mm	6 560
J. Track length	mm	7 800
K. Track gauge	mm	5 450
L. Shoe width	mm	750
M. Min. ground clearance*	mm	865
N. Overall length	mm	9 800