


구성도:

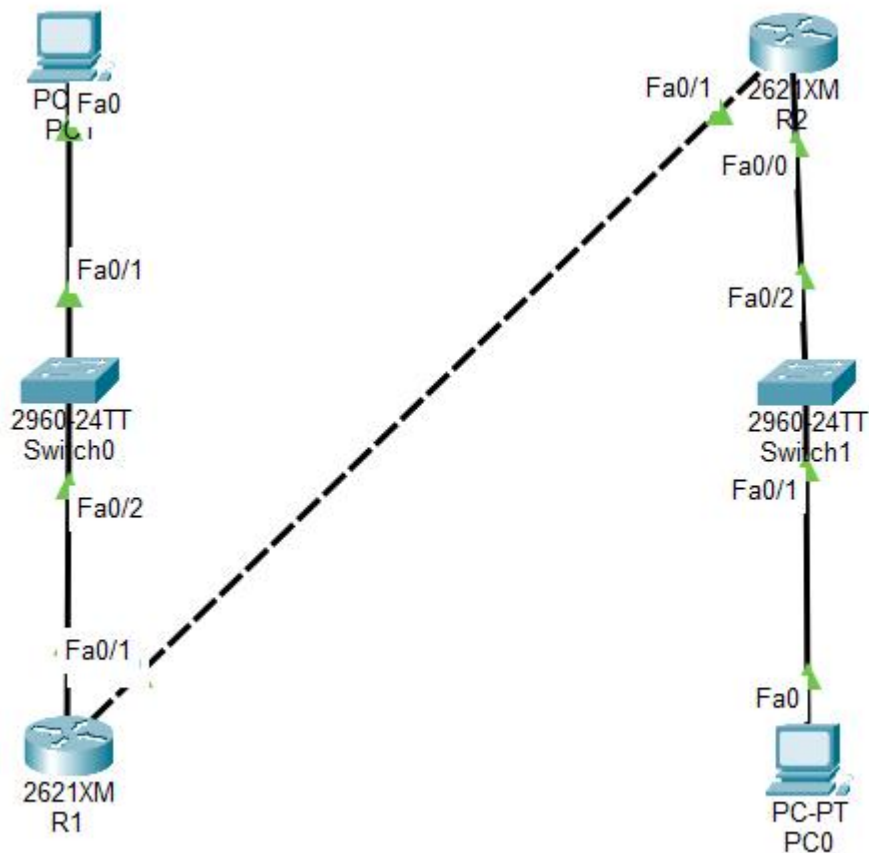

지사에서 본사연결 확인(ping)해봤을 때 연결 실패.

```
C:\>ping 192.168.0.10

Pinging 192.168.0.10 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.0.10:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

그래서 tracert를 수행해보았다.

```
C:\>tracert 192.168.0.10

Tracing route to 192.168.0.10 over a maximum of 30 hops:

  1  *          *          *          Request timed out.
```

원인: 두 라우터가 서로의 LAN 네트워크를 모르기 때문에 정적 라우팅을 추가해준다.

R1에는 ip route 192.168.1.0 255.255.255.0 10.0.0.2

R2에는 ip route 192.168.0.0 255.255.255.0 10.0.0.1

그래서 정적 라우팅 설정 해주면

R1.

```
Router#sh ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

    10.0.0.0/30 is subnetted, 1 subnets
C       10.0.0.0 is directly connected, FastEthernet0/1
C       192.168.0.0/24 is directly connected, FastEthernet0/0
S       192.168.1.0/24 [1/0] via 10.0.0.2
```

R2.

```
Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

    10.0.0.0/30 is subnetted, 1 subnets
C       10.0.0.0 is directly connected, FastEthernet0/1
S       192.168.0.0/24 [1/0] via 10.0.0.1
C       192.168.1.0/24 is directly connected, FastEthernet0/0
```

```
C:\>ipconfig

FastEthernet0 Connection:(default port)

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address.....: FE80::206:2AFF:FE72:3E1
    IPv6 Address.....: ::
    IPv4 Address.....: 192.168.1.10
    Subnet Mask.....: 255.255.255.0
    Default Gateway.....: ::
                           192.168.1.1

Bluetooth Connection:

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address.....: ::
    IPv6 Address.....: ::
    IPv4 Address.....: 0.0.0.0
    Subnet Mask.....: 0.0.0.0
    Default Gateway.....: ::
                           0.0.0.0

C:\>ping 192.168.0.10

Pinging 192.168.0.10 with 32 bytes of data:

Reply from 192.168.0.10: bytes=32 time<1ms TTL=126
Reply from 192.168.0.10: bytes=32 time<1ms TTL=126
Reply from 192.168.0.10: bytes=32 time<1ms TTL=126
Reply from 192.168.0.10: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

이제 지사PC에서 본사로 ping을 다시 보내보면 ping이 잘 넘어가는 것을 확인할 수 있다.