

RTTY Contesting


using Yaesu FT-710, N1MM and MMTTY

Andrzej Mazur, SP5GW

MMTTY Setup (1)

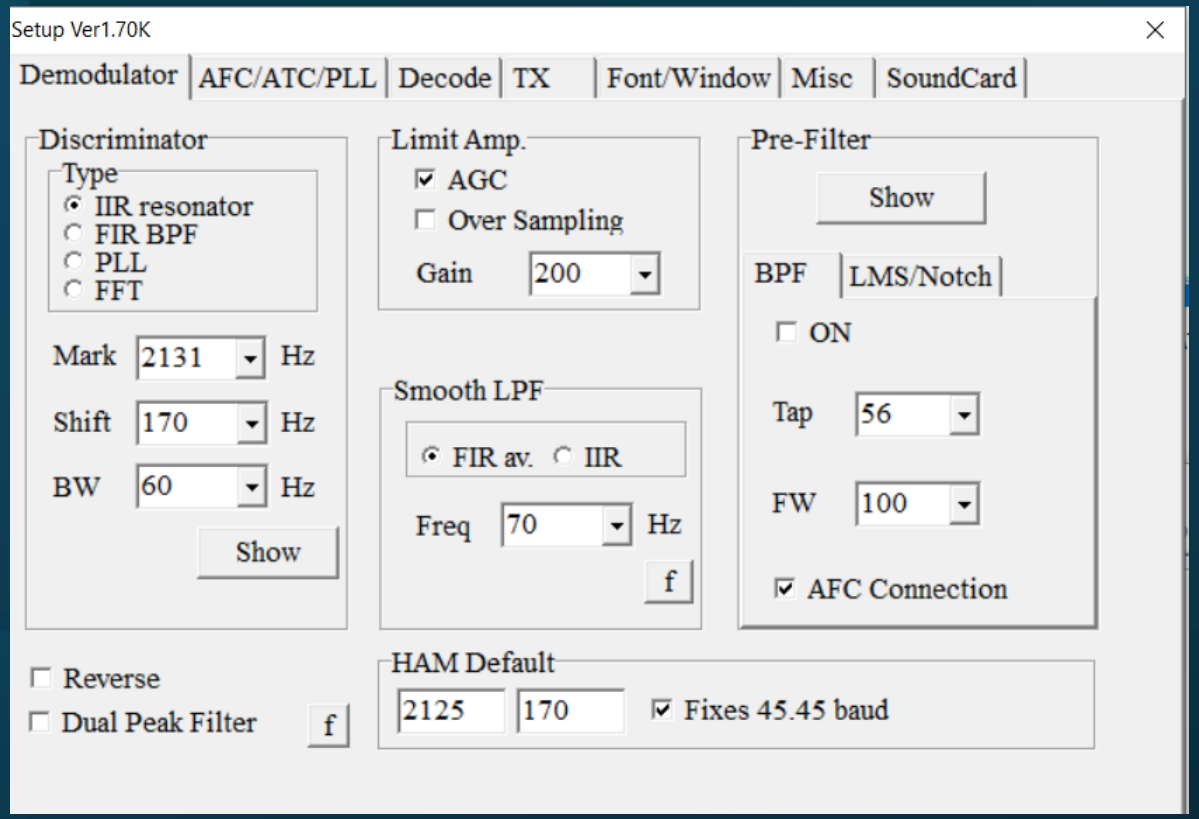


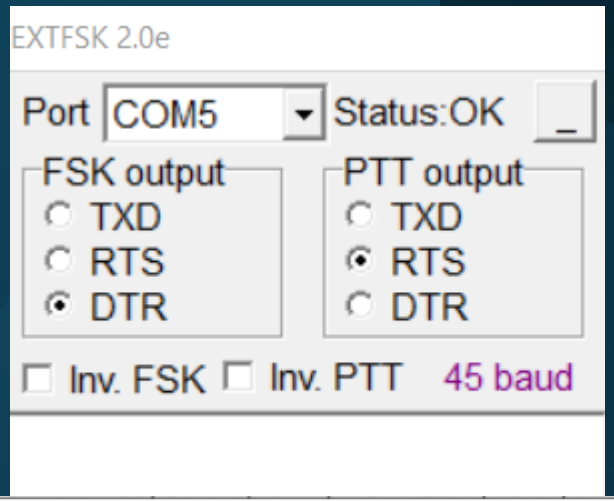


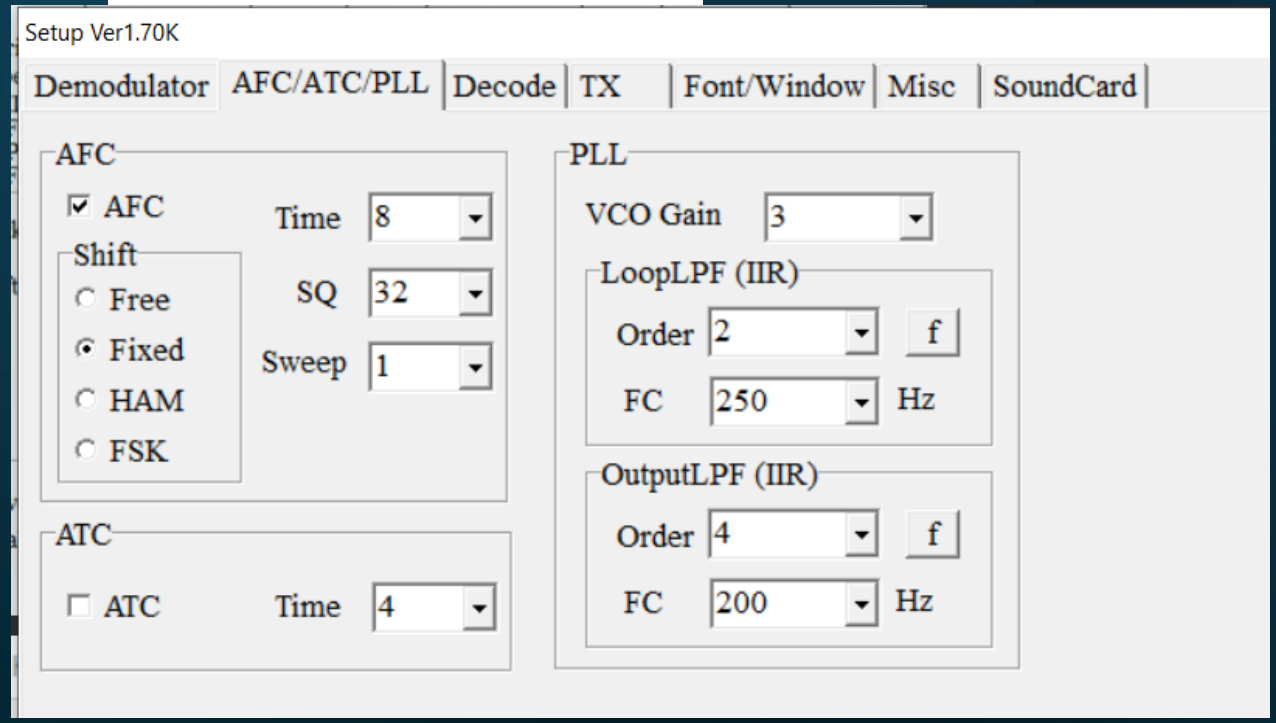

Curtuasy: Kamil, SP5MTX


MMTTY Setup (2)

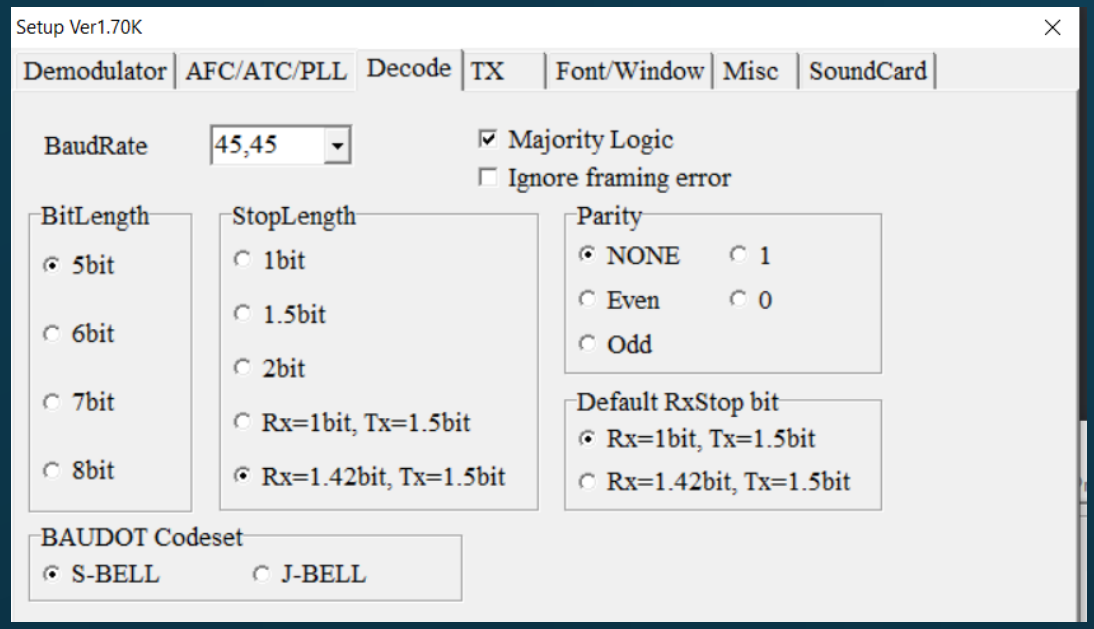


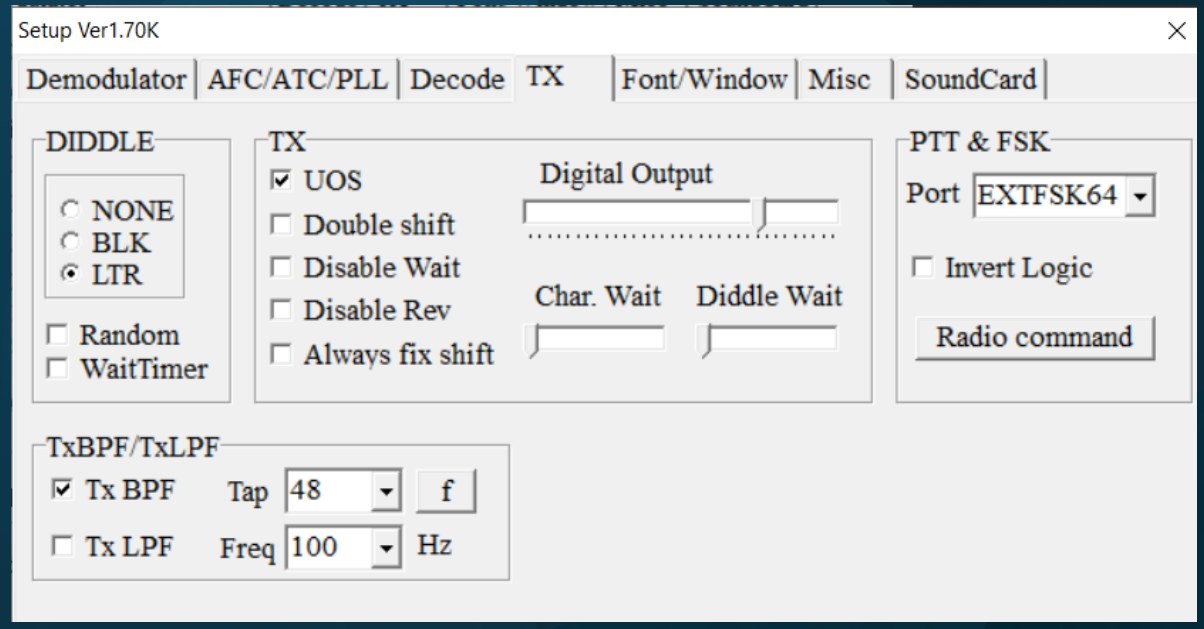


Curtuasy: Kamil, SP5MTX

MMTTY Setup (3)

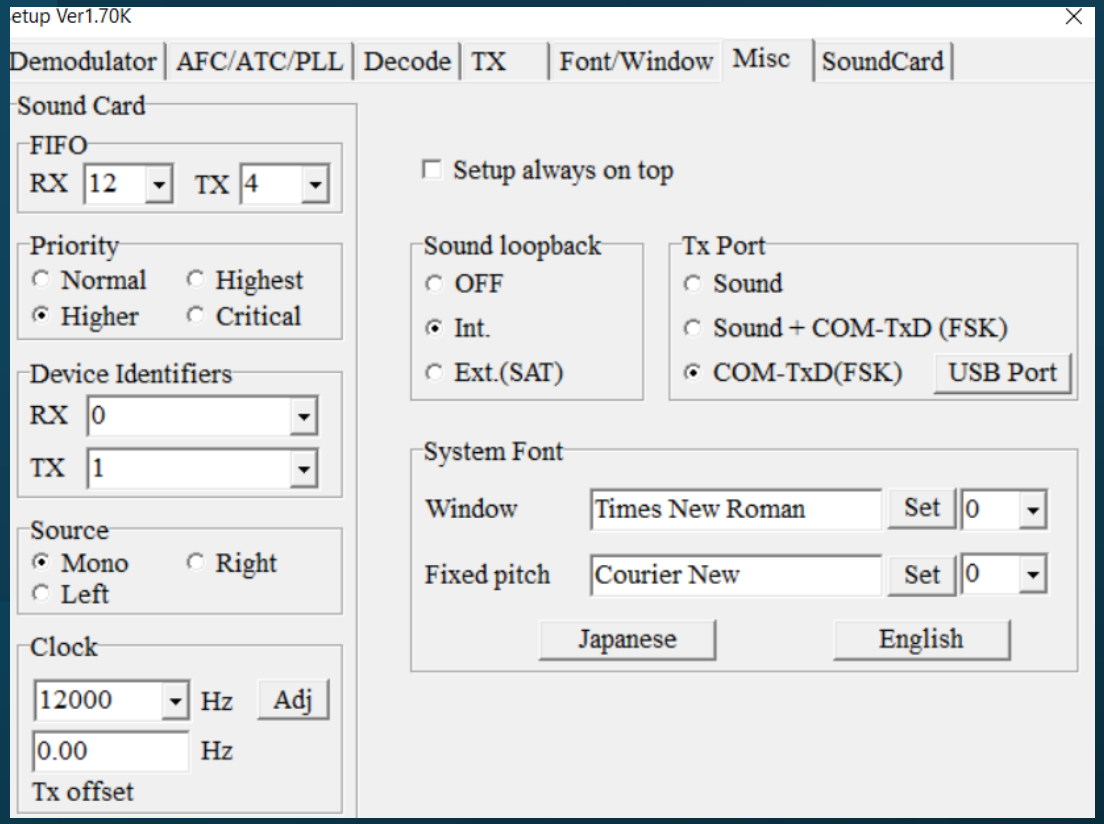


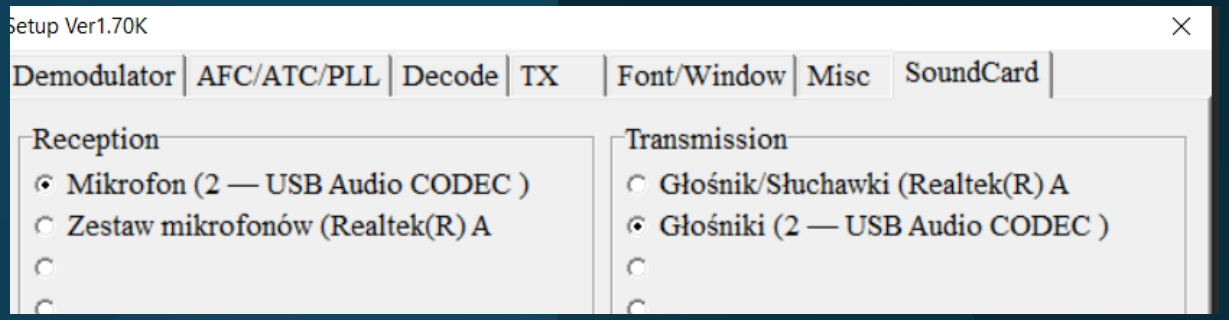


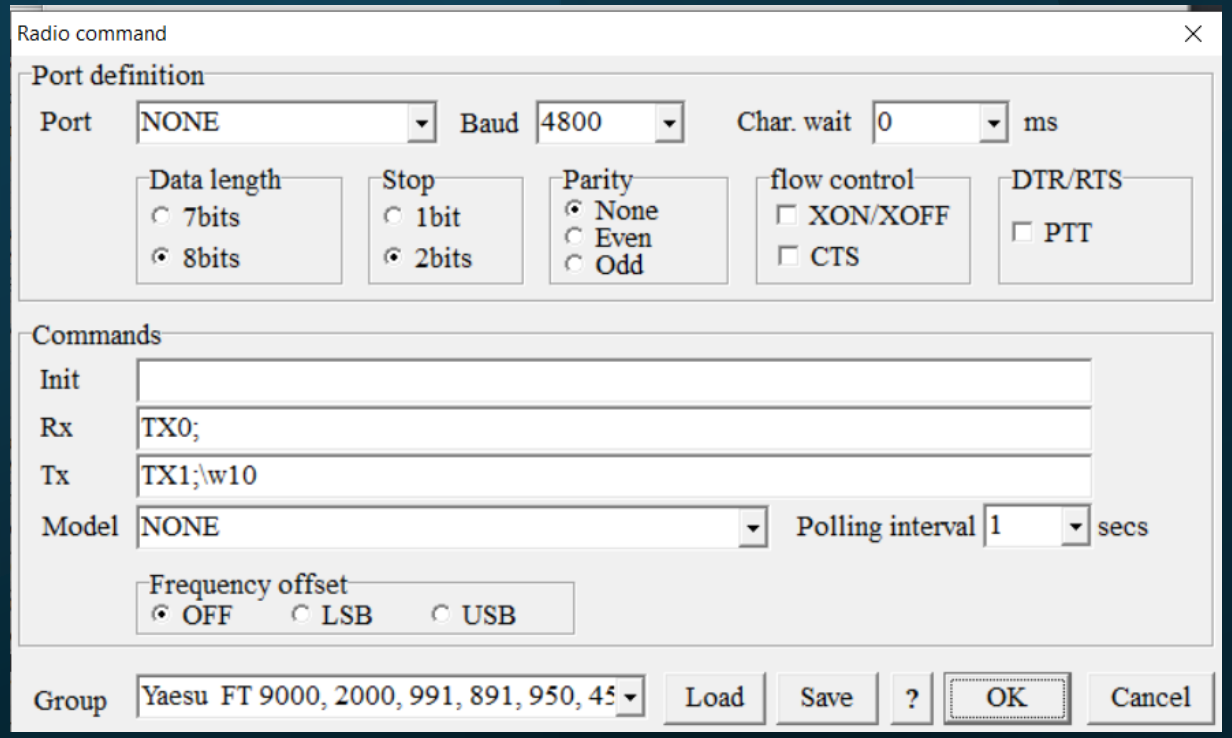

Curtuasy: Kamil, SP5MTX

Integration FT-710 – MMTTY - N1MM Logger

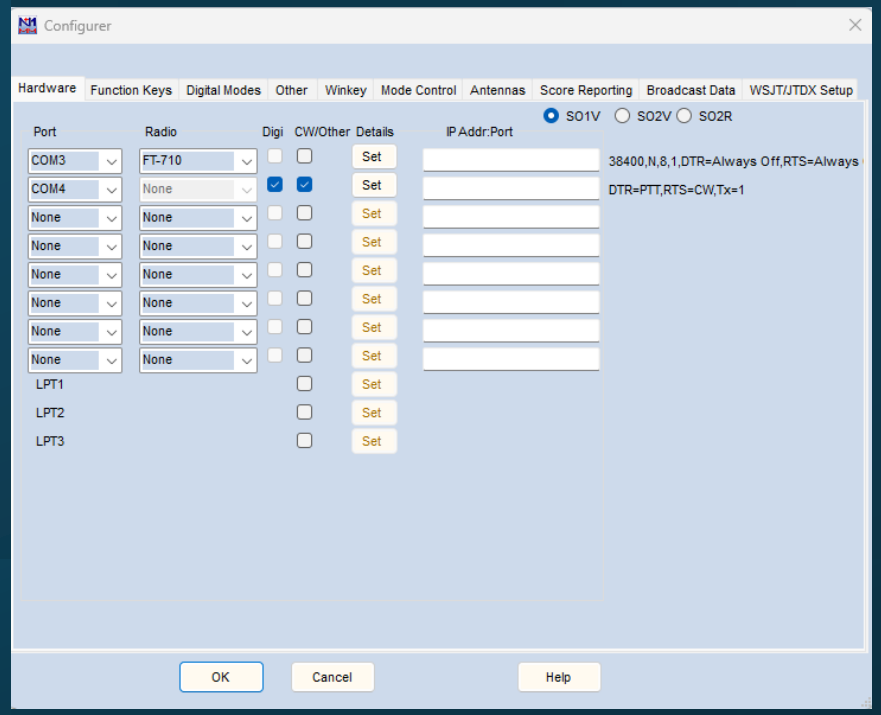

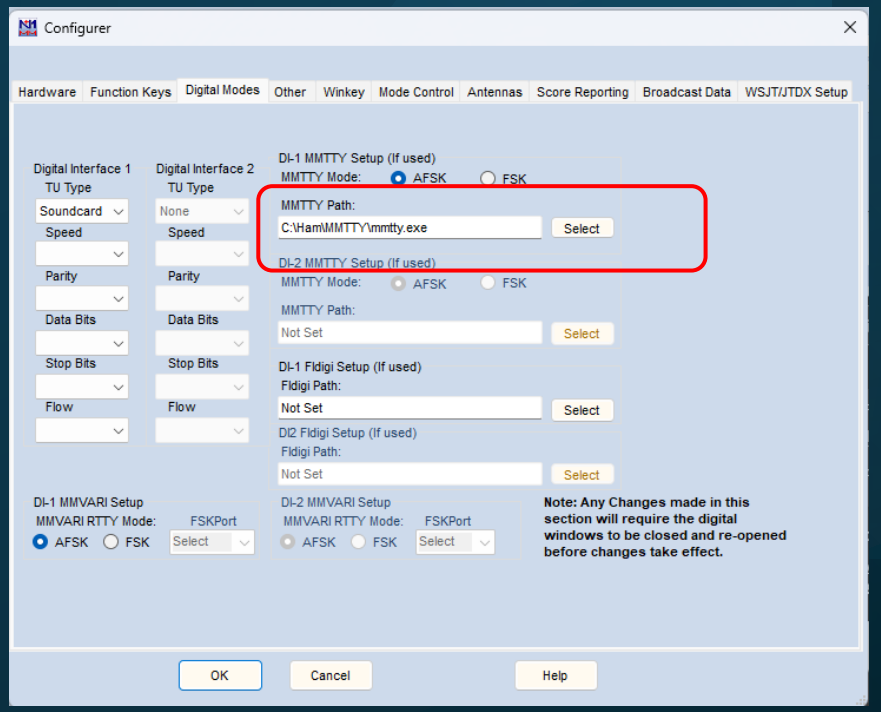



N1MM Database Configurator

Contest used as illustration: CQ WW RTTY


Right click on any of the macro buttons to launch macro editor
(diffault macros are loaded as part of contest config.)

File -> New Log in DB

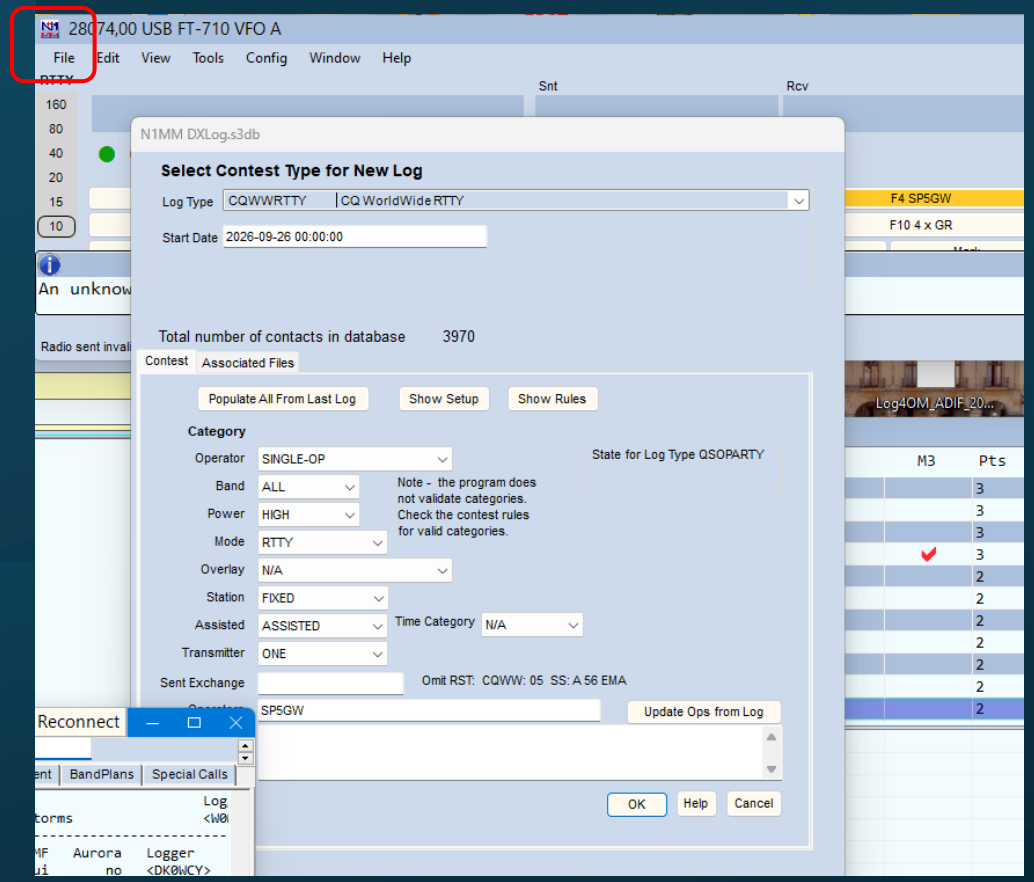

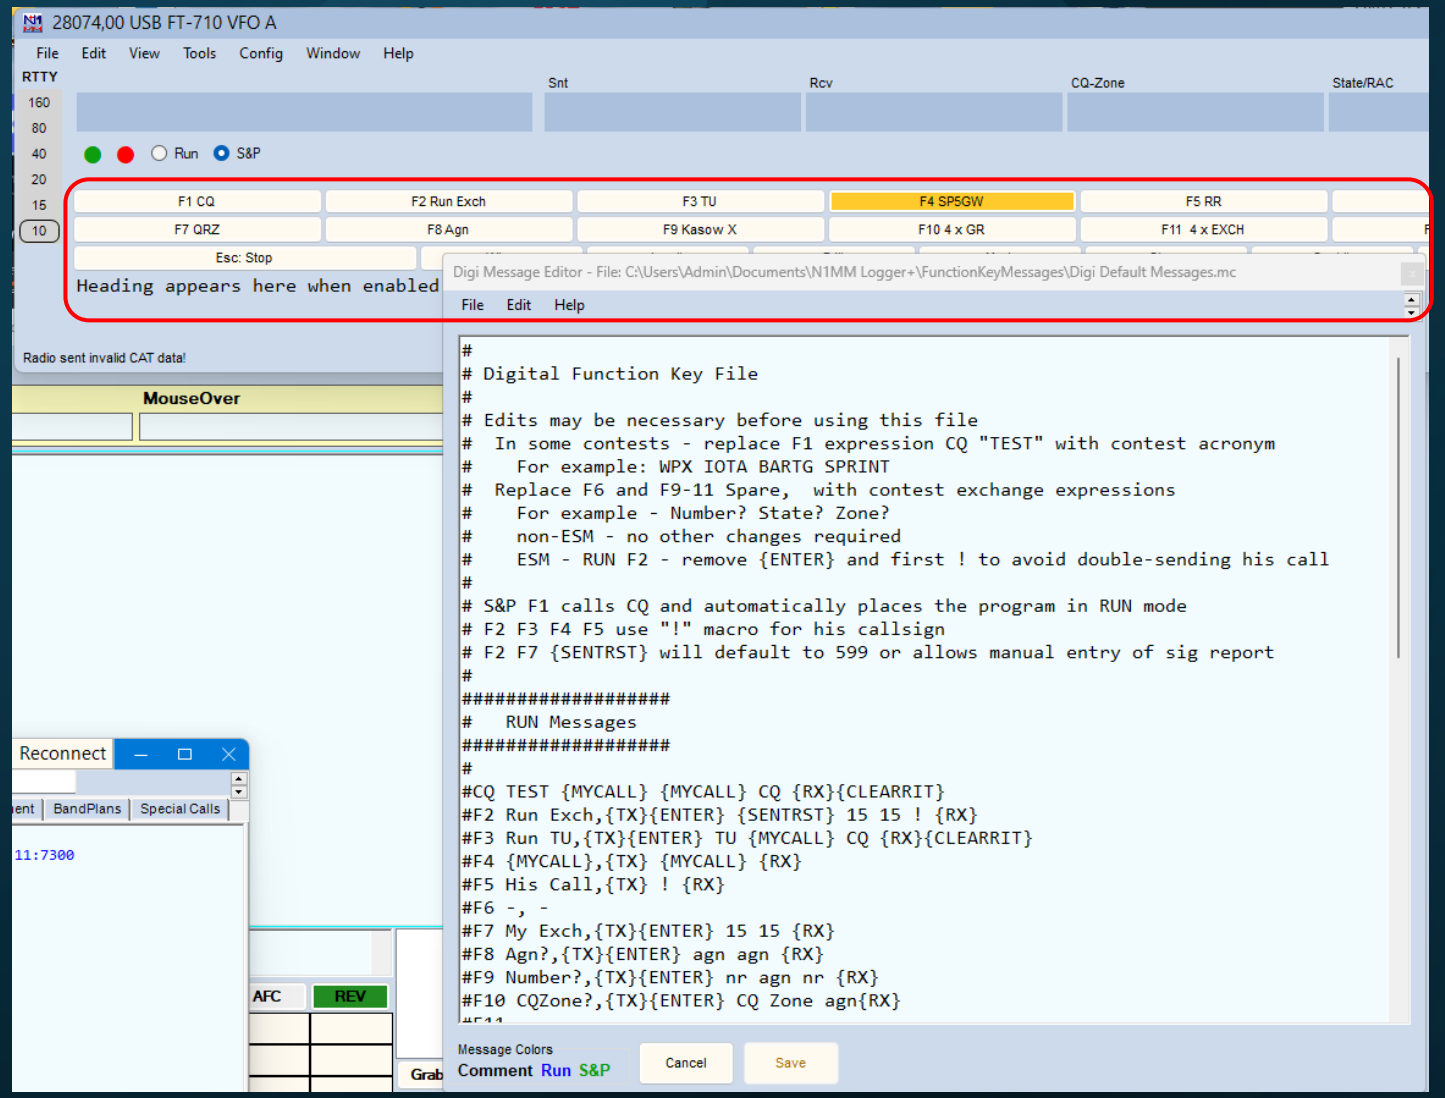


Tunning to the station

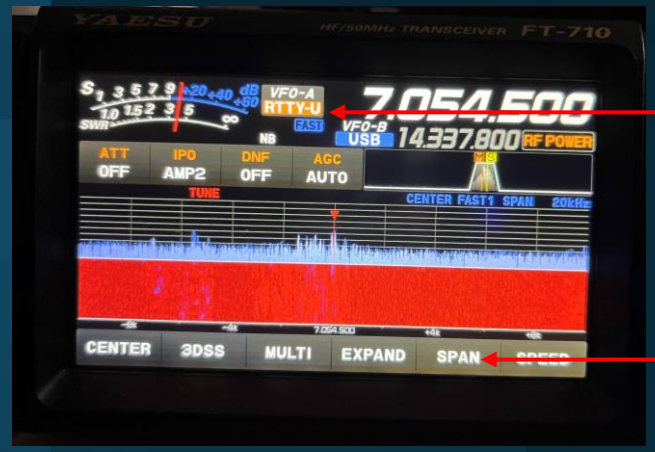



1. Open N1MM logger
2. Go to Window - > Digital Interface (this shall open MMTTY)
3. Switch FT-710 to mode: RTTY-U (rearly you will see RTTY-L being used)
4. It is helpful to change raio's waterfall span to about 20k
5. Tune to the station so you can see signal spectrum as on bottom-right of the picture.
6. Now botm-left window shall start filling with decoded messages
7. During contest use macro keys as described on next two slides to complete qso

Responding to CQ

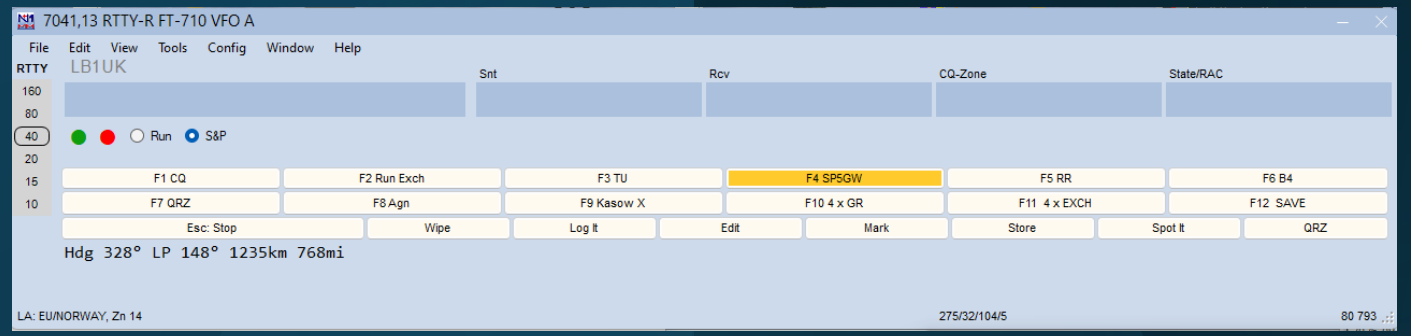

1. IB9R: **CQ IB9R IB9R TEST** (You listen for this msg)
   CQ TEST IB9R IB9R TEST CQ

2. SP5GW: **SP5GW SP5GW SP5GW** (Press macro F4 SP5GW)

3. IB9R: **SP5GW 599 15 15 IB9R** or (You listen for his response)
   SP5GW 599 15 15 SP5GW or
   IB9R DE SP5GW 599 15 15

4. SP5GW: **IB9R 599 15 15 SP5GW** (Press macro F2 Run Exch)

5. IB9R: **SP5GW TU IB9R TEST** or (He finalizes the qso)
   SP5GW TU IB9R CQ or
   SP5GW TU DE IB9R QRZ? or
   SP5GW TU NOW OL1Z 599 15 15

IB9R is your corespondent
SP5GW is your call sign in this example
Messages given in smaller text are variations of the main message.

Calling CQ

- SP5GW: CQ SP5GW SP5GW TEST
- IB9R: IB9R IB9R IB9R
- SP5GW: IB9R 599 15 15 SP5GW
- IB9R: SP5GW 599 15 15 IB9R
- SP5GW: IB9R TU SP5GW TEST

SP5GW is your call sign in this example
IB9R is your corespondent

Thank you!

sp5gw@hotmail.com