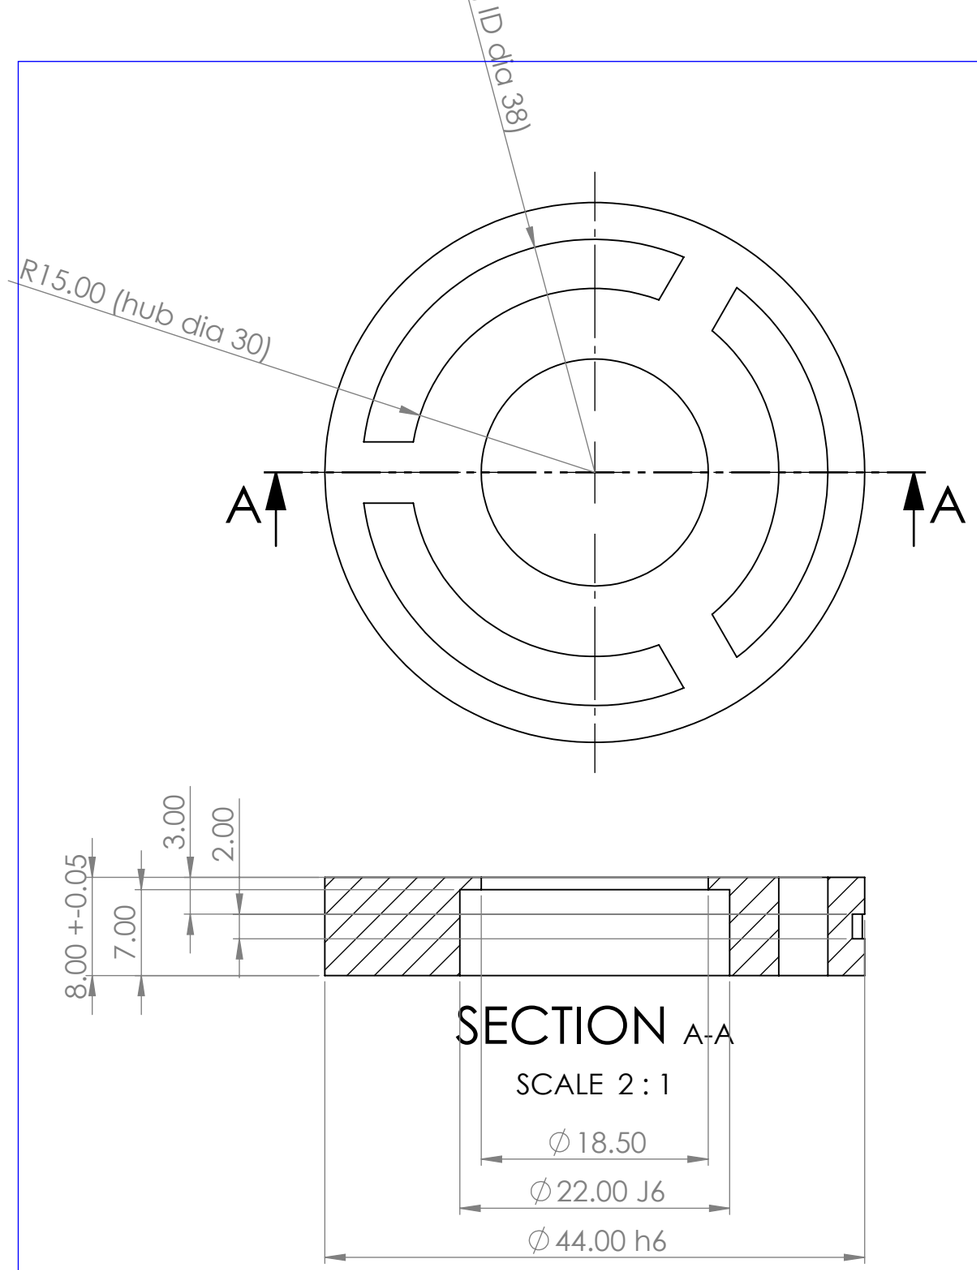

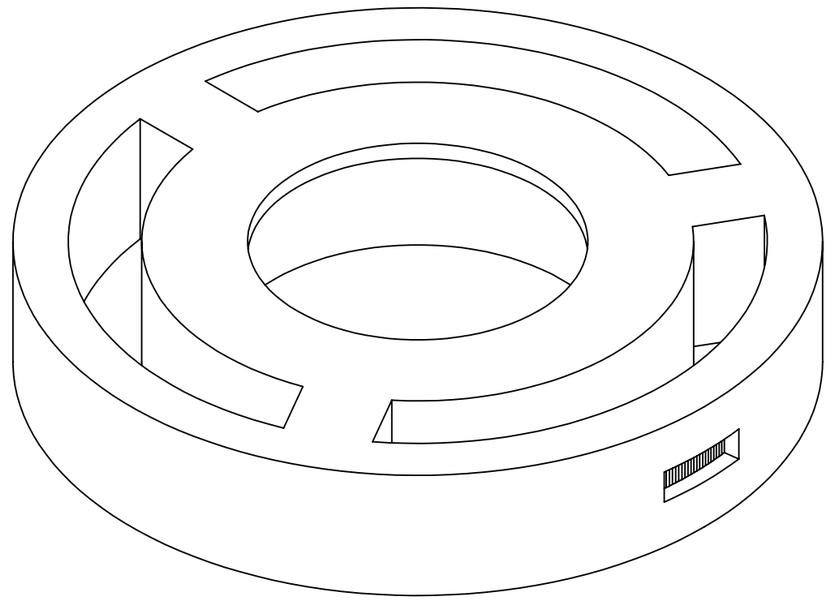

6061-T6, clear anodise, bearing bore masked. OD and bearing bore in ONE lathe setup; spokes on a mill.
3 spokes 5.0 wide, full 8 thick, at 60/180/300 deg (between the dial spokes). Bearing seat 22 J6 x 7 from the bottom onto a 1.0 lip.
Screw groove on the OD at 0 deg: 15 deg arc, 2.0 wide, 1.0 deep, centred 4.0 below the top face (M4 tip sits in it).
Runout: bearing seat 0.005 to OD; top face perpendicular 0.01 to OD.
General tolerance ISO 2768-mK, linear +-0.1, angles +-0.5 deg; all edges 0.3x45; Ra 1.6 on fits, 3.2 elsewhere.

grindmn bridge (part 2) - machining

grindmn_bridge | projects/grindmn/requirements.md section 5.2
Scale 2:1 (iso 3:1) mm 3rd angle

2026-11-06

SOLIDWORKS Educational Product. For Instructional Use Only.