

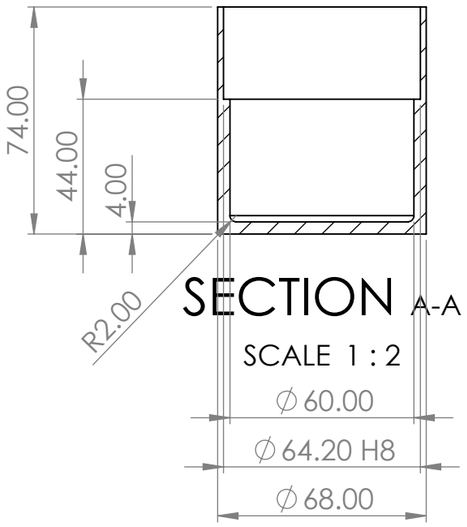

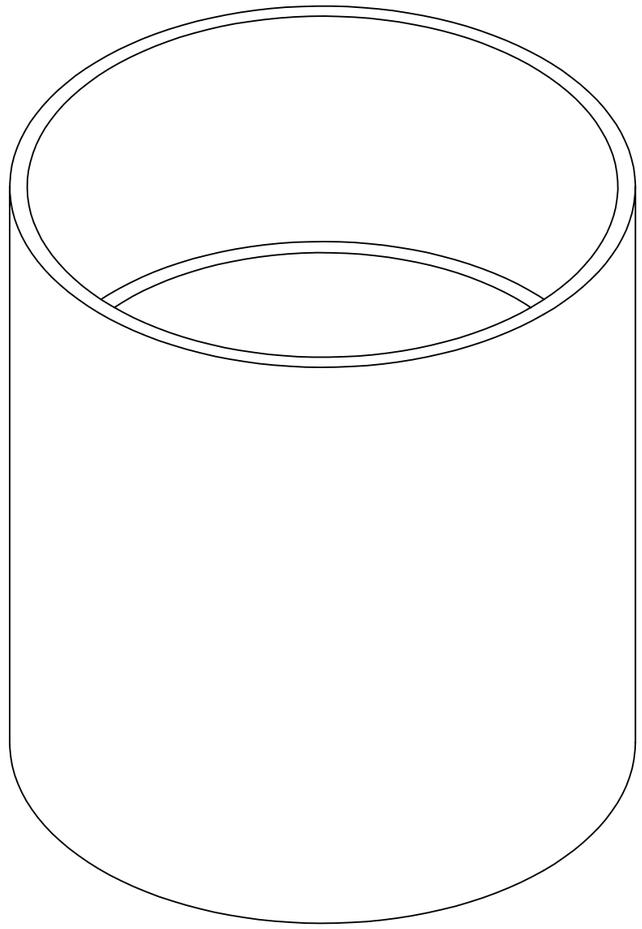

6061-T6, bead blast, clear anodise. Sleeve bore 64.20 H8 (+0.046/0) x 30 deep from the rim; chamber 60 x 40 (about 110 ml).
Rim: 1.0 x 30 deg lead-in so the O-ring is not cut. Inside base corner R2.
Base: etch grindmn mark, model version, build date, serial, 16.7 um / click (Plex Mono).
General tolerance ISO 2768-mK, linear +-0.1, angles +-0.5 deg; all edges 0.3x45; Ra 1.6 on fits, 3.2 elsewhere.

grindmn catch cup (part 9) - machining

grindmn_catch_cup | projects/grindmn/requirements.md section 5.9
Scale 1:2 (iso 1.5:1) mm 3rd angle

2026-11-06

SOLIDWORKS Educational Product. For Instructional Use Only.