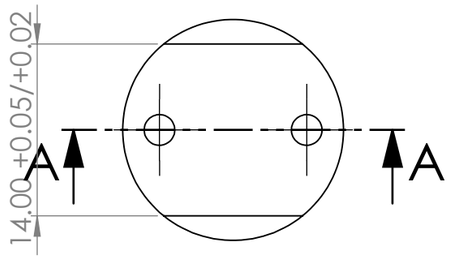

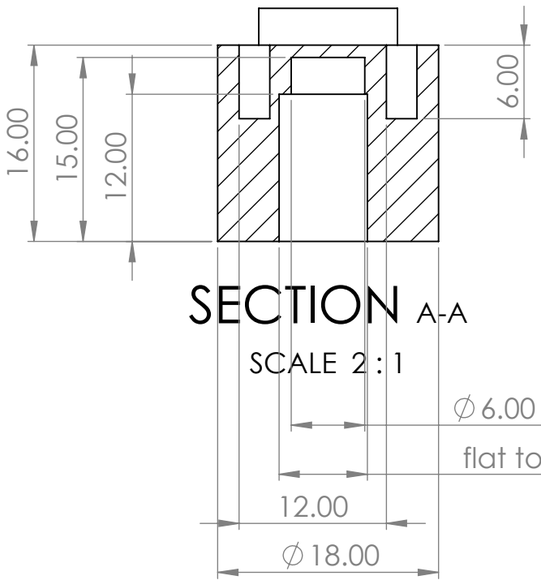

SECTION A-A

SCALE 2 : 1

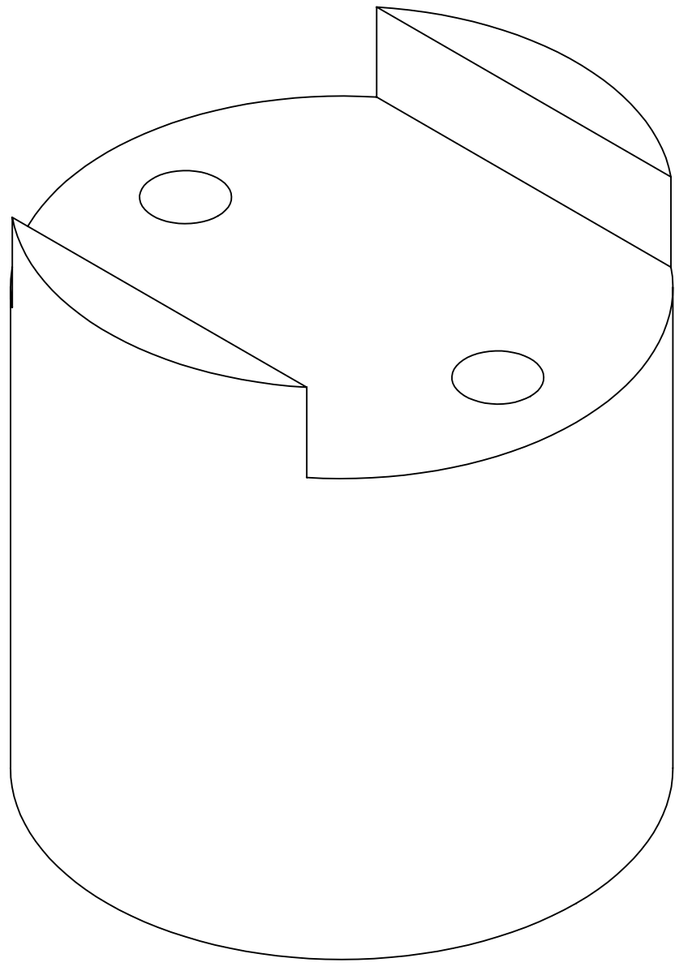

6061-T6, clear anodise, bore masked. Height 19.0.
Bore dia 8 H8 (+0.022/0) with a flat at 7.20, 12 deep; magnet pocket dia 6 P7 x 3 continues it (or Loctite 638).
Arm slot 14 wide x 3 deep across the top (floor at 16). 2x M3 tapped 6 deep from the slot floor, 12 apart on the slot axis.
General tolerance ISO 2768-mK, linear +-0.1, angles +-0.5 deg; all edges 0.3x45; Ra 1.6 on fits, 3.2 elsewhere.

grindmn crank hub (part 6) - machining

grindmn_crank_hub | requirements.md 5.5, slot 14
Scale 2:1 (iso 6:1) mm 3rd angle

2026-11-06

SOLIDWORKS Educational Product. For Instructional Use Only.