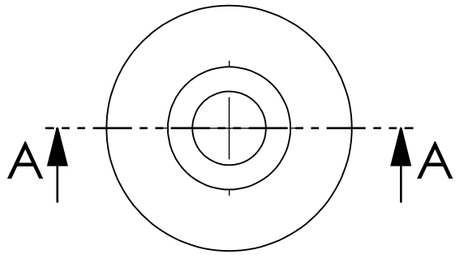


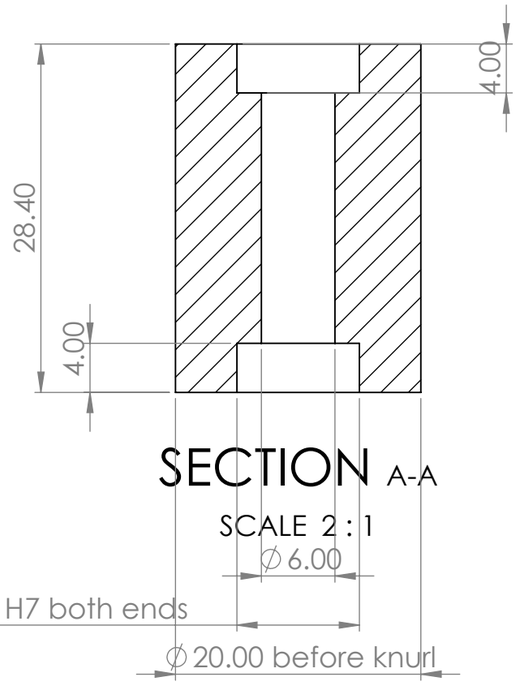


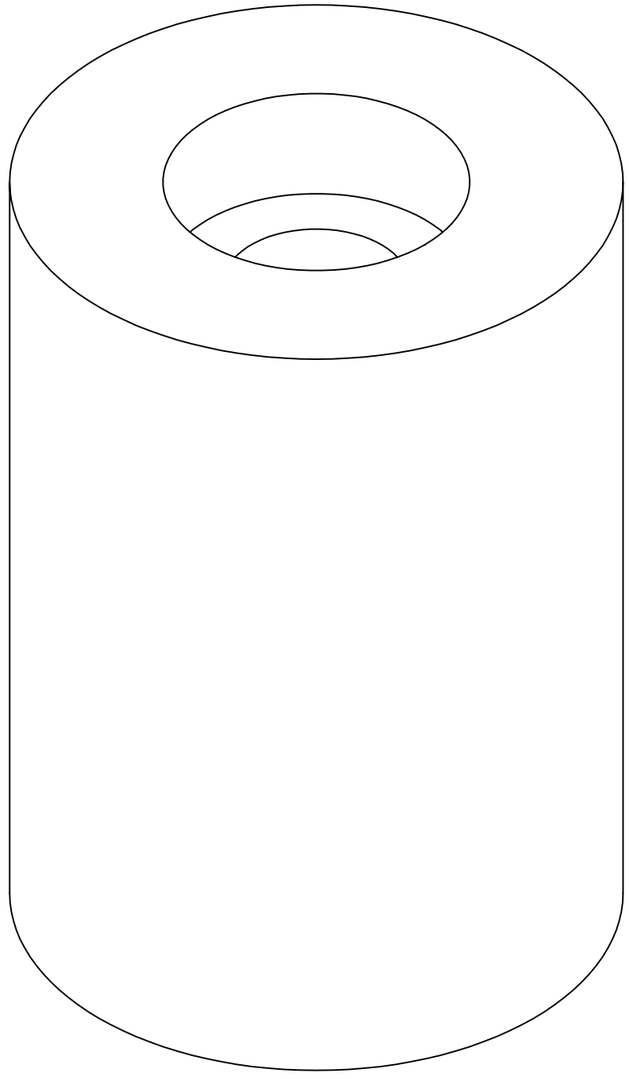

6061-T6, diamond knurl 0.8 pitch on the grip, clear anodise. Two MF105ZZ flanged bearings, one in each end bore.
General tolerance ISO 2768-mK, linear +-0.1, angles +-0.5 deg; all edges 0.3x45; Ra 1.6 on fits, 3.2 elsewhere.

# grindmn crank knob (part 7) - machining

grindmn_crank_knob | requirements.md 5.7, length 28.4
Scale 2:1 (iso 5:1) mm 3rd angle

2026-11-06

**SOLIDWORKS Educational Product. For Instructional Use Only.**