

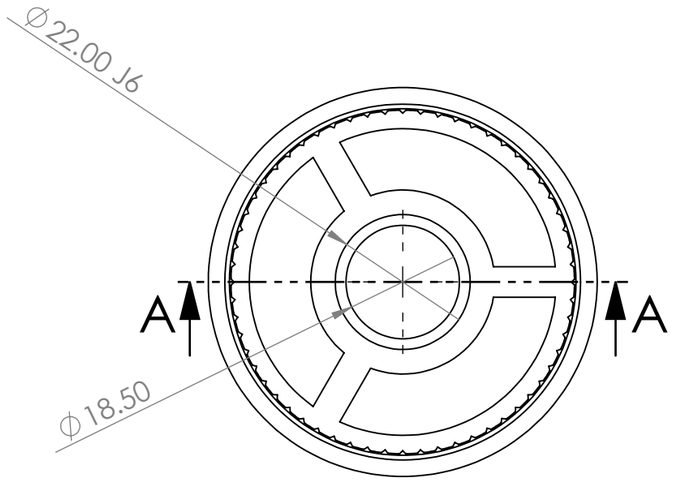


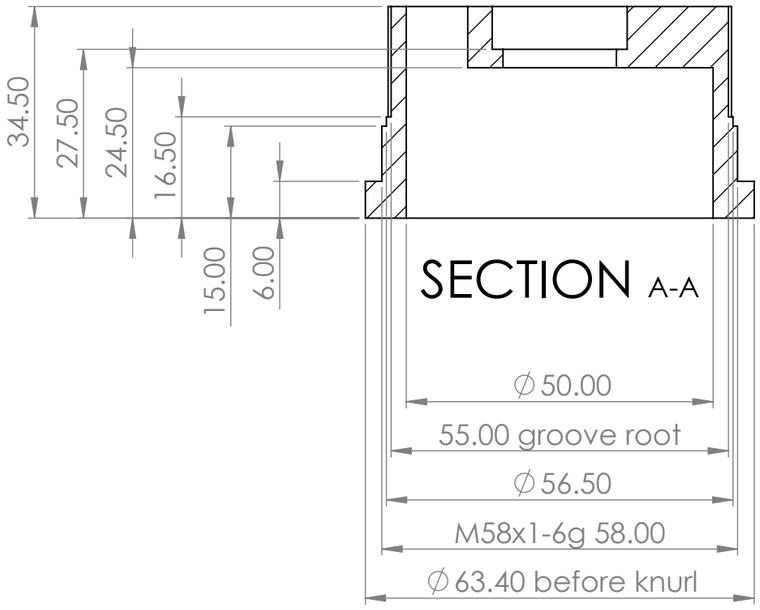

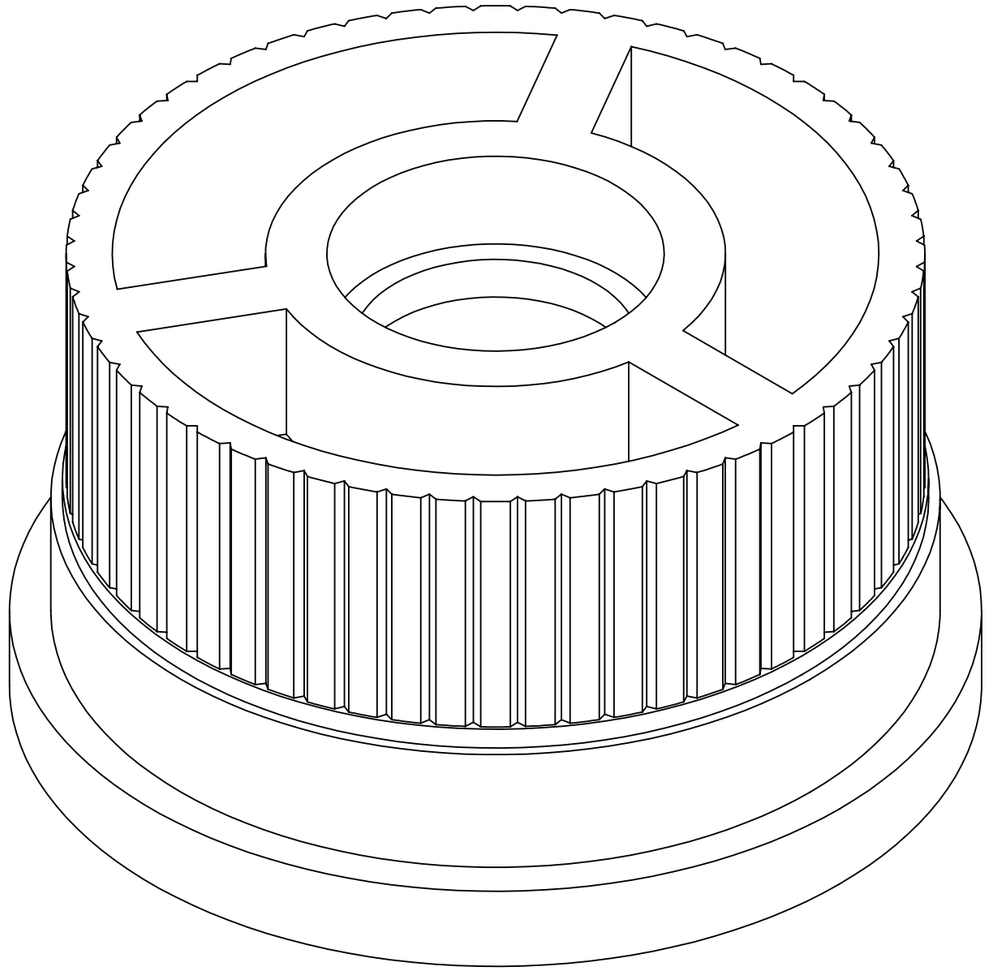

303 stainless. Thread, pilot and bearing seat in ONE lathe setup; spokes and grooves on a mill with rotary axis. Bead blast, passivate.
Pilot dia 56 h5 (0/-0.013) measured across the lands. 60 axial V-grooves, 90 deg incl., 0.5 deep, 6.000 deg pitch (+-0.05), z 16.5..34.5.
Thread M58x1-6g external, right-hand single-start. Bearing seat 22 J6 (+0.008/-0.005), 7 deep from the top, on the 18.5 lip.
3 spokes 5.0 wide x 10 tall at 0/120/240 deg join the hub (OD 30) to the ring (z 24.5..34.5).
Runout to pilot: bearing seat 0.005, thread pitch dia 0.03. Lip face perpendicular 0.01 to pilot.
Flange: diamond knurl 0.8 pitch; 60-line scale etched on its chamfer.
General tolerance ISO 2768-mK, linear +-0.1, angles +-0.5 deg; all edges 0.3x45; Ra 1.6 on fits, 3.2 elsewhere.

grindmn grind dial (part 3) - machining

grindmn_dial | projects/grindmn/requirements.md section 5.1
Scale 1:1 (iso 2.5:1) mm 3rd angle

2026-11-06

SOLIDWORKS Educational Product. For Instructional Use Only.